

2020/2021 Safety, Control and Security



Product Index

Mirrors

3-20



Traffic Mirrors	3
Observation Mirrors (Industrial)	9
Traffic Mirrors	13
Observation Mirrors (General)	14
Inspection Mirrors	19
Accessories	20

Site Management

104-114



Traffic cones	104
Folding Traffic Signs	107
Trench Covers & Anti Climb Protection	108
Barrier Tapes & Stands	109
Crowd Barriers	110
Site Barriers	112

Impact Protection

21-54



Column/Pipe Protection	21
HD Bollards	24
Collision Protection Bars	26
Protection Guards	28
Impact Guard Rails & Railings	37
Pallet Racking Protectors	48
Column Protectors (Plastic)	54

Traffic Control and Parking Aids

115-132



Traffic Posts	115
Kerb Ramps	120
Hose/Cable & HD Kerb Ramps	121
Parking Aids	125
Speed Reduction Ramps	128

Floor Marking and Repair

55-68



Anti-slip products	55
Floor Marking Tapes and Paints	57
Floor Safety Signs	65
Hazard Warning Tapes	67
Floor Repair	68

Gate and Height Barriers

133-146



Boom Barriers	133
Gate Barriers	139
Height Restriction Barriers	142

Warning and Protection Profiles

69-76



Impact Protection PU profiles	69
Wall Protection profiles	74
Corner Protection	75
Wall/Dock Protection (Industrial)	76

Public Spaces

147-160



Bollards	147
Railing Systems	150
Scooter Parking	154
Bicycle Stands	155
Stainless Steel Litter Bins	160

Barrier Chains

77-103



Chains	77
Chain Posts	80
Belt Posts	84
Belt Cartridges	87
Barrier Posts	90
Parking Posts	98

Alphabetical Index

161-162



- High optical quality
- Shock and impact resistant
- Minimal distortion
- Eye catching red/white surround
- 5 year guarantee against manufacturing faults



View-Ultra 1+ 2

VIEW-ULTRA Sekurit Glass Mirrors

The **VIEW-ULTRA** Sekurit convex mirror provides exceptional reflective qualities due to the uniformly even convex mirror surface. It is highly suitable for use where high demands are made on the optical qualities of the mirror image.

The Sekurit glass mirror is housed in a weather resistant white frame with red reflective sections, making the mirror impact and shock resistant and provides protection against injury (should the mirror break it shatters into small non-sharp beads).

The **VIEW-ULTRA** is particularly suitable for areas that demand high optical qualities such as traffic regulation, production processes, warehouses, manufacturing sites, marshalling yards, logistics depots etc.

The mirror is supplied complete with hot dip galvanised bracket to suit 76mm Ø post (108 mm Ø bracket available on request).

This mirror can also be supplied with heating elements (see below).



View-Ultra 3

We also supply mirror posts – see page 20 for details.



VIEW-ULTRA	Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1	400 x 600	6	10	240.15.611	1 / 2 days
2	600 x 800	12	15	240.19.897	
3	800 x 1,000	18	25	240.17.387	
With heater 1H/15W	400 x 600	6	11	240.15.372	5 / 10 days
With heater 2H/30W	600 x 800	12	17	240.16.854	
With heater 3H/45W	800 x 1,000	18	28	240.17.948	
Water resistant thermostat			1	245.12.536	5 / 10 days
Post clip adapter			4	245.11.059	
Bracket for 108mm Ø post, VIEW-ULTRA 1 + 2			5	245.17.933	
Bracket for 108mm Ø post, VIEW-ULTRA 3			5	245.11.151	

Traffic Mirrors



- High quality stainless steel
- Virtually indestructible
- Easy to install
- Resistant to chemicals
- Eye catching red/white surround
- 5 year guarantee against manufacturing faults

Note:
The **DURABEL** is manufactured entirely of Stainless Steel: mirror surface, frame, mounting bracket.

DURABEL Stainless Steel Mirrors

The **DURABEL** Stainless Steel mirror is a robust and economical traffic observation mirror, suitable for both Indoor and Outdoor applications. The highly polished mirror surface ensures that a clear image quality is maintained even under conditions of extreme heat, alkaline and chemical environments.

The mirror is supplied complete with bracket to suit 76mm Ø post.

This mirror is highly suitable for use in regulating traffic, manufacturing processes, warehouses, logistics depots, blind corners, bottlenecks, crossings etc.



We also supply mirror posts – see page 20 for details.



DURABEL	Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1	400 x 600	4	10	242.12.680	1 / 2 days
2	600 x 800	10	15	242.11.505	
3	800 x 1,000	15	22	242.10.092	



- Indoor and Outdoor use
- Exceptional image quality
- Mirror surface of Stainless Steel
- Virtually indestructible
- Inexpensive
- Eye catching red/white surround
- 5 year guarantee against manufacturing faults

DURABEL LITE *Stainless Steel Mirrors*

The **DURABEL LITE** is an inexpensive alternative to pure stainless steel convex mirrors. A highly polished distortion free stainless steel mirror face is mounted in a weather resistant ABS plastic frame which combines the cost advantages of plastic with the durability of stainless steel. This mirror is particularly suitable for installation in areas of high air pollution and vandalism. The **DURABEL LITE** offers a long life without loss of image quality making the mirror a very economic purchase.

The mirror is supplied complete with hot dip galvanised bracket to suit 76mm Ø post.

The **DURABEL LITE** is highly suitable for use in areas of traffic regulation, blind spots, production processes, warehouses, manufacturing sites, marshalling yards, logistics depots etc.

We also supply mirror posts – see page 20 for details.



DURABEL LITE	Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
LITE 1	450 x 600	6	8.5	242.20.223	5 / 10 days
LITE 2	600 x 800	10	13	242.26.946	
LITE 600	600 Ø	4	8.5	242.22.647	

Traffic Mirrors



- Effective in temperatures down to -20°C
- No power supply required.
- Easily installed
- Robust Stainless Steel
- Eye catching red/white surround
- 5 year guarantee against manufacturing faults



DURABEL IceFree Stainless Steel Mirrors


The unique **DURABEL IceFree** Stainless Steel mirror was developed to combat extreme weather conditions such as condensation and ice which affect the optical qualities of standard mirrors. The standard **DURABEL** Stainless Steel mirror is backed by a Thermo-active gel which regulates the temperature of the mirror surface, thus preventing the formation of condensation and ice.

The mirror back is formed in impact and UV resistant plastic material which protects the thermoactive layers.

The **DURABEL IceFree** has the added advantage over electrically heated mirrors in that it can be installed without having to provide power or in locations that do not have power available.

The mirror is supplied complete with bracket to suit 76mm Ø post.

The **DURABEL IceFree** is highly suitable for use in areas that experience changeable adverse weather conditions, traffic regulation, railway stations, airports etc.

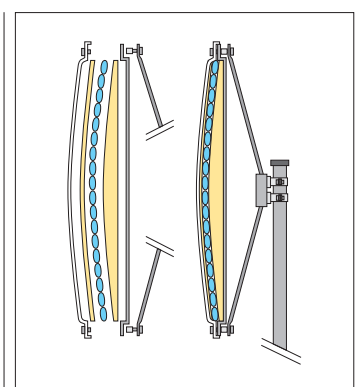

We also supply mirror posts – see page 20 for details.



DURABEL IceFree	Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
2	600 x 800	10	25	242.14.389	5 / 10 days
3	800 x 1,000	15	36	242.15.533	



- High quality stainless steel mirror surface
- Effective control down to -20°C
- No costly electric supply required
- Effectively reduces condensation and ice formation
- 5 year guarantee against manufacturing faults

DURABEL LITE IceFree Stainless Steel Mirror

The **DURABEL LITE IceFree** Stainless Steel mirror is a low cost alternative to our DURABEL IceFree mirror, but retains the tried and tested thermo-gel system which controls the surface temperature of the mirror based on the actual ambient temperature. This system prevents the formation of condense and ice on the mirror surface down to -20°C.

The mirror surface and universal mounting are manufactured in stainless steel with the housing manufactured in weather resistant white ABS complete with reflective red stripes.

This mirror is particularly suited for use in locations which experience extreme weather conditions and/or which do not have a suitable electric supply.

The universal clamp supplied can be used with posts of 60-90mm Ø with no requirement for adapters.

We also supply mirror posts (76mm Ø) – see page 20 for details.



Stainless Steel



5 year manufacturers guarantee

DURABEL IceFree ECO	Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1	450 x 600	6	15	242.24.151	5 / 10 days
2	600 x 800	10	23,5	242.27.488	5 / 10 days
3	600 Ø	6	15	242.20.096	5 / 10 days
4	800 Ø	10	23,5	242.28.986	5 / 10 days



- Indoor and Outdoor use
- Acrylic mirror
- High optical quality
- Easy to install
- Lightweight
- UV and weather resistant
- 5 year guarantee against manufacturing faults

VIEW-MINDER Acrylic Mirror

The **VIEW-MINDER** Traffic Mirror provides a winning combination of price, quality and safety that is hard to match. The mirror is suitable for Indoor and Outdoor applications, is light weight and possesses high optical qualities.

The **VIEW-MINDER** Traffic Mirror is manufactured from clear shock resistant acrylic which protects the metallised mirror coating, and is set into a UV resistant, corrosion proof and weather resistant plastic frame which has eye catching red reflective panels on a white background.

The mirror frame incorporates a bracket suitable for mounting onto a 76mm Ø post.

This mirror is highly suitable for use in traffic regulation, manufacturing processes, warehouses, logistics depots, blind corners, bottlenecks, crossings etc.

We also supply mirror posts – see page 20 for details.



VIEW-MINDER	Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1	400 x 600	5	5	243.10.847	1 / 2 days
2	600 x 800	10	7	243.12.742	
3	800 x 1.000	15	8	243.10.178	
4	1.000 x 1.200	22	11	243.25.569	5 / 10 days
600	600 Ø	4	5	243.10.158	1 / 2 days
800	800 Ø	8	7	243.12.563	
Adapter for 60mm Ø Post				245.18.573	1 / 2 days



- Indoor and Outdoor use
- Acrylic mirror
- High optical quality
- Easy to install
- Lightweight
- Corrosion free
- 5 year guarantee against manufacturing faults

VIEW-MINDER Industrial Duty Mirrors

The **VIEW-MINDER** Industrial Duty Mirror is designed to improve safety, security and productivity in the workplace. It can be positioned Indoors and Outdoors in sheltered locations and features a uniform curvature which allows for excellent image quality.

The **VIEW-MINDER** Industrial Duty Mirror is manufactured from clear shock resistant Acrylic which protects the metallised mirror coating, and is set into a plastic frame with a yellow and black surround which conforms to DIN 4844.

The mirror frame incorporates a bracket suitable for mounting onto a 76mm Ø post. An optional wall bracket for mounting on flat surfaces allows the mirror to be mounted in portrait mode or landscape mode.

This mirror is highly suitable for use in forklift traffic areas, manufacturing processes, warehouses, logistics depots, blind corners, bottlenecks, crossings etc.

We also supply mirror posts – see page 20 for details.




VIEW-MINDER Industrial Duty Mirrors	Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
G 1	400 x 600	5	4	253.15.681	1 / 2 days
G 2	600 x 800	10	6	253.16.706	
G 3	800 x 1.000	15	7	253.18.463	
G 600	600 Ø	4	4	253.17.516	
G 800	800 Ø	8	6	253.14.690	
Adapter for 60mm Ø Post				245.18.573	
Wall-mounting bracket (H x D x W) 190 x 270 x 76mm			2	253.19.463	

Observation Mirrors



- Indoor & Outdoor use
- Excellent image quality
- Easy & quick installation
- Light construction
- 5 year guarantee against manufacturing faults

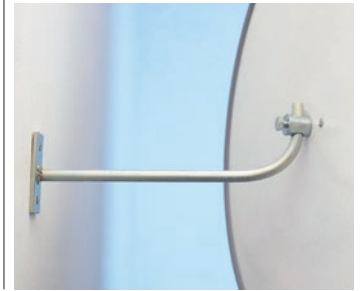

SPION Observation Mirror

The **SPION** observation mirror for Indoor and Outdoor use is ideal for monitoring traffic routes, machinery, blind spots etc.

The mirror is manufactured in shock resistant acrylic which protects the metallised mirror coating from scratching. It features a very light construction combined with excellent image quality and wide angle viewing.

The circular version of the **SPION** is supplied complete with a 25cm 'J' bracket for easy installation on flat surfaces (a post fixing kit is available – see table below), whilst the rectangular mirror is supplied complete with a post fixing bracket (60-76mm Ø posts).

We also supply mirror posts – see page 20 for details.



Description	Diameter of Mirror (mm)	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatc time (working days)
Mirror with 'J' bracket (25cm)	300 Ø	2	2	247.17.989	1 / 2 days
	400 Ø	3	3	247.13.962	
	500 Ø	5	4	247.14.455	
	600 Ø	7	5	247.19.332	
	700 Ø	9	6	247.18.522	
	800 Ø	11	7	247.18.504	
	Extended bracket 55cm			1	
Post fixing Kit				247.Pclip	
With brackets for fixing to 60 to 76mm Ø Posts	400 x 600	5	5	247.18.638	
	600 x 800	8	7	247.19.825	





- Indoor and Outdoor use
- High optical quality
- Frameless construction
- Shock and impact resistant
- Minimal distortion
- Resistant to adverse environmental conditions
- Eye catching red/white surround
- 5 year guarantee against manufacturing faults

S-COMPACT Sekurit Glass Mirrors

The **S-COMPACT Sekurit** convex mirror is a frameless mirror that features exceptional reflective qualities suitable for Indoor and Outdoor use, at an exceptionally low cost.

The **S-COMPACT** mirror features an eye-catching retro-reflective red-white border which is particularly effective in low light conditions. Sekurit glass is impact and shock resistant and provides protection against injury (should the mirror break it shatters into small non-sharp beads).

The **S-COMPACT** is particularly suitable for areas that demand high optical qualities such as traffic regulation, production processes, warehouses, manufacturing sites, marshalling yards, logistics depots etc.

The mirror is supplied complete with hot dip galvanised bracket to suit 76mm Ø post. (108mm Ø bracket is available on request).

We also supply mirror posts – see page 20 for details.



S-Compact	Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
C 1	400 x 600	5	9	241.11.666	1 / 2 days
C 2	600 x 800	10	14	241.11.928	
C 3	800 x 1,000	15	18	241.12.463	
Bracket for 108mm Ø Post			5	245.11.151	
Postclip adapter			4	245.11.059	

Observation Mirror

DETECTIVE-X Observation Mirror



The **DETECTIVE-X** observation mirror for Indoor use is ideal for where people circulate, affording observation where medium to large fields of vision are required.

The mirror is manufactured in shock resistant acrylic which protects the metallised mirror coating from scratching. It features a very light construction which eliminates risks associated with glass mirrors. This mirror is ideal for use in retail outlets, warehouses, public buildings and manufacturing sites etc.

The **DETECTIVE-X** is supplied complete with 25cm 'J' bracket for easy and fast installation. A 55cm bracket is available as an option.

We also supply mirror posts – see page 20 for details.

- Indoor use only
- Excellent image quality
- Easy & quick installation
- Light construction
- Helps reduce accidents & theft
- 5 year guarantee against manufacturing faults



Diameter of Mirror (mm)	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
300	2	1,7	251.13.487	1 / 2 days
400	3	2	251.17.667	
500	5	2,5	251.18.945	
600	7	3	251.15.534	
700	9	5	251.16.210	
800	11	6	251.13.505	
Extended arm fitment 55cm		1	255.10.700	
Post Fixing Kit			247.Pclip	

DETECTIVE Observation Mirror – Magnetic



A circular convex mirror equipped with a magnetic foot, ideal for situations that require temporary or semi-permanent applications either Indoors or sheltered Outdoor situations.

The mirror is manufactured in shock resistant acrylic which protects the metallised mirror coating from scratching. It is of light construction and possesses excellent image quality.

The **DETECTIVE** Convex mirror is supplied complete with a magnetic 200mm flexible arm for easy and fast installation.

- Indoor and sheltered Outdoor use
- Excellent image quality
- Easy & quick installation
- Light construction
- Easily fixed to flat steel surfaces
- 5 year guarantee against manufacturing faults



Diameter of Mirror Ø (mm)	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
300	3	2,5	252.25.675	1 / 2 days
450	5	3	252.29.230	
600	7	4	252.28.369	5 / 10 days



- Indoor and Outdoor use
- High optical quality
- UV and weather resistant
- Shock and impact resistant
- Easily installed
- Lightweight construction
- Indoor and Outdoor use
- 5 year guarantee against manufacturing faults



MIRROR-MAX Acrylic Mirrors

The **MIRROR-MAX** is a compact 180° mirror offering wide angle views, enabling it to replace two conventional traffic mirrors at 'T' junctions, making the **MIRROR-MAX** a very cost effective solution.

The **MIRROR-MAX** is manufactured in shock resistant acrylic material which protects the metallised mirror coating from scratching. It possesses excellent optical qualities and is of very light construction.

The **MIRROR-MAX** is particularly suitable for traffic junctions, private and public, manufacturing processes, confined spaces, gatehouses etc.

The mirror is supplied complete with hot dip galvanised bracket to suit 76mm Ø post, and can be mounted vertically or horizontally.

We also supply mirror posts – see page 20 for details.



Mirror size W x H x D (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
750 x 400 x 160	5	5	246.14.036	1 / 2 days
850 x 420 x 190	7	7	246.17.210	
Adapter for 60mm Ø Post			245.18.573	

Observation Mirrors

Mirrors

DETECTIVE Acrylic Convex Mirror



A triangular mirror ideal for Indoor use where observation distances are short, ideal for use in retail stores, supermarket checkouts, production lines etc.

The mirror is manufactured in shock resistant acrylic which protects the metallised mirror coating from scratching. It is of light construction and possesses excellent image quality. It is supplied complete with a flexible arm and 'G' bracket.

- Indoor use only
- Excellent image quality
- Easy & quick installation
- Light construction
- Easily installed on flat surfaces & posts
- 5 year guarantee against manufacturing faults



Mirror size (mm) Ø	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
330	2	2	252.10.021	1 / 2 days

MIRROR-MASTER Acrylic Fork Lift Truck Mirror



The rear view mirror that is an essential aid to fork lift truck drivers everywhere and which increases spatial awareness. The **MIRROR-MASTER** reduces driver fatigue, thus creating a safer working environment.

The mirror is manufactured in a smart black surround and features shock resistant acrylic which protects the metallised mirror coating from scratching. It is of light construction and possesses excellent image quality. It is supplied complete with all necessary fixings to attach to the safety cage.

NEW: Now with ball & socket joint for quick and easy adjustment.

- Indoor and Outdoor use
- Excellent image quality
- Easy & quick installation
- Light construction
- Wide angle views
- 5 year guarantee against manufacturing faults



Mirror size (mm) W x H x D	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
270 x 135 x 75	1	0,75	254.16.897	5 / 10 days




- Indoor use only
- Excellent image quality
- Light construction
- 360° viewing angle
- 5 year guarantee against manufacturing faults

PANORAMIC 360 Acrylic Mirrors

The **PANORAMIC 360** Mirror range is an indispensable safety aid to areas that experience high traffic flow. The 360° field of vision contributes to safety and improves traffic flow. This mirror can be screwed directly to flat surfaces or can be suspended using the optional chain set.

The mirror is manufactured in shock resistant acrylic which protects the metallised mirror coating from scratching. It is of light construction and possesses excellent image quality.

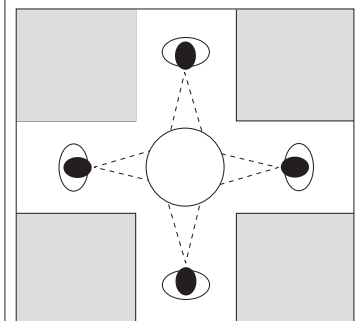

Mirror Ø (mm)	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
600 x 250	3	5,5	250.15.138	1 / 2 days
800 x 300	4	7	250.17.220	
900 x 340	5	9	250.10.202	
1,000 x 380	6	11	250.18.256	
1,250 x 420	8	32	250.13.084	
Chain set (Chain length 4m), for suspended fitting		0,7	255.10.618	

Observation Mirrors


PANORAMIC 180 Acrylic Mirrors



The **PANORAMIC 180** convex mirror provides safety and supervisory capabilities in areas such as narrow passages, corridors and blind spots, making this ideal for use in hospitals, hotels, public buildings, retail outlets etc.

The mirror is manufactured in shock resistant acrylic which protects the metallised mirror coating from scratching. It is of light construction and possesses excellent image quality.

- Indoor use only
- Excellent image quality
- Light construction
- 180° viewing angle
- 5 year guarantee against manufacturing faults



Mirror size (mm) W x H x D	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
600 x 320 x 240	5	3	256.17.911	1 / 2 days
800 x 410 x 330	6	3,5	256.14.205	
900 x 450 x 250	7	4	256.16.959	
1,000 x 530 x 400	8	4,5	256.17.882	

PANORAMIC-180WA Observation Mirror with Frame



The **PANORAMIC-180WA** is a wide angle view mirror which provides clear vision in sensitive areas that require monitoring.

Manufactured in lightweight acrylic which protects the mirror coating, it also features a back panel which enables it to be mounted at any height on a wall. The back panel also acts to protect the mirror against dust and dirt and facilitates easy cleaning.

It is particularly useful in narrow, highly frequented corridors that have blind corners, such as in hospitals, care homes, warehouses, industrial premises, retail outlets, multi-story car parks etc.

Rear panel equipped with pre-drilled holes for easy and quick installation.

Shallow depth means mirror protrudes less from wall.

- Indoor use
- Excellent vision
- Light acrylic with protective cover
- 180° field of view
- Slim line profile



Mirror size (mm)	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
600 x 300 x 165	5	4	256.28.313	5 / 10 days


PANORAMIC 90 Acrylic Mirrors



The **PANORAMIC 90** convex mirror provides safety and supervisory capabilities in areas such as narrow passages, corridors and blind spots, making this ideal for use in hospitals, hotels, public buildings, retail outlets etc. Suitable for corner mounting.

The mirror is manufactured in shock resistant acrylic which protects the metallised mirror coating from scratching. It is of light construction and possesses excellent image quality.

- Indoor use only
- Excellent image quality
- Light construction
- 90° viewing angle
- 5 year guarantee against manufacturing faults



Mirror size (mm) W x H x D	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
300 x 300 x 240	3	2	257.17.652	1 / 2 days
400 x 400 x 330	4	2,5	257.17.048	
420 x 420 x 360	5	3	257.13.342	
490 x 490 x 400	6	3,5	257.16.835	

DETECTIVE Wall Mounted Convex Mirrors



The **DETECTIVE** range of wall mounted convex mirrors are designed for use where space is at a premium. Ideal for applications in workshops, offices, retail shops, reception areas etc.

The mirror is manufactured in shock resistant acrylic which protects the metallised mirror coating from scratching. It is of light construction and possesses excellent image quality and is available in rectangular or circular form.

- Indoor use only
- Excellent image quality
- Light construction
- Easily fixed to wall
- 5 year guarantee against manufacturing faults



Mirror size W x H x D (mm)	Max. obs. dist. from mirror (m)	Delivery weight kg/ea.	Reference	Typical despatch time (working days)
360 x 260 x 75	3	1	252.20.171	1 / 2 days
520 x 320 x 85	5	2	252.20.458	
450 Ø x 100	4	1,5	252.20.842	
600 Ø x 130	6	2	252.26.285	5 / 10 days
800 Ø x 180	9	3	252.20.017	

Observation Mirrors

Mirrors

ANTI-VANDAL Stainless Steel Mirror



A circular convex mirror manufactured in high quality Stainless Steel providing an excellent image, ideal for areas subject to vandalism in both Indoor and Outdoor situations. Easily installed using the Clutch Head security screws supplied.

Typical application areas include underground railways, train stations, underpasses, prisons, psychiatric institutions and many others.

- Indoor and Outdoor use
- Excellent image quality
- Anti-vandal
- Easy & quick installation
- Light construction
- 5 year guarantee against manufacturing faults



Mirror size Ø x D (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
500 x 80	6	3	252.21.125	5 / 10 days
Clutch-head screws 10 x 38mm (Supplied)		0,2	245.27.882	

INSTITUTIONAL Wall Mounted Stainless Steel Security Mirror




The **INSTITUTIONAL** mirror is a high quality anti-vandal mirror manufactured in Stainless Steel which provides a brilliant clear image. Essential in applications with a high risk of vandalism, it provides a high level of enhanced safety and security of staff, inmates and patients.

This mirror is ideal for Indoor applications in prisons, courts, police and military stations, hospitals, mental institutions.

The mirror is secured by means of a coated steel frame, which has countersunk screw holes which accommodate clutch head security screws (7 per mirror provided), ensuring the mirror assembly cannot be tampered with.

- For Indoor use
- Manufactured in Stainless Steel
- Anti-vandalism
- Ideal for Security areas
- Brilliant clear image

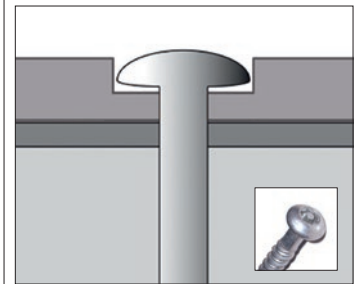

Mirror size W x H (mm)	Max. obs. dist. from mirror (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
250 x 250	4	3,5	258.25.964	5 / 10 days
500 x 250	5	5,5	258.27.080	
Clutch-head screws 10 x 38mm (Supplied)		0,2	245.27.882	

VISION Inspection Mirrors – With Castors



The **VISION** Inspection Mirror is essential for inspecting the underside of all types of vehicles, and other situations where security is a priority. Easy to use and manoeuvre due to mirror being equipped with four roller castors and with a two part extending aluminium handle (100 to 200cm).

This mirror is ideal for under vehicle inspections at ports, airports, military bases and other areas where security is an important factor.


The **VISION** mirror is manufactured from clear shock resistant acrylic which protects the metallised mirror coating. It is ideal for Indoor and Outdoor use and a handy storage bag is included.

Option: Also available is a battery powered LED lamp with an adjustable plate which fits to the mirror and directly illuminates the area being inspected (3 x AAA Batteries supplied.)

- Indoor and Outdoor use
- Acrylic mirror
- Wide field of view
- Easy to use
- Brilliant clear image



VISION Inspection Mirrors – Hand held

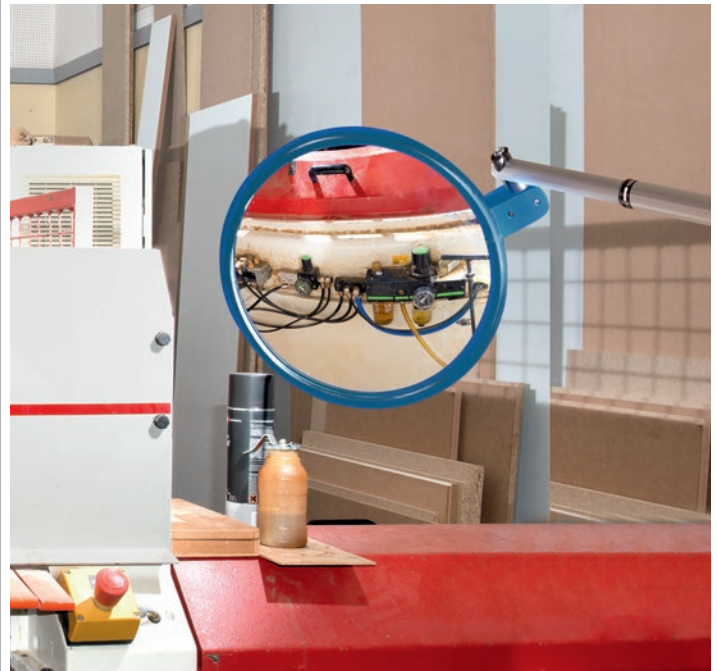

The **VISION** Inspection Mirror is ideal for inspecting hard to reach areas such as blind spots in industrial machinery etc. The mirror is supplied with a 2 part extending aluminium pole (100 to 200cm) to enable extended viewing. For conditions of poor light an LED lamp is available as an optional accessory.

This mirror is ideal for internal vehicle inspections etc. at ports, airports, military bases and other locations etc.

The **VISION** mirror is manufactured from clear shock resistant acrylic which protects the metallised mirror coating. It is ideal for Indoor and Outdoor use and a handy storage bag is included.

Option: Also available is a battery powered LED lamp with an adjustable plate which fits to the mirror and directly illuminates the area being inspected (3 x AAA Batteries supplied.)

- Indoor and Outdoor use
- Acrylic mirror
- Wide field of view
- Easy to use
- Brilliant clear image



Mirror size Ø (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
450	4,5	248.17.593	1 / 2 days
LED Inspection Lamp	0,1	248.14.031	

Mirror size Ø (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
230	2	248.14.221	1 / 2 days
LED Inspection Lamp	0,1	248.14.031	

Mirror Accessories

Posts



For the permanent mounting of mirrors.

Post 76mm Ø


2.5mm Wall thickness.

Hot Dip Galvanised.

With plastic cap.

Root fix into concrete (with ground anchor supplied).


Wall Arm



Wall bracket for mirrors on vertical surfaces, either landscape or portrait.
Hot Dip Galvanised.

Mounting plate: 160 x 140 x 10mm.


Wall/Ceiling Post



For mounting mirrors on horizontal surfaces, such as walls, ceilings.
Hot Dip Galvanised.

Mounting plate: 160 x 140 x 10mm.

Fork Top

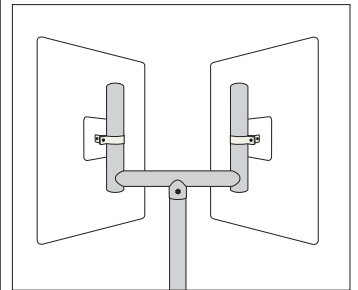

To fix two mirrors onto one post, wall arm or wall post.
Hot Dip Galvanised.

Description	For mirror size	Size (mm)	Type of mounting	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Galvanised Post 76mm Ø	All	3,000	Root fix into concrete	15	310.13.098	1 / 2 days
		3,500		17	310.11.268	
		4,000		19	310.11.638	
Wall Arm	All	400 H x 500 B	Vertical surfaces	6,5	245.10.893	
Wall Post	Models 1, 2	800 H	Horizontal surfaces	6,5	245.10.251	
	Model 3	1.200 H		9	245.12.944	
Fork Top	Model 1	400 H x 650 B	To fix two mirrors onto one post, wall arm or wall post	8,5	245.11.264	
	Models 2, 3	400 H x 900 B		9,5	245.11.466	



- For Indoor and Outdoor use
- Strong steel protection
- 'One way' assembly
- Isolates column from impact shock



Collision Protection

TRAFFIC-LINE Column Protectors

These highly versatile Column Protectors provide strong protection for vulnerable columns, exposed pipework etc. against damage by motorised transport.

Easily installed by sliding the cross members into each other and bolting to the ground through the pre-drilled base plates.

Many uses around warehouses, logistics depots, street posts and trees, factories, public buildings and spaces etc.



Finish:

Indoor use only:
Powder coated yellow

Indoor and Outdoor:
Hot Dip Galvanised.
Hot Dip Galvanised and powder coated yellow with black bands.

Specifications:

Tube: 60mm/48mm Ø
Wall thickness: 2mm
Fixing plates: 160 x 70 x 10mm
(Pre-drilled 4 holes)

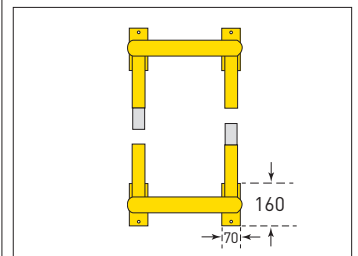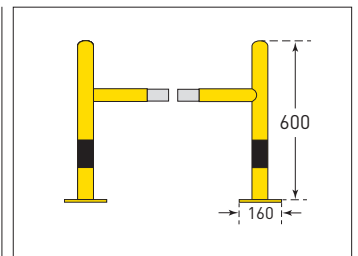

Powder Coated only			
Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
600 x 520 x 520 Internal: 400 x 400	14.5	200.26.557	5 / 10 days
600 x 620 x 620 Internal: 500 x 500	16	200.28.694	
600 x 720 x 720 Internal: 600 x 600	17.5	200.24.782	

Hot dip galvanised			
Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
600 x 520 x 520 Internal: 400 x 400	14.5	200.22.925	5 / 10 days
600 x 620 x 620 Internal: 500 x 500	16	200.29.787	
600 x 720 x 720 Internal: 600 x 600	17.5	200.26.195	

Hot dip galvanised and power coated			
Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
600 x 520 x 520 Internal: 400 x 400	14.5	200.20.623	5 / 10 days
600 x 620 x 620 Internal: 500 x 500	16	200.23.561	
600 x 720 x 720 Internal: 600 x 600	17.5	200.29.660	

Surface fixing bolt S14 (8 per guard)	10/100	0.2	109.17.393	1 / 2 days
Through bolt anchor (8 per guard)	12/120	0.3	109.24.665	

Collision Protection

TRAFFIC-LINE Vertical Pipe Protectors Wall and Ground Fixing




The **TRAFFIC-LINE** Pipe/Cable Guard provides protection for exposed down pipes against accidental damage from passing vehicles with wall and ground fixing plates providing secure anchorage.

Strong tubular construction affords a high degree of protection in factories, warehouses, distribution depots, public buildings, office blocks etc.

Finish:
Indoor and Outdoor use: Hot Dip Galvanised and powder coated yellow with black bands.

Specifications:
Tube: 48mm Ø
Wall thickness: 2mm
Fixing plates: 150 x 50 x 10mm
Internal dimensions: 250 x 275 (W x D)

- For Indoor and Outdoor use
- Strong steel protection
- Easily and quickly installed
- Highly visible yellow and black marking

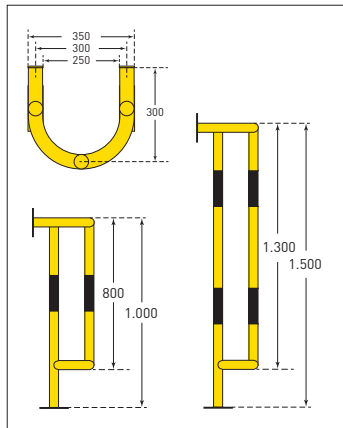

Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1,000 x 350 x 300	15	200.27.919	5 / 10 days
1,500 x 350 x 300	21	200.20.402	

Surface fixing bolt S12 (8 per guard)

TRAFFIC-LINE Vertical Pipe Protectors Wall Fixing




The **TRAFFIC-LINE** Pipe/Cable Guard provides protection for exposed down pipes against accidental damage from passing vehicles etc. Strong tubular construction complete with wall fixing plates affords a high degree of protection in factories, warehouses, distribution depots, public buildings, office blocks etc.

Finish:
Indoor and Outdoor use: Hot Dip Galvanised and powder coated yellow with black bands.

Specifications:
Tube: 48mm Ø
Wall thickness: 2mm
Fixing plates: 150 x 50 x 10mm
Internal dimensions: 250 x 275mm (W x D)

- For Indoor and Outdoor use
- Strong steel protection
- Easily and quickly installed
- Highly visible yellow and black marking

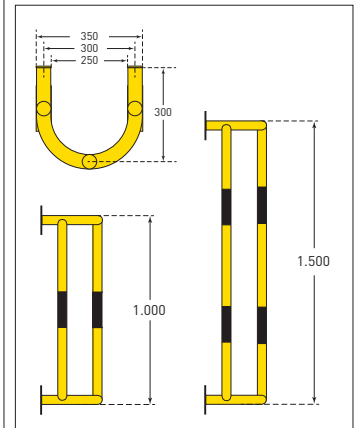

Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1,000 x 350 x 300	15	200.28.423	5 / 10 days
1,500 x 350 x 300	21	200.20.616	

8/100 0.2 109.17.393 1 / 2 days

TRAFFIC-LINE Pipe/Cable Guard




The **TRAFFIC-LINE** Pipe/Cable Guard provides protection for exposed down pipes, cables and cable runs against accidental damage from forklift trucks, cars etc.

The 'U' shaped guard with 4 keyhole slots is easily and quickly installed providing protection in areas such as manufacturing sites, warehouses, logistics depots, utility sites, public buildings, chemical plant, car parks etc.

Specifications:

Internal dimensions: 200 x 230 (W x D)
Wall thickness: 4mm



- For Indoor and Outdoor use
- Easily and quickly installed
- Strong steel profile for maximum protection
- Highly visible yellow and black marking

Finish:

Indoor use: Powder coated yellow with black stripes.
Outdoor use: Hot Dip Galvanised.



Finish	Dimensions (mm) Height/width	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot dip galvanised	300 x 292 x 230	7	200.26.403	1 / 2 days
Powder coated yellow			200.28.445	
Hot dip galvanised	500 x 292 x 230	12	200.26.783	
Powder coated yellow			200.20.282	
Surface fixing bolt S14		0,2	109.17.393	1 / 2 days

TRAFFIC-LINE 360° Column Protector



Provides all-round 360 ° protection against damage from collision for free-standing posts, columns and masts.

Two-part steel structure manufactured from formed 48mm Ø tubing.

Ideal for use in public spaces, depots, freight yards, car parks etc.

Easily assembled and installed:

The formed tube sections are located around the object to be protected and pushed into each other and secured with bolts. This strong unit is then anchored with 4 base plates to the ground.


Finish:

Hot-dip galvanised
Hot-dip galvanised and powder coated yellow

- High-grade steel guard
- Effective all-round protection
- Easily installed

Specifications:

Height: 600mm
Outer Ø: 350mm
Inner Ø: 254mm
Formed tube Ø: 48mm
Wall thickness: 2mm
Legs: Ø 33.7 x 2mm
Base plates: 115 x 32 x 5mm (Pre-drilled 2 holes)

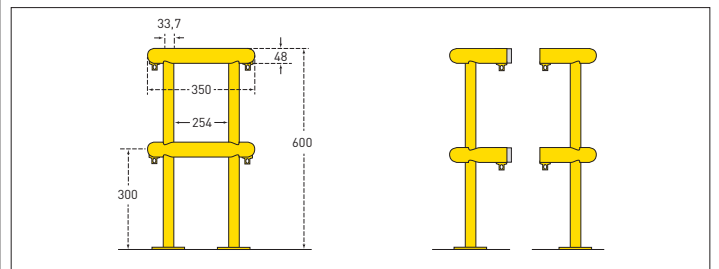

Finish	Dimensions (mm) Height/width	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot dip galvanised	600 x 350 x 350 Ø inner 254 mm	13	200.26.309	5/10 days
Hot dip galvanised and powder coated yellow			200.21.992	5/10 days

Collision Protection



- For Indoor and Outdoor use
- High quality steel
- Heavy duty protection
- Thick wall gauge
- Highly visible yellow and black marking



BLACK BULL Heavy Duty Bollards



A comprehensive range of Heavy Duty bollards with a wide range of protective capabilities, designed to meet most eventualities ranging from medium to extremely heavy impacts.

Produced in high quality steel, these bollards are highly suitable for protecting storage areas, traffic routes and work areas. They are also useful in protecting machinery, pillars, loading ramps and bays, entrances etc.

Types L to XXL are particularly suitable for areas of high risk of collisions such as HGV and forklift traffic, driveways, corners of buildings etc. Type S is usually employed where space is restricted. The Type S Bollard can also be fitted with

our patented FLEX Pad. See page 44 for FLEX Pad details.

Type XXL is equipped with a removable cap, which enables the bollard to be filled with concrete when installed in situ if required.

Finish:

Hot Dip Galvanised and powder coated yellow with black bands.

Hot Dip Galvanised and powder coated white with red bands.



Note:

We can also supply removable and/or lockable versions of the range by triangular key or cylinder lock. Bollards from type L upwards are supplied with lifting aid feature. Please ask for details (Except Type XXL).



Model		Dimensions (mm) Ø x WT x height	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
S	Surface fix Base plate 200 x 200 x 10mm	90 x 3,6 x 1,200	yellow-black	14,5	199.19.943	1 / 2 days
			white-red		199.29.625	5 / 10 days
	Root fix	90 x 3,6 x 1,600	yellow-black	16,5	199.17.454	1 / 2 days
			white-red		199.88.378	5 / 10 days
L	Surface fix Base plate 250 x 250 x 15mm	159 x 4,5 x 1,200	yellow-black	33,5	199.16.549	1 / 2 days
			white-red		199.88.077	5 / 10 days
	Root fix	159 x 4,5 x 1,600	yellow-black	35,5	199.15.852	1 / 2 days
			white-red		199.88.026	5 / 10 days
XL	Surface fix Base plate 250 x 250 x 15mm	194 x 4,5 x 1,200	yellow-black	42	199.15.151	5 / 10 days
	Root fix	194 x 4,5 x 1,600		44	199.19.836	
XXL	Surface fix Base plate 350 x 350 x 15mm	273 x 5,0 x 1,200		51	199.19.146	
	Root fix	273 x 5,0 x 1,600		53	199.13.769	
Surface fixing bolts for models S + L (4 per bollard)		14/110		0,2	109.18.268	1 / 2 days
Surface fixing bolts for models XL + XXL (4 per bollard)		16/140		0,3	109.14.550	

BLACK BULL FLEX Heavy Duty Bollards



The "smart" protection bollard – yields up to 25° from centre when hit helping to reduce damage to bollard, vehicle and floor.

A combination of internal spring and an elastic polyurethane (PU) buffer effectively absorbs the impact force (progressive force absorption), and returns the bollard to original upright position. Ideal for the protection of high traffic areas, loading bays, site entrances etc.

Specifications:

- 159mm Ø
- 4.5 Wall thickness
- Base plate: 270mm Dia. x 10mm

- For Indoor and Outdoor use
- High quality steel
- Heavy duty protection
- Flexes up to 25° and returns to the vertical
- Highly visible yellow and black marking

Finish:

- Indoor use: Powder coated yellow with black bands.
- Outdoor use: Hot Dip Galvanised & powder coated yellow with black bands.



Finish	Dimensions (mm) H x Ø	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Powder coated	665 x 159	18	199.23.867	5 / 10 days
Hot dip galvanised			199.28.165	
Powder coated	965 x 159	26	199.25.732	
Hot dip galvanised			199.27.906	

Root fixing adapter, Size 200 x 200 x 10mm, 76 Ø	5	199.25.395	
Surface fixing bolt S12 (4 per bollard)	0,2	109.17.393	1 / 2 days
Through bolt anchor (4 per bollard)	0,3	109.24.665	

BLACK BULL FLEX Heavy Duty Bollards, rotating



Utilising the same technology as the FLEX bollard but with the addition of six heavy duty ball-bearings housed in the bollards base, which enable the bollard to rotate freely on its heavy-duty steel base plate. This additional feature enables the bollard to flex and to rotate if impacted.

The result is that the bollard yields to frontal impacts, whilst lateral impacts are deflected by the rotational action, thus reducing costly damage to property and vehicles.

- Indoor use
- High quality steel
- Energy absorption
- Flexes and rotates
- Self-righting

Manufactured from high grade steel, the bollard flexes up to a maximum of 25° (approx. 310mm) from the vertical, then will return automatically to the upright position.

Ideal for protecting roller shutters, fire gates, ramps, crossings etc.

Specifications:

- 159mm Ø
- 4.5mm Wall thickness
- Base plate: 270mm Ø x 35mm

Finish:

- Powder coated yellow with black bands.
- Standard fixing – Surface.
- Sub-surface fixing available.



Finish	Dimensions (mm) H x Ø	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Powder coated	700 x 159	36	199.22.128	5 / 10 days
	1,000 x 159	42	199.25.417	

Collision Protection



- For Indoor use only
- High quality steel
- Easily and quickly installed
- Low profile design
- Highly visible yellow and black marking

BLACK BULL Collision Protection Bars



BLACK BULL Collision Protection Bars provide low cost protection for plant and machinery from forklift trucks, roller containers, trolleys, pallet trucks etc. Additionally they can be used to protect shelving and wall mounted equipment such as instruments, switch cabinets, first aid equipment etc. Due to their low profile they allow easy pedestrian access to protected areas.

Manufactured from high quality seamless steel tube with 45° tapered ends and strong fixing plates 10mm thick.

Specifications:

76mm Ø
3mm wall thickness
Base plate: 130 x 70 x 10mm


Finish:

Powder coated yellow with black bands.

Also available is a corner protection guard to the same high standards as the Collision Bars above.

Note:

We can supply special lengths and versions for roof-fixing on request.

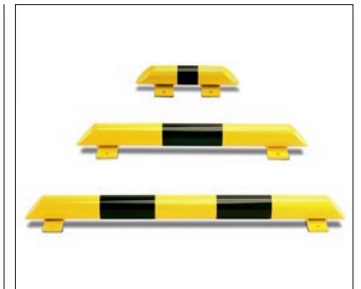

Description	Height/length (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Collision Protection Bars	86 x 400	5	199.13.478	1 / 2 days
	86 x 800	7,5	199.19.220	
	86 x 1,200	10	199.14.143	
Surface fixing bolt S14		0,2	109.17.393	
Through bolt anchor (4 required per guard)		0,3	109.24.665	
Corner Collision Protection Bars	86 x 638 x 638	11	199.22.677	5 / 10 days
Surface fixing bolt S12		0,2	109.17.393	1 / 2 days
Through bolt anchor (6 per guard)		0,3	109.24.665	



- Indoor use
- High quality steel tube
- Available in various lengths
- Individual elements or continuous length installations
- Integrated cable/hose conduit



BLACK BULL Raised Collision Protection Bars



This innovative Collision Protection system is ideal for separating traffic lanes and for protecting personnel, work areas, equipment and machinery etc.

The **BLACK BULL Raised Collision Bars** are manufactured in high quality thick walled steel tubes which are welded to metal uprights. These are then welded onto solid steel base plates 10mm thick. All metal work is powder coated yellow with black moulded plastic plugs inserted in the tube ends.

The Collision Bars are available in standard lengths which can, if required, be made into longer continuous lengths by means of connecting adapters. Please advise at time of ordering.



BLACK BULL Raised Collision Bars are secured to the floor with rawl plug bolts or through bolts. (Supplied separately).

A 50mm Ø hole is drilled into each upright which provides a conduit for cables/airlines etc. up to 48mm Ø.

Specification:

Diameter: 76mm Ø
 Wall thickness: 3mm
 O/all height: 200mm
 Base plate: 160 x 140 x 10mm
 Finish: Powder coated
 Colour: Yellow

Available in special lengths (on request)

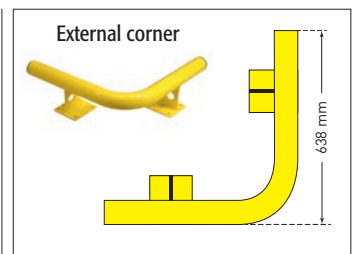

**Can be upgraded to FLEX version:
 Max. yield angle 10°.**

Description	Number of bolts required	Dimensions (mm) H x L	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Raised Collision Bars	8	200 x 1,000 x 160	12,5	202.29.766	5 / 10 days
		200 x 1,500 x 160	15	202.24.306	
	12	200 x 2,000 x 160	20,5	202.27.522	
Corner element	External corner	200 x 638 x 638	12,5	202.27.943	
	Internal corner			202.24.284	
Connecting Adapter			0,5	202.29.983	
End cap, black			0,1	202.20.854	
Surface fixing bolt S12			0,2	109.17.393	
Throughbolt anchor			0,3	109.24.665	1 / 2 days

Collision Protection



- For Indoor and Outdoor use
- High quality steel
- High impact resistance
- Highly visible yellow/black markings
- Easily installed

BLACK BULL Protection Guards



Manufactured from seamless high quality tube, these guards are bent as one piece to provide strong and effective collision protection in vehicle routes, work and inventory areas. They can be used for separating vehicle and pedestrian routes, protect machinery, pillars, racking, loading ramps etc.

Specification:

76mm Ø x 3mm Wall
 Base Plate: 160 x 140 x 10mm
 (Drilled 4 fixing holes)

Finish:

Indoor use: Powder coated yellow with black bands.
 Outdoor use: Hot Dip Galvanised and powder coated yellow with black bands.

Root-fix versions, special sizes and colours can be manufactured to order. Please ask for details.



Powder coated				
Description	Height/length (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Yellow with base plate	350 x 375	10	195.15.621	5 / 10 days
Yellow/black bands with base plate	350 x 750	12	195.14.450	1 / 2 days
	350 x 1.000	13	195.14.589	
	350 x 2.000	17	195.29.703	5 / 10 days
	600 x 750	14	195.18.515	1 / 2 days
	600 x 1.000	16	195.18.943	
	600 x 2.000	19	195.23.098	5 / 10 days
	1.200 x 750	20	195.19.573	1 / 2 days
	1.200 x 1.000	22	195.17.903	
1.200 x 2.000	25,5	195.21.170	5 / 10 days	
Surface fixing bolt size 8/100 (8 per guard)		0,2	109.17.393	1 / 2 days
Through bolt anchor size 12/120 (8 per guard)		0,3	109.24.665	



TRAFFIC-LINE Steel Hoop Guards – Light Duty



Collision Protection



Can be used in conjunction with BLACK BULL Corner Protection Guards. See page 35.

These additions to our popular range of Hoop Guards are manufactured in 40mmØ steel with a 1.5mm wall thickness. Ideal for areas which require less heavy protection as provided by our standard range of Hoop Guards. Intended for indoor use only they are finished in an eye-catching powder coated yellow with black bands. Quickly and easily installed using 8 fixing bolts per guard.

- Indoor use only
- Available in various widths
- With reinforcing bar
- Cost effective

Ideal for use in segregating work zones in factories and warehouses etc.

Finish:
Indoor use only:
Powder coated yellow with black bands.

Diameter:
40mm Ø x 1.5mm wall thickness.

Mounting method:
For surface fixing:
Base plate 150 x 150 x 6mm.



Hot dip galvanised and powder coated				
Description	Height/length (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Yellow with base plate	350 x 375	10	195.18.233	5 / 10 days
Yellow/black bands with base plate	350 x 750	12	195.16.265	1 / 2 days
	350 x 1.000	13	195.13.499	
	350 x 2.000	17	195.22.846	5 / 10 days
	600 x 750	14	195.17.623	1 / 2 days
	600 x 1.000	16	195.19.157	
	600 x 2.000	19	195.28.325	5 / 10 days
	1.200 x 750	20	195.17.296	1 / 2 days
	1.200 x 1.000	22	195.18.822	
1.200 x 2.000	25,5	195.28.003	5 / 10 days	
Surface fixing bolt size 8/100 (8 per guard)		0,2	109.17.393	1 / 2 days
Through bolt anchor size 12/120 (8 per guard)		0,3	109.24.665	

Description	Height/length (mm)	Delivery weight. (kg/ea.)	Reference	Typical despatch time (working days)
Floor mounting With mounting plates 150 x 150 x 6mm	1,000 x 1,000	9	201.24.623	1 / 2 days
	1,000 x 1,500	11	201.28.976	
	1,000 x 2,000	13	201.25.587	5 / 10 days
Surface fixing bolt S12 (8 per guard)		0,2	109.17.393	1 / 2 days

Collision Protection



- Indoor and Outdoor use
- Additional reinforcing bar
- Four mounting options
- Various widths available
- Highly visible

TRAFFIC-LINE Steel Hoop Guards

Protect and segregate pedestrians, machinery and other zones from works vehicles etc.

Manufactured from 48mm Ø high quality steel tube with additional knee-bar for additional strength and rigidity, and finished in eye catching black/yellow powder coating.

Finish :

For Outdoor use: Hot dip galvanised and powder coated yellow with black bands.

For Indoor use: Powder coated yellow with black bands.

Diameter:

48mm Ø x 2mm wall thickness.

Mounting options:

For surface fixing:
Base plate: 160 x 70 x 10mm

For wall fixing (permanent):
2 x mounting plates with pre-drilled fixing holes.




For root fixing:
As per the details for permanent wall mounting, utilising welded mounting plates as ground anchors.

For wall fixing (removable):
2 x sockets with mounting plates pre-drilled fixing holes.

Additional options:

Galvanised only, special lengths and colours.



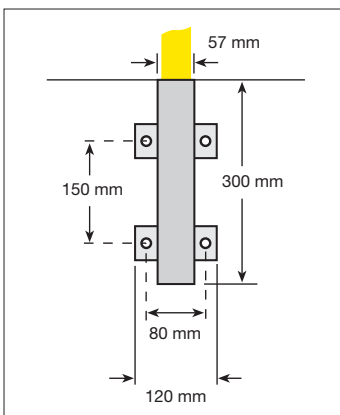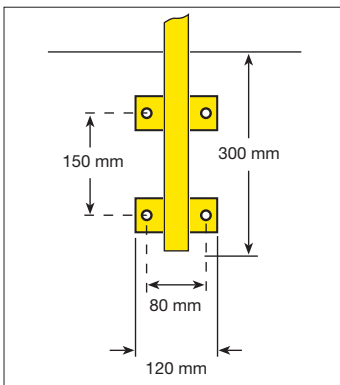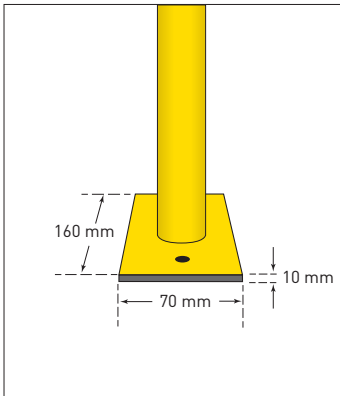

Descripton	Height/length (mm)	Finish	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	
Floor mounting	1,000 x 1,000	Powder coated	10	201.14.228	1 / 2 days	
		Hot dip galvanised and Powder coated		201.15.512		
With mounting plates 160 x 70 x 10 mm	1,000 x 1,500	Powder coated	12.5	201.15.794		
		Hot dip galvanised and Powder coated		201.17.982		
Yellow with black bands	1,000 x 2,000	Powder coated	15	201.14.465		
		Hot dip galvanised and Powder coated		201.13.553		
Surface fixing bolt S12 8/100 (4 per guard)			0.2	109.17.393		
Wall or root fixing	1,300 x 1,000	Powder coated	10.5	201.23.846		5 / 10 days
		Hot dip galvanised and Powder coated		201.23.287		
Yellow with black bands	1,300 x 1,500	Powder coated	13	201.21.475		
		Hot dip galvanised and Powder coated		201.27.174		
1,300 x 2,000	Powder coated	15.5	201.20.276			
	Hot dip galvanised and Powder coated		201.24.456			
Surface fixing bolt S12 8/100 (8 per guard)			0.2	109.17.393	1 / 2 days	
Wall fixing (Removable)	1,300 x 1,000	Powder coated	10.5	201.25.003	5 / 10 days	
		Hot dip galvanised and Powder coated		201.20.059		
Yellow with black bands	1,300 x 1,500	Powder coated	13	201.22.243		
		Hot dip galvanised and Powder coated		201.27.829		
1,300 x 2,000	Powder coated	15.5	201.21.658			
	Hot dip galvanised and Powder coated		201.21.335			
Wall socket (2 per guard) 120 W x 300 H		Hot dip galvanised	2	201.27.454	5 / 10 days	
Surface fixing bolt S12 8/100(8 per guard)			0.2	109.17.393	1 / 2 days	

Collision Protection


Collision Protection



- For Indoor and Outdoor use
- High quality steel
- Shock absorbing features
- UV and temperature resistant pads
- Highly visible yellow and black marking



BLACK BULL FLEX Protection Guards



A unique and patented development of our standard **BLACK BULL** Protection Guards that features the strength and protective attributes of steel combined with the ability to flex up to 10° from the vertical, reducing the incidence of damage and the need for repairs to both guard and vehicle. This is achieved by equipping the guard with flexible shock absorbing polyurethane (PU) pads. These pads are UV, weather and temperature resistant, making them suitable for indoor and outdoor use.

- Flexible and yielding guard
- Flexes up to 10° from vertical
- Minimises damage to vehicles
- Reduces damage to floor

Specifications:

76mm Ø x 3.0mm Wall

Base Plate: 160 x 140 x 10mm
(Drilled 4 fixing holes)

Finish:

Indoor use: Powder coated yellow with black bands.

Outdoor use: Hot Dip Galvanised and powder coated yellow with black bands.

Maximum inclination limits:

Height	Inclination
390mm	55mm
640mm	95mm
1.240mm	190mm



Upgradeable:

Existing **BLACK BULL** 76mm Ø Protection Guard installations can be upgraded. New cheme-anchor fixings will be required.


Powder coated				
Colour	Dimension (mm) H x W	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Yellow	390 x 375	10,6	196.21.558	5 / 10 days
Yellow with black bands	390 x 750	12,6	196.23.927	1 / 2 days
	390 x 1.000	13,6	196.20.479	
	390 x 2.000	17,6	196.23.138	5 / 10 days
	640 x 750	14,6	196.27.339	1 / 2 days
	640 x 1.000	16,6	196.29.617	
	640 x 2.000	19,6	196.28.884	5 / 10 days
	1.240 x 750	20,6	196.21.978	1 / 2 days
	1.240 x 1.000	22,6	196.21.739	
1.240 x 2.000	26,1	196.27.054	5 / 10 days	

Hot dip galvanised and powder coated				
Colour	Dimension (mm) H x W	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Yellow	390 x 375	10,6	196.24.195	5 / 10 days
Yellow with black bands	390 x 750	12,6	196.28.870	1 / 2 days
	390 x 1.000	13,6	196.28.678	
	390 x 2.000	17,6	196.29.639	5 / 10 days
	640 x 750	14,6	196.26.638	1 / 2 days
	640 x 1.000	16,6	196.21.658	
	640 x 2.000	19,6	196.20.921	5 / 10 days
	1.240 x 750	20,6	196.23.976	1 / 2 days
	1.240 x 1.000	22,6	196.29.532	
	1.240 x 2.000	26,1	196.22.922	5 / 10 days

Chemical anchors (Set of 8)	10/170	2,0	109.20.858	1 / 2 days
-----------------------------	--------	-----	------------	------------



- For Indoor and Outdoor use
- High quality steel
- Extremely strong protection
- Highly visible yellow and black marking

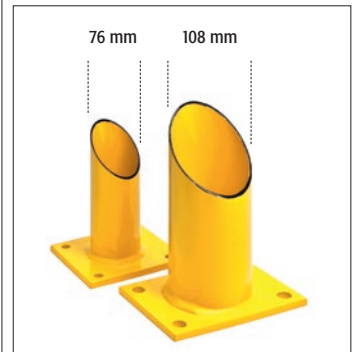

BLACK BULL Protection Guards XL



The **BLACK BULL** Protection Guards XL provide heavy duty protection to important and sensitive facilities in both indoor and outdoor situations. Manufactured in high quality seamless tube it is highly suitable to protect columns, pillars, pipes, building structures, machinery and plant etc.

Specifications:

108mm Ø x 3.6mm Wall

Base Plate: 200 x 140 x 10mm
(Drilled 4 fixing holes)

Finish:

Indoor use: Powder coated yellow with black bands.

Outdoor use: Hot Dip Galvanised and powder coated yellow with black bands.

Root-fix versions, special sizes and colours can be manufactured to order. Please ask for details.



Powder coated				
Colour	Dimensions (mm) H x W	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Yellow with base plate	600 x 650	17,5	195.23.294	15 / 20 days
Yellow/black bands with base plate	600 x 1.000	22	195.20.048	
	600 x 1.500	27,5	195.28.885	
	600 x 2.000	33,5	195.22.648	
	1.200 x 650	31	195.26.829	
	1.200 x 1.000	35	195.23.519	
	1.200 x 1.500	40,5	195.25.036	
	1.200 x 2.000	46,5	195.23.300	

Hot dip galvanised and powder coated				
Colour	Dimensions (mm) H x W	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Yellow with base plate	600 x 650	17,5	195.22.231	15 / 20 days
Yellow/black bands with base plate	600 x 1.000	22	195.23.338	
	600 x 1.500	27,5	195.28.652	
	600 x 2.000	33,5	195.20.481	
	1.200 x 650	31	195.27.565	
	1.200 x 1.000	35	195.26.554	
	1.200 x 1.500	40,5	195.26.278	
	1.200 x 2.000	46,5	195.28.961	

Surface fixing bolt (8 per guard)	16/140	0,3	109.14.550	1 / 2 days
-----------------------------------	--------	-----	------------	------------

Collision Protection

BLACK BULL

Protection Guards – Removable



Use **BLACK BULL** Removable Protection Guards wherever access is required from time to time to plant and machinery. These guards eliminate time consuming operations in removing permanently fixed Protection Guards

Specifications:

76mm Ø x 3mm Wall
Base Plate: 160 x 140 x 15mm
(Drilled 4 fixing holes)

The **BLACK BULL** Removable Protection Guards are easily installed by means of the anchor plates which are secured to the floor with anchor bolts (4 per plate & available at extra cost), position the legs

- For Indoor use
- High quality steel
- Strong effective protection
- Protect portable machinery and plant
- Highly visible yellow/black markings
- Quickly and easily installed

of the guard into the holes in the plates, slide the flanges under the lip and secure with screws provided. Cover plates are provided to reduce the ingress of dirt etc.

Finish:

Indoor use: Powder coated yellow with black bands.



Dimensions (mm) H x W	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
350 x 750	12,5	196.15.471	5 / 10 days
350 x 1.000	13,5	196.17.299	
600 x 750	14,5	196.17.689	
600 x 1.000	16,5	196.19.365	
Surface fixing bolt S12 (8 per guard)	0,2	109.17.393	1 / 2 days
Through bolt anchor (8 per guard)	0,3	109.24.665	

BLACK BULL

Protection Guards – with Under-run Protection



BLACK BULL Protection Guards – with Under-run Protection are to the same design and material specification as our **BLACK BULL** Protection Guards but with a 4mm Gauge steel plate integrated into the hoop, designed to prevent fork-lift truck forks damaging property and personnel.

Particularly effective in applications such as in warehouses, distribution depots, storage areas etc.

Size:

76mm Ø x 3mm Wall
Base Plate: 160 x 140 x 10mm
(Drilled 4 fixing holes)

Under-run plate heights:

150mm and 400mm

- For Indoor use
- High quality steel
- Strong effective protection
- Highly visible yellow/black markings
- Easily installed

Finish:

Indoor use: Powder coated yellow with black bands.

Root-fix versions, special sizes and colours can be manufactured to order. Please ask for details.



Height of underrun protection plate (mm)	Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
150	350 x 750	14,5	196.16.857	5 / 10 days
	350 x 1,000	17,5	196.15.132	
400	600 x 750	24	196.17.125	
	600 x 1,000	29	196.17.619	
Surface fixing bolt S12 (8 per Guard)		0,2	109.17.393	1/2 days
Through bolt anchor (8 per Guard)		0,3	109.24.665	1/2 days



- For Indoor and Outdoor use
- High quality steel
- Protects corners
- Withstands heavy impact forces

BLACK BULL Corner Protection Guards



Designed for protecting corners the **BLACK BULL** Corner Protection Guards manufactured in high quality 76mmØ seamless steel tube ensures a high degree of protection for vulnerable corners on vehicle routes, warehouses, production units etc. matching in with our **BLACK BULL** Protection Guards.

Specification:

76mm Ø x 3mm Wall

Base Plate: 160 x 140 x 10mm
(Drilled 4 fixing holes).

Finish:

Indoor use: Powder coated yellow with black bands, Powder coated white with red bands.

Outdoor use: Hot Dip Galv., powder coated yellow with black bands, Hot Dip Galv., powder coated white with red bands.

Root-fix versions, special sizes and colours can be manufactured to order. Please ask for details.



Powder coated				
Size (mm) H x W x D	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
350 x 600 x 600	yellow-black	20	195.13.241	5 / 10 days
	red-white		195.28.711	
600 x 600 x 600	yellow-black	24	195.14.637	
	red-white		195.27.199	
1,200 x 600 x 600	yellow-black	34	195.17.512	
	red-white		195.27.817	

Hot dip galvanised and powder coated				
Size (mm) H x W x D	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
350 x 600 x 600	yellow-black	20	195.14.708	5 / 10 days
	red-white		195.24.042	
600 x 600 x 600	yellow-black	24	195.17.083	
	red-white		195.28.676	
1,200 x 600 x 600	yellow-black	34	195.13.874	
	red-white		195.20.484	

Surface fixing bolt S14 (12 per guard)	10/100	0.2	109.17.393	1 / 2 days
Through bolt anchor (12 per guard)	12/120	0.3	109.24.665	

Collision Protection

Collision Protection

BLACK BULL Corner Protection Guards – with Under-run Protection



BLACK BULL Corner Protection Guards – with Under-run Protection are to the same design and material specification as our **BLACK BULL** Protection Guards but with a 4mm Gauge steel plate integrated into the hoop, designed to prevent fork-lift truck forks damaging property and personnel.

Particularly effective in applications such as in warehouses, distribution depots, storage areas etc.

Size:

76mm Ø x 3mm Wall
Base Plate: 160 x 140 x 10mm
(Drilled 4 fixing holes)

Under-run plate heights:

150mm and 400mm

Finish:

Indoor use: Powder coated yellow with black bands.

- For Indoor use
- High quality steel
- Strong effective protection
- Highly visible yellow/black markings
- Easily installed

Root-fix versions, special sizes and colours can be manufactured to order. Please ask for details.



Height of underrun protection plate (mm)	Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
150	350 x 600 x 600	22	196.22.305	5 / 10 days
400	600 x 600 x 600	34	196.27.835	
Surface fixing bolt S12 (12 per Corner Guard)		0,2	109.17.393	
Through bolt anchor (12 per Corner Guard)		0,3	109.24.665	

BLACK BULL Corner Protection Guards XL



The **BLACK BULL** Corner Guards XL provide heavy duty protection for important and sensitive facilities such as areas of damage to building fabric, sensitive machinery and plant, heavy duty protection in traffic aisles in warehouses and logistics depots.

Specifications:

108mm Ø x 3.6mm Wall.
Base Plate: 200 x 140 x 10mm.
(Drilled 4 fixing holes)

Finish:

Indoor use: Powder coated yellow with black bands.
Outdoor use: Hot Dip Galvanised and powder coated yellow with black bands.

- For Indoor and Outdoor use
- High quality steel
- Extremely strong protection
- Highly visible yellow and black marking

Root-fix versions, special sizes and colours can be manufactured to order.

Please ask for details.



Finish	Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Powder coated	600 x 900 x 900	42	195.23.857	15 / 20 days
Hot dip galvanised and powder coated			195.27.689	
Powder coated	1.200 x 900 x 900	55	195.27.431	
Hot dip galvanised and powder coated			195.23.796	
Surface fixing bolt S14 (12 per guard)		0,4	109.14.550	1 / 2 days



- Indoor and Outdoor use
- UV resistant Polyurethane
- Deflects up to 10 degrees
- Quickly and easily installed
- Can be fitted retrospectively

BLACK BULL FLEX Impact Guard Rails



A unique shock absorbing feature which is incorporated into the upright posts of the Guard Rail System. This is achieved by the addition of a polyurethane pad which is UV, weather and temperature resistant. The pad enables the Guard Rails to deflect up to 10 degrees. This allows the railing system to absorb shocks and impacts whilst damage is reduced significantly.


Reduces repairs and damage to floors.

Full information on Guard Rails can be found on pages 38–39.


Maximum inclination:

Post height 505mm =
80mm deviation from vertical.

Installed using 4 chemi-anchors per post.
Can also be used with MD railings, see pages 40-41.

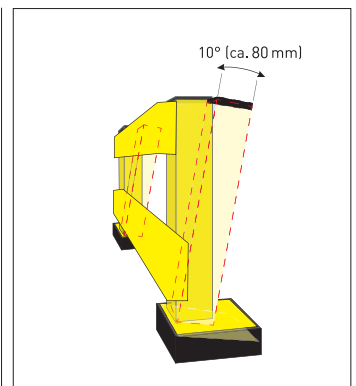

Shock absorbing pad for post			
Dimension (mm) H x D x W	Delivery weight. (kg/ea.)	Reference	Typical despatch time (working days)
10/170	2,0	109.20.858	5 / 10 days



Chemical ancor set (Set of 8)			
Dimension (mm) H x D x W	Delivery weight. (kg/ea.)	Reference	Typical despatch time (working days)
50 x 146 x 166	0,4	422.23.497	1 / 2 days


Collision Protection


Collision Protection




BLACK BULL Impact Guard Rails



Description	Support Post
	
Delivery weight (kg/ea.)	9.5
Powder coated	198.22.571
Typical despatch time (working days)	
Hot dip galvanised and powder coated	198.27.574
Typical despatch time (working days)	



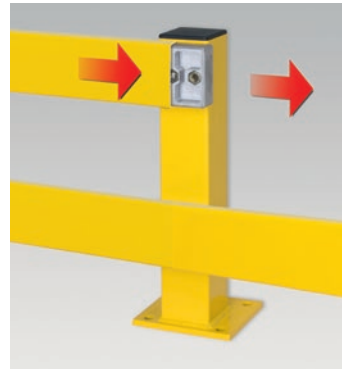

- Indoor and Outdoor use
- High quality steel
- Strong 'C' section rails
- Quickly and easily installed
- Innovative assembly method

BLACK BULL Impact Guard Rails provide a most effective and efficient method of protecting property, machinery and plant from damage by moving traffic. Extremely resilient to collisions from vehicular traffic.

Innovative connection system enables assembly by one man. Modular construction ensures the system is very easily extended/modified.

Specifications:

Support post: 465 x 80 x 80mm
3mm Wall thickness
With Black cap

Base plate: 160 x 140 x 10mm

Rails: 'C' Profile, 100 x 40mm
3mm Wall thickness

Finish:

For Outdoor use: Hot Dip Galvanised and Powder coated yellow.

For Indoor use: Powder coated yellow.

Option: Hot Dip Galvanised only.

Fixed 90° external and internal corner rails or alternatively an adjustable knuckle is available for adjustment between 90° and 180°.



Rail C-profile 100 x 40 x 3mm				Angle rail External Corner	Angle rail Internal Corner	Adjustable Knuckle Variable 90° to 180°
1,000	1,200	1,500	2,000			
9	11	13.5	17.5	6	6	2
198.21.933	198.21.114	198.26.826	198.26.176	198.23.160	198.26.087	198.22.565
5 / 10 days						
198.23.147	198.23.683	198.22.929	198.20.197	198.24.064	198.26.165	-
5 / 10 days						

Accessories	Dimensions (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
End cap for rails, black		0.1	198.26.315	5 / 10 days
Mounting plates for rails, Alu, hot dip galvanised and powder coated		1.5	198.25.794	
Surface fixing bolt S12 – (4 per post)	8/100	0.2	109.17.393	1 / 2 days
Through bolt anchor (4 per post)	12/120	0.3	109.24.665	




Collision Protection

Collision Protection



BLACK BULL MD Impact Protection System



Description	Support Posts 1,000 x 70 x 70mm		
	End Post	Centre Post	Corner Post
			
Delivery weight (kg/ea.)	10	10.5	10.5
Powder coated	194.24.261	194.29.943	194.29.694
Typical despatch time (working days)	5 / 10 days		
Hot dip galvanised and powder coated	194.25.033	194.20.894	194.21.831
Typical despatch time (working days)	5 / 10 days		





This highly visible Medium Duty Railing System separates and protects machinery and pedestrian walkways from light duty vehicular traffic effectively and inexpensively. Ideal for protecting buildings, inventory and workspaces. It is easily and quickly installed with no protruding lugs or bolts.

Finish:

For Indoor use: Powder coated yellow.
For Outdoor use: Hot Dip Galvanised and Powder coated yellow.

Specifications:

Support posts: 3mm wall thickness with black cap.

Base plate: 140 x 160 x 10mm (Drilled 4 fixing holes)


Lateral rails: 60 x 40mm with 3mm wall thickness

Under-run rail: 200 x 100 x 3 mm

Option:

Can also be supplied in our **FLEX** system (see page 37 for details).

- Indoor and Outdoor use
- Excellent build quality and strength
- Quickly and easily installed
- Modular construction for easy extension
- Highly visible

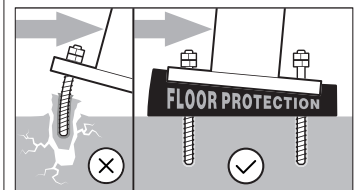

Fixings	Dimensions (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface fixing bolt S14 (4 per post)	10/100	0.2	109.17.393	1 / 2 days
Through bolt anchor (4 per post)	12/120	0.3	109.24.665	

Lateral Rails (mm) including fixing screws			
1,000	1,200	1,500	2,000
5	6	7	9
194.21.266	194.27.076	194.25.352	194.25.650
5 / 10 days			
194.29.126	194.27.265	194.27.828	194.29.847
5 / 10 days			

Dimensions (mm) H x D x WT	Under-run Guard (mm), Steel			
	800	1,080	1,380	1,880
200 x 100 x 3				
Delivery weight (kg/ea.)	9	11	13.5	17.5
Powder coated	194.20.522	194.24.463	194.23.061	194.20.550
Number of surface fixing bolts per length	4	4	5	5
Typical despatch time (working days)	5/10 days			




Collision Protection

Collision Protection



BLACK BULL HD Impact Protection Railing System



Description	Support Posts 500 x 100 x 100mm		
	End Post	Centre Post	Corner Post
			
Delivery weight (kg/ea.)	10	10.5	10.5
Powder coated	194.16.094	194.18.550	194.13.760
Typical despatch time (working days)			
Hot dip galvanised and powder coated	194.15.765	194.18.142	194.15.032
Typical despatch time (working days)			



This highly visible Heavy Duty Railing System separates and protects machinery and pedestrian walkways from fork lift and other vehicular traffic effectively both indoors and outdoors. Ideally suited for protecting buildings, equipment, machinery and workspaces from accidental damage. It is easily and quickly installed with no protruding lugs or bolts.

Surface treatment:

For Indoor use: Powder coated yellow.
For Outdoor use: Hot Dip Galvanised and Powder coated yellow.

Specifications:

Support posts: 3mm wall thickness.
Base plate: 200 x 200 x 10mm (Drilled 4 fixing holes)

Lateral rails: 120 x 80mm with 3mm wall thickness

Option:









Can also be supplied in our **FLEX** system (see page 44 for details).



- Indoor and Outdoor use
- Superior build quality and strength
- Quickly and easily installed
- Modular construction for customised applications
- Countersunk bolts secure rails to posts



Fixings	Dimensions (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface fixing bolt S12 (4 per post)	8/100	0.2	109.17.393	1 / 2 days
Through bolt anchor (4 per post)	12/120	0.3	109.24.665	

Support Posts 1,000 x 100 x 100mm			Lateral Rails (mm) included fixing screws				Bollard (mm)
End Post	Centre Post	Corner Post	1,000	1,200	1,500	2,000	1,000 x 100 x 100
							
17	18	18	9.5	11.5	14	18	16
194.14.244	194.17.026	194.18.205	194.18.997	194.16.172	194.15.942	194.13.434	194.15.516
1 / 2 days							5 / 10 days
194.13.501	194.13.894	194.15.572	194.16.672	194.14.863	194.16.449	194.13.826	194.13.700
5 / 10 days							5 / 10 days

Collision Protection

Collision Protection



- Indoor and Outdoor use
- UV resistant Polyurethane
- Deflects up to 10 degrees
- Quickly and easily installed
- Can be fitted retrospectively

BLACK BULL FLEX Impact Protection System



A unique and patented shock absorbing feature which is incorporated into the upright posts of the Railing Systems. This is achieved by the addition of a polyurethane pad which is UV, weather and temperature resistant. The pad enables the Guard Rails to deflect up to 10 degrees. This enables the railing system to absorb shocks and impacts whilst damage is reduced significantly and still protects pedestrians, machinery etc.



Reduces repairs and damage to floors.

Full information on posts and lateral rails can be found on pages 42–43.

Maximum inclination:

Post height 540mm = 90mm deviation from vertical.
 Post height 1,040mm = 175mm deviation from vertical.

Installed using 4 chemi-anchors per post.

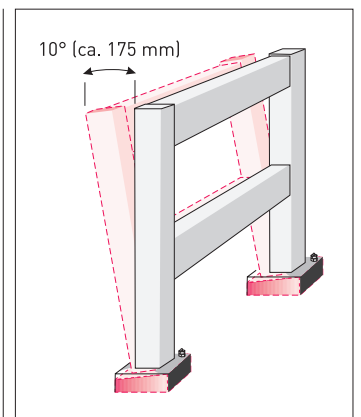

Shock absorbing pad			
Dimension (mm) H x D x W	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
50 x 206 x 206	0,6	422.21.456	5/10 days

Chemical anchor set (Set of 8)			
Dimension (mm) H x D x W	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
10/170	2,0	109.20.858	1/2 days



- Indoor and Outdoor use
- UV resistant Polyurethane
- Deflects up to 10 degrees
- Quickly and easily installed
- Can be fitted retrospectively



BLACK BULL Railing Gate – Manual or Self-closing styles.

The **BLACK BULL Railing Gate** has been designed specifically for use with our MD and HD Railing Systems being identical for both systems with the exception of the fittings. The manual style gates are designed to fix to End Posts, Centre Posts or Corner Posts. The newly introduced self-closing gate has its own specifically designed installation post (see table).

Both styles can be hung either on the left-hand side or the right-hand side and can be opened up to 90° either inwards or outwards. This range of options ensures that the **BLACK BULL Railing Gate** range is even more versatile and will suit most applications.


Manufactured from high quality steel with a welded protective panel for additional strength, better visibility and to which a warning sign can be attached if required. (Sign not supplied).

Two styles:

- For manual opening and closing. No need for special posts – gate fits all posts.
- **NEW:** Gas-spring powered self-closing action. Requires separate installation post (see table).

Specification:

Gate size:	835 x 475mm
O/all size:	905 x 520mm
Frame profile:	60 x 30mm
Wall thickness:	2mm
Protective panel:	250 x 355mm
Finish:	Powder coated
Colour:	Yellow:

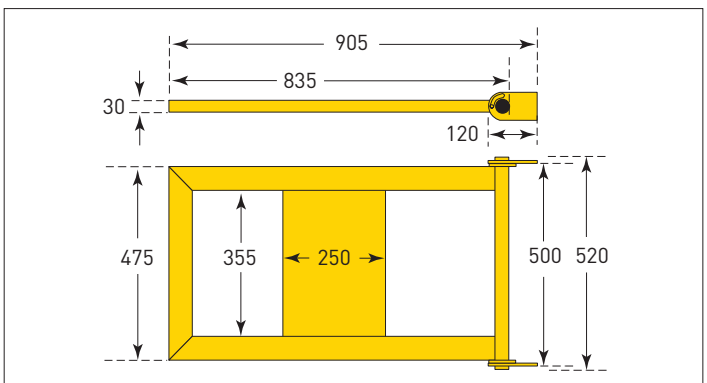

Gate	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
HD – Manual	12	194.29.743	5/10 days
MD – Manual		194.20.653	
HD – Self closing	30	194.26.359	5/10 days
MD – Self closing		194.28.624	






Collision Protection



Collision Protection



BLACK BULL FLEX Impact Protection System Hybrid



Description	Support Posts, Steel 1,040 x 100 x 100mm		
	End Post	Centre Post	Corner Post
			
Delivery weight (kg/ea.)	14	14	14
Powder coated	203.29.934	203.20.790	203.22.221
Typical despatch time (working days)	5 / 10 days		
Hot dip galvanised and powder coated	203.22.248	203.28.846	203.20.486
Typical despatch time (working days)	5 / 10 days		

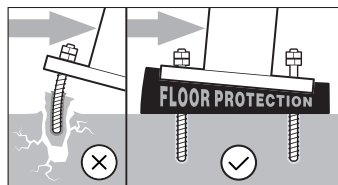




The **BLACK BULL FLEX HYBRID** System offers the best of both worlds – a practical combination of the advantages of steel and plastic.

Most plastic railings systems must have the posts secured with steel plates featuring welded studs. In short, to provide the required stability, the posts are fitted internally with steel components.

Our solution: A hybrid railing system that combines the advantages of steel with those of plastic, combining yielding steel posts with equally yielding PP plastic lateral rails.

The posts are equipped with our patented PU pads which allow the posts to deflect to a maximum angle of 10°



(approx. 17.5cm), and which reduce the forces that are transmitted through the post to the floor. Lateral rails are manufactured from a tough grade of Polypropylene (PP) which is highly resistant to impact stresses. The whole assembly protects personnel, vehicles and property and reduces the incidence of repair costs to floors.

The above factors result in an eye catching black and yellow heavy-duty railing system suitable for either indoor or outdoor installation.

Surface mounting only.

Specification:

Posts:

Material: Steel
 Dimensions: 1,040 x 100 x 100mm
 Wall thickness: 3mm
 Base plate: 200 x 200 x 10mm
 Finish: Internal – Powder coated
 External – Hot Dip Galvanised and Powder coated.

Colour: Black


Lateral rails:

Material: Polypropylene (PP)
 Dimensions: 74 x 52 x 5mm
 Lengths: 1,500, 2,000 and 2,300mm




Colour: Yellow

Installed using 4 chemi-anchors per post.

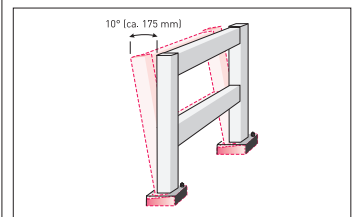


- For Indoor and Outdoor use
- Steel and Plastic construction
- Superior heavy-duty design
- Modular construction for customised applications
- Quick and easy installation



Option: Steel under-run protection bar 76mm Ø x 86mm high. Base plates 130 x 70 x 40mm. Colour yellow.

Description	Lateral Rails, Polypropylene (mm)		
	1,500	2,000	2,300
			
Delivery weight (kg/ea.)	3	3,5	4
For End and Centre posts	203.27.147	203.21.049	203.26.648
Typical despatch time (working days)	5 / 10 days		
For Corner posts 45° bevel one side	203.29.688	203.21.999	203.20.533
Typical despatch time (working days)	5 / 10 days		

Dimensions (mm) Ø x L	Fixing set		
	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
10/170	2,0	109.20.858	39,80

Description	Under-run protection bar – Steel		
	1,250mm	1,750mm	2,050mm
			
Delivery weight (kg/ea.)	10	13	16
Powder coated	203.29.159	203.21.033	203.20.865
Typical despatch time (working days)	5 / 10 days		
Hot dip galvanised and powder coated	203.24.056	203.27.061	203.29.733
Typical despatch time (working days)	5 / 10 days		
Fixing bolts per length	4	6	6

Fixing methods	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface fixing bolt S12 8/100, S. 36	0,2	109.17.393	1/2 days
Through bolt 12/120, S. 36	0,3	109.24.665	1/2 days

Collision Protection

BLACK BULL Railing Gate for hybrid railing system



Collision Protection

The BLACK BULL Railing Gate has been designed specifically for use with the BLACK BULL Hybrid Railing System. Manufactured in high quality steel, the gate can be installed to hang either left-hand or right-hand side, and the unique hinge feature allows it to be opened either inwards or outwards up to 90°. It also features a welded panel for extra strength, better visibility, and can be used to feature a warning sign if required. (sign not supplied).

A gas cylinder provides the power for the self-closing function.

- For indoor installation only
- High quality steel construction
- Self-closing operation
- Warning sign panel

Specification:

Gate size: 835 x 475mm
 O/all Size: 905 x 520mm
 Frame profile: 60 x 30mm
 Wall Thickness: 2mm
 Protective panel: 250 x 355mm
 Finish: Powder coated
 Colour: Gate Yellow
 Post Black



Gate	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Self-closing. Installation post.	30	203.29.398	5/10 days

TRAFFIC-LINE Pallet Racking Protectors Plastic



Impact Protection for pallet racking uprights manufactured from high quality polyethylene. Easily and quickly secured by two Velcro straps – no drilling into the floor required.



- For racking uprights 60 to 85mm and 86 to 120mm.
- Fixing by Velcro tape.
- Protects floor from damage.
- Recyclable.

- Flexible cushioning
- Dimensionally stable
- Installed without tools
- TUV approved
- Meets requirements of DIN EN 15512

Dimensions(mm) 550 x 126 x 104 and 550 x 150 x 120.

Note:

According to DGUV Rule 108-007 (formerly BGR 234) plastic impact protection products associated with pallet racking uprights should not be used on corners or passageways. In this situation it is recommended to use steel protection bolted to the floor.



For racking upright dimensions	Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
60-85 mm	550 x 126 x 104	1	197.29.201	1 / 2 days
86-120 mm	550 x 150 x 120	1,5	197.22.285	5/10 days



- For Indoor use
- High quality steel
- Virtually indestructible
- Differing heights



BLACK BULL Pallet Racking Protectors Steel



Pallet racking protectors are required for fixed racking installations where industrial trucks are used (except where they are guided by rails). **BLACK BULL** Pallet Racking Protectors provide the ideal solution in most situations. They can also be used to protect machinery, partition systems, rectangular columns etc.

Conform to standards BGR 234 and DIN 4844.

Variants:

Right-angle: Two way protection.
U-profile: Three way protection.

Surface treatment:

Powder coated yellow with black striping.

Note:

According to DIN EN 15512 the minimum required height of pallet racking protectors is 400mm.



Description	Fixing bolts required per protector	Dimensions (mm) Height x W x Wall	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Right-angle 400	4	400 x 160 x 5	8	197.15.928	1 / 2 days
Right-angle 800		400 x 160 x 6	9	197.13.182	
Right-angle 1,200		800 x 160 x 6	16	197.14.605	
		1.200 x 160 x 6	22	197.18.380	
U-Profile 400	6	400 x 160 x 5	10	197.28.897	5 / 10 days
U-Profile 800		400 x 160 x 6	11	197.18.365	
U-Profile 1,200		800 x 160 x 6	20	197.28.189	
		1.200 x 160 x 6	26	197.88.004	
Surface fixing bolt S14			0,2	109.17.393	1 / 2 days
Through bolt			0,3	109.24.665	

Collision Protection

Collision Protection



- For indoor use
- Protects the floor
- Heavy-duty barrier
- High energy absorption

Easily installed:

Position and align the collision pallet racking protector together with the 30 mm high energy absorption element (total height 430 mm), and bolt them to the floor using chemical fixing kit ref 109.20.858

Surface treatment:

Powder coated yellow with black striping

Upgrading options:



Already installed **BLACK BULL** right angle pallet racking protectors can be upgraded with PU elements; requires new anchoring with chemical fixing kit 109.20.858

BLACK BULL FLEX Pallet Racking Protector




Extremely sturdy, high-impact pallet racking protectors manufactured in high quality steel, equipped with energy absorption element moulded in polyurethane. The strong PU element with lateral protective edges absorbs impacts and protects the floor from damage. The black energy absorption PU element is UV-resistant and permanently elastic. Uses include logistics depots, warehouses, manufacturing units etc.

- Minimises damage from collision
- Absorption pad UV-resistant and permanently elastic
- Yields up to 45 mm approx.
- Yield angle: 6.5°

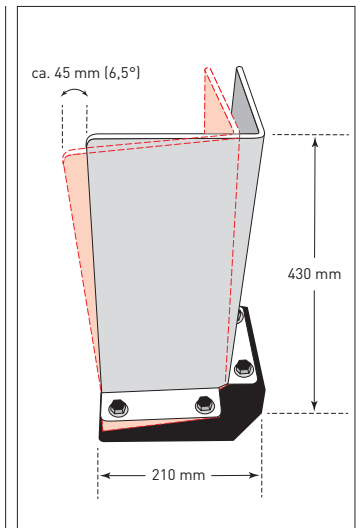

Description	Fixing bolts required per protector	Dimensions (mm) Height x W	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Right-angle 400	4	400 x 160 x 5 (H x W x WT)	8	197.15.928	1/2 days
PU shock absorbent pad		210 x 210 x 30 (W X D X H)	0,5	422.29.081	



Fixing set			
Dimensions (mm) Ø x L	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
10/170	2	109.20.858	1/2 days

BLACK BULL Pallet Racking Protectors – with Guide Rollers



Pallet racking protectors which include rollers to facilitate pallet placement to and from floor level locations. The incorporation of rollers helps to dampen shock and vibration which can occur when pallets are being located. They are most suitable for use in warehouses, distribution depots, manufacturing units etc.

Specifications:

Material: Steel

Roller material: Polyamid

Roller Dimensions:

110mm High

75mm from bottom edge of roller to floor.

Variants:

Right-angle and 'U' profiles.

Finish:

Indoor use: Powder coated yellow with black stripes.

- For Indoor use
- Highly visible colours
- Easily installed
- Virtually indestructible
- Guide roller(s) incorporated



Description	Dimensions (mm) Height/Width/Gauge	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Right-angle Fixing bolt = 4	400 x 160 x 6	9	197.22.542	1 / 2 days
U-Profile Rawl bolt = 6	400 x 160 x 6	12	197.22.021	
Rawl bolt S12		0,2	109.17.393	1 / 2 days
Surface fixing bolt S12		0,3	109.24.665	

BLACK BULL Sliding Door Protection Guards



Frequently fire doors, access doors and gates are damaged or impeded by pallets, boxes etc. with obvious consequences, especially in the case of sliding fire doors. **BLACK BULL** Sliding Door Protectors provide the right level of protection to prevent such occurrences.

Manufactured from 6 and 10mm Gauge steel these protectors are immensely strong and can withstand substantial collisions, prevent expensive repairs and ensure that vital fire doors operate correctly without being impeded.

Finish:

Indoor use: Powder coated yellow.

- For Indoor use
- Strong steel protection
- Radius corners with 45° angled ends
- Ensure full operation of fire doors etc
- Highly visible yellow coating




Dimensions (mm) H x L x D	Gauge (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
150 x 800 x 100 Anchor holes = 5	6	10,5	197.24.121	5 / 10 days
	10	16	197.17.683	
150 x 1.200 x 100 Anchor holes = 7	6	14,5	197.29.576	
	10	24	197.13.775	
Surface fixing bolt S12		0,2	109.17.393	1/2 days
Through bolt anchor		0,3	109.24.665	

Collision Protection

Collision Protection



- Indoor use
- High quality steel
- Strong 'C' section rails
- Quickly and easily installed
- Adjusts to all frame widths

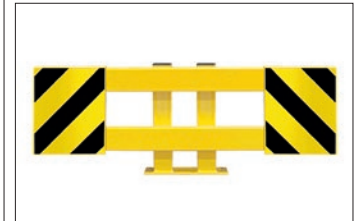

BLACK BULL Racking End Frame Protectors A Adjustable



Protect vulnerable Racking End Frames from potentially hazardous damage from forklift trucks or other vehicles.

These strong adjustable protectors are easily installed and adjusted to your particular racking widths, simply select the width combination to suit the racking width from the options listed below.

Finish:

Powder coated yellow with black striping.

Easily installed:

Bolt down support posts and clamp 'C' profile rails to posts using supplied clamps and adjust to desired width and tighten.

Attach the protective end covers (350 x 300mm) to the 'C' profile rail ends and damp to the desired position.

Dimensions (mm):

All sets:

Support posts: 465 H x 80 x 80 Square



Anchor plates: 160 D x 140 W x 10 gauge
'C' Rails: 100 D x 40 W x 3mm gauge

Set A 900


Adjustable up to 1,300mm
1 x Double post on base
2 x Rails 900mm L ('C' profile)
2 x End plates

Set A 1700

Adjustable up to 2,100mm
2 x Posts
2 x Rails 1,800mm L ('C' profile)
2 x End plates

Set A 2300

Adjustable up to 2,700mm
2 x Posts
2 x Rails ('C' profile)
2 x End plates

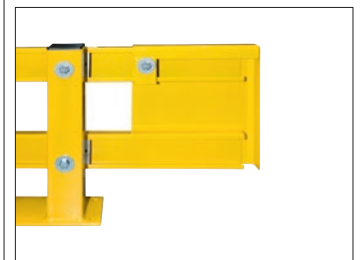

Variants	Required fixing bolts	Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Set A 900 Posts, 2 Railings, 2 End Plates	4	465 x 900 – 1.300 x 160	31	198.25.566	5 / 10 days
Set A 1.700 Posts, 2 Railings, 2 End Plates	8	465 x 1.700 – 2.100 x 160	44	198.24.401	
Set A 2.300 Posts, 2 Railings, 2 End Plates	12	465 x 2.300 – 2.700 x 160	58	198.22.991	
Surface fixing bolt S12			0,2	109.17.393	1 / 2 days
Through bolt anchor			0,3	109.24.665	



- Indoor use
- High quality steel
- Strong 'C' section rails
- Quickly and easily installed
- Adjusts to all frame widths



BLACK BULL Racking End Frame Protectors B Adjustable



Protect vulnerable Racking End Frames from potentially hazardous damage from forklift trucks or other vehicles with the **BLACK BULL** Adjustable Racking End Frame Protectors.

The end frames protect the front uprights of the end frames and permit the lateral insertion of the 'C' section rails, allowing up to 400mm adjustment.

Components in Set B:

- 2 x End frames (H x W x D)
500 x 300 x 190mm x 5mm gauge
- 2 x 'C' section rails (H x W x D)
100 x 40 x 3mm gauge
- 4 x Securing blocks

Finish:

Powder coated yellow with black striping on end frames.

Easily installed:

Assemble 'C' profile rails into slots in end frames and attach clamps (300 x 300mm), without bolting down end frames. Bolt down one end frame, adjust to desired width, bolt down second end frame and tighten clamps.

Set B 900

Adjustable from 900 to 1,300mm

Set B 1700

Adjustable from 1,700 to 2,100mm

Set B 2300

Adjustable from 2,300 to 2,700mm

Version with rollers diverts much of the forces, absorbs collisions, protects the floor and extends the life of the installation.



Variants	Required fixing bolts	Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	
Set B 900 2 Railings, 2 End Plates	12	500 x 900 – 1.300 x 190	32	198.23.925	5 / 10 days	
			39	198.22.540*		
Set B 1.700 2 Railings, 2 End Plates		43	500 x 1.700 – 2.100 x 190	50		198.25.753
		55		198.25.188*		
Set B 2.300 2 Railings, 2 End Plates		48	500 x 2.300 – 2.700 x 190	55		198.22.185
		55		198.26.651*		
Surface fixing bolt S12			0,2	109.17.393	1 / 2 days	
Through bolt anchor			0,3	109.24.665		



References marked with * are with rollers

Collision Protection



- Indoor and Outdoor use
- Adjustable to column width
- Quick and easy installation
- High quality plastics
- TUV Approved

TRAFFIC-LINE Column Protectors – Plastic



TRAFFIC-LINE Column Protectors provide effective protection of columns and pillars against costly damage caused by forklift trucks, transport vehicles, HGV's etc.

The innovative design of the **TRAFFIC-LINE Column Protector's** sliding side sections allows it to adjust to suit column sizes from 200 x 200mm to 300 x 300mm, including rectangular cross-sections (e.g. 200 x 300mm).

Moulded in modified polyethylene these are designed to withstand high impacts, whilst additionally the eye catching bright yellow ensures further protection.

These are easily and quickly installed by means of two straps (220cm long) ensuring firm fixture to the column/pillar.


Specification:

Height: 1,100mm
 Width: 450 x 450mm (min.)
 550 x 550mm (max.)
 Material: Polyethylene
 Colour: Yellow

Column Guard Extender

These HDPE moulded sections enable the standard Column Protector to accommodate columns up to 200mm x 1,000mm section. Easily fixed and secured into Column Protector using tension belts (400 cm).

Column protector	Column dimension	Outer width
Standard column protector yellow	min. 200 x 200 max. 300 x 300	min. 450 x 450 max. 550 x 550
Column guard extender black	min. 400 x 200 max. 600 x 600	min. 650 x 450 max. 850 x 850



	Height(mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Column Protector	1.100	34	206.28.690	5 / 10 days

Accessories	Dimensions (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Column Guard Extender	200 x 1.100	5	206.21.704	5 / 10 days
Lashing Strap	4.000 x 50	0,5	206.23.007	



- Indoor and Outdoor use
- High abrasion resistance
- Self-adhesive
- Temperature resistant
- Easily installed

PROline Anti-slip Tapes


PROline Anti-slip tapes are self-adhesive backed for ease of application and coated with aluminium oxide particles for long lasting abrasion resistance. Tested by the Pendulum method they achieved a dry surface result of 102 TRL and a wet surface result of 71 TRL.

Ideal for use on walkways, stairs, entrances and exits, ramps, ladders, vehicles etc.

- Self-adhesive for ease of application
- Chemical and mineral resistant
- UV stable – for indoor and outdoor use
- Temperature range -30°C to +70°C

Presentation:

Rolls of 18.3m and pre-cut blanks.



Note:

Edge sealing is necessary for damp/wet rooms and outdoor use.



Rolls				
Width (mm)	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
25	black	1.2	265.15.300	3 / 5 days
	grey		265.13.246	
	transparent		265.16.486	
	yellow		265.26.079	
50	black	2	265.13.195	
	grey		265.14.026	
	transparent		265.17.560	
	yellow		265.22.144	
	yellow-black		265.17.329	
100	black	3.5	265.13.274	
	grey		265.19.012	
	transparent		265.16.851	
	yellow		265.20.587	
	yellow-black		265.14.441	
Adhesive 150ml Tube (for one Roll)		0.5	265.18.646	

Pre-cut Blanks				
Dimensions (mm)	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
25 x 800	black	1,0	265.20.485	3 / 5 days
50 x 800		1,2	265.25.933	
150 x 610		1,5	265.28.717	

Anti-slip Tapes



- Indoor and Outdoor use
- For textured surfaces
- Easily applied
- UV Stable
- Temperature resistant



PROline Anti-slip Tapes – Conformable


PROline Conformable Anti-slip tapes readily conform to chequered and similar surfaces due to the flexible aluminium substrate which is then coated with aluminium oxide particles for maximum coefficient of grip and durability.

Easily applied due to the strong self-adhesive backing, these tapes have been tested to ASTM C 1028-96 with the following results, dry surface 1.14, wet surface 0.98.

Suitable for use on steps, slopes, ramps, Chequer & Durbar plates, fire escapes etc.

- Chemical & oil resistant
- UV Stable – suitable for outdoor use.
- Temperature range: -30°C to +160°C
- Tape length: 18.3m

For best results when applying use a soft rubber hammer or pressure roller.



Width (mm)	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
25	black	1.2	265.29.332	3/5 days
	yellow		265.25.088	
	yellow-black		265.24.261	
50	black	2	265.28.596	
	yellow		265.20.051	
	yellow-black		265.22.821	
100	black	3.5	265.27.886	
	yellow		265.20.038	
	yellow-black		265.28.229	
150	black	4.5	265.28.107	
	yellow		265.29.244	
	yellow-black		265.24.113	
Pressure roller		0.3	265.22.731	

PROline Vinyl Line Marking Tape – for forklift truck areas



PROline Vinyl Line Marking Tape is a heavy duty self-adhesive floor marking tape (1,000µ) manufactured in high grade Vinyl for use in indoor situations. This tape being extremely tough and durable is suitable for permanent installations.

PROline Vinyl Line Marking Tape has excellent adhesion properties and durability. It is suitable for use in areas driven over by pallet trucks, forklift trucks and cleaning machines in warehouses, distribution depots etc. (Whilst PROline Vinyl Line Marking Tape is very durable, operatives should avoid turning movements of wheels placed directly on the marking tape.)

- Indoor use
- Suitable for forklift areas
- Available in various colours
- 1,000µ. Vinyl film thickness
- For permanent marking

Specification:

Thickness: 1,000µ
Widths: 50mm and 75mm
Lengths: 25m



Colour	Length (m)	50 mm			75 mm		
		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
white	25	2,0	261.27.044	5/10 days	2,5	261.28.523	5/10 days
yellow			261.24.239			261.24.227	
blue			261.26.957			261.25.412	
red			261.21.702			261.29.359	
green			261.28.007			261.28.249	

PROline Steel Line Marking Tape – for forklift truck areas



This heavy duty line marking tape has been developed specifically for use in areas where forklift trucks operate. Produced in 700µ thick coloured flat steel it is particularly suitable for precision marking on smooth level internal floors.

PROline Steel Line Marking Tape has excellent adhesion properties and is very durable. It is eminently suitable for areas driven over by pallet trucks, forklift trucks and cleaning machines in warehouses, distribution depots etc. This tape has a limited resistance to turning movements of transport vehicles.

Specification:

Thickness: 700µ
Width: 75mm
Lengths: 1.5m and 6m

- Indoor use
- Produced in flat steel
- Forklift resistant
- For permanent marking



Colour	Length (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
white	1,5	1,0	261.25.551	5 / 10 days
	6	1,7	261.24.898	
yellow	1,5	1,0	261.22.021	
	6	1,7	261.27.500	

Line Marking Systems



- Indoor use
- Extra strong
- Leaves no residue when removed from most surfaces
- Ideal for short and medium term marking

ASR A1.3

The marking of walkways/traffic routes

"The marking of walkway/traffic route boundaries is coloured and clearly recognizable. If the marking is applied to the floor this can be achieved, for example, by lines at least 5cm wide in a clearly visible colour - preferably white or yellow - with sufficient contrast to the colour of the floor area."

PROline-tape Floor Marking System

Self-adhesive floor marking tape

PROline-tape is an extremely tough floor marking tape manufactured in high quality vinyl for quick and effective marking of internal surfaces. Aisles, traffic ways and other demarcation areas can be identified precisely, cleanly and economically.

Specification:


Length: 33m
Widths: 50 and 75mm
Thickness: 0.15mm
Core: 75mm ID

PROline-tape is easily and quickly applied with the **TAPEliner** applicator, and we also offer the **PROline-tape Marking Set** which contains all the necessary components for a quick start (see opposite page).

Colour	Indication
White	General marking
Yellow	Hazard/caution
Red	Danger/prohibition
Blue	Mandatory protection
Green	Information/direction
Orange	Chemical storage
Red/White	Fire equipment
Green/White	Information/direction
Black/yellow	Hazard/caution

See page opposite for details.





Colour		PROline-tape, 50mm			PROline-tape, 75mm		
		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	white	1,0	261.16.606	1 / 2 days	1,2	261.16.619	1 / 2 days
	yellow		261.13.796			261.18.798	
	blue		261.19.771			261.15.989	
	red		261.13.752			261.18.675	
	green		261.18.249			261.16.655	
	orange		261.16.322			261.17.531	
	red/white		261.18.826			261.15.954	
	yellow/black		261.17.941			261.13.438	
	green/white		261.17.310			261.19.066	

PROline-tape Marking System

Consisting of:

- 1 **TAPEliner**
- 2 Rolls **PROline-tape**
- 1 Trimming Knife
- 1 Marker Line and Chalk



Colour		PROline-tape, Marking Set 50mm			PROline-tape, Marking Set 75mm		
		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	white	11,5	261.15.202	1 / 2 days	12	261.19.212	1 / 2 days
	yellow		261.17.297			261.18.900	
	blue		261.14.977			261.16.487	
	red		261.15.660			261.16.560	
	green		261.19.541			261.17.656	
	orange		261.17.130			261.13.748	



TAPEliner	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Marker with Trimming Knife	10	261.16.528	1 / 2 days

Line Marking Systems



- For Indoor and Outdoor use
- Highly visible and fast drying
- Abrasion and chemical resistant
- Easy to use

PROline-paint Marking Systems

PROline-paint is developed for rapid and effortless marking of indoor and outdoor areas. It is long-lasting, durable and cost effective.

PROline-paint is highly visible, abrasion and chemical resistant. The paint will adhere to virtually any dry, clean, dust and oil free surface e.g. concrete, asphalt, tarmac, metal, tiles etc.

It is fast drying – normally in minutes from application. **PROline-paint** is economical in use, a 750ml can will produce a line 50mm wide between 50-90 metres long (dependant on type of surface). It is environmentally safe and conforms to the latest EU regulations.

Applicators:

The applicators feature minimal assembly and are safe and easy to use – simply shake the can – insert – mark line – done! To mark close to walls, racking etc. just remove the rear wheels.

TIP:

See comments in ASR A1.3 on page 58.

PROliner

Uses one 750ml can of **PROline-paint** for rapid line marking – up to 25 metres per minute. The applicator is easily adjusted to produce lines between 50 and 75mm wide. Colours can be changed without having to clean applicator.

ROADliner

All the benefits as the **PROliner**, except that it uses two cans of **PROline-paint** to produce lines between 100 and 130mm wide.

HANDliner

Specially designed for use in hand marking, use with stencils and to highlight obstructions, steps etc. Use with a single can of **PROline-paint**.

See page opposite for details.

Colour

White
Yellow
Red
Blue
Green
Orange

Indication

General marking
Hazard/caution
Danger/prohibition
Mandatory protection
Information/direction
Chemical storage



Application tip:

When marking synthetic floors or floors treated with synthetic sealants, we recommend you test compatibility, drying time and adhesion, before commencing project.





Colour – 750 ml/Dose			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	white	~ RAL 9016	1,5	260.11.745	1 / 2 days
	yellow	~ RAL 1023		260.11.089	
	orange	~ RAL 2009		260.17.886	
	red	~ RAL 3020		260.12.976	
	green	~ RAL 6024		260.11.015	
	blue	~ RAL 5017		260.12.531	
	grey	~ RAL 7042		260.11.057	
	black	~ RAL 9017		260.11.954	



PROline-paint Applicators	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
PROliner For 50mm to 75mm lines	5	260.10.174	1 / 2 days
ROADliner For 100mm to 130mm lines	7	260.10.383	
HANDliner For hand use	1,5	260.10.437	



PROline-paint Marking System	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
PROline-paint Marking Set – WHITE 1 PROliner Applicator 50mm to 75mm lines 2 Cans of PROline Paint 1 PROline-Marker Line and Chalk	8	260.11.610	1 / 2 days
PROline-paint Marking Set – YELLOW 1 PROliner Applicator 50mm to 75mm lines 2 Cans of PROline Paint 1 PROline-Marker Line and Chalk		260.10.795	



PROline-paint Stencil Sets	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
15cm Stencils of Letters and Symbols	1,5	260.10.503	5 / 10 days
30cm Stencils of Letters and Symbols	2	260.11.149	



PROline-paint Accessories	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
PROline-paint Chalk Marker Line: (Provides an accurate guide line)	1	260.11.401	1 / 2 days
Chalk Refill (for Chalk Marker Line)	0,5	260.11.117	

Floor and Aisle Marking Paint



- For Indoor use
- Fast drying with excellent covering properties
- Wear resistant and durable
- Abrasion and chemical resistant
- Easy to use – no mixing of components



PROline-paint Indoor Industrial Floor Coating


PROline-paint is an extremely tough and durable single-component synthetic resin based paint for interior use on highly trafficked industrial, showroom and warehouse floors. It can be applied to concrete, asphalt, pavements, screed, paving and porous tiles by roller (for larger areas), brush or by spray.







- Tough and fast drying.
- Dirt repellent, easy to clean.
- No mixing of components.
- Highly resistant to oils, solvents and detergents.
- Suitable for use with forklift trucks.

Coverage:
5 litre container will cover about 20 to 25m².

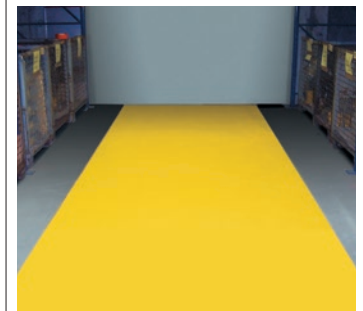PROline-paint
Industrial Floor Coating is:

Tip:
For coated surfaces (e.g. epoxy resin floors) we recommend you carry out a compatibility test to determine drying time and adhesion of paint.



Colour			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	white	~ RAL 9016	7	263.13.824	1 / 2 days
	yellow	~ RAL 1003		263.14.807	
	red	~ RAL 3001		263.18.881	
	blue	~ RAL 5017		263.19.179	
	silver grey	~ RAL 7001		263.13.740	
	stone grey	~ RAL 7030		263.14.968	



- For Indoor use
- Fast drying with excellent covering properties
- Wear resistant and durable
- Resists abrasion and most chemicals
- Suitable for use in forklift areas
- Easy to use – no mixing of components



Floor marking and Repair


PROline-paint Anti-slip Industrial Floor Coating

PROline-paint Anti-slip Industrial Floor Coating is an extremely tough and durable single-component synthetic resin based paint for interior application with the same properties as **PROline-paint** Industrial Floor Paint but with the addition of fine quartz granules to provide a Non-slip surface to classification R10 (DIN51130: 2004).

Ideal for use on heavily trafficked areas, **PROline-paint** is easily applied using a brush or roller. It is suitable for applying to concrete, asphalt and paved surfaces.

Coverage:
5 litre container will cover about 20m².

Tip:
For coated surfaces (e.g. epoxy resin floors) we recommend you carry out a compatibility test to determine drying time and adhesion of paint.



Colour		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	white	~ RAL 9016	263.23.941	1 / 2 days
	yellow	~ RAL 1003	263.24.370	
	blue	~ RAL 5017	263.25.507	
	silver grey	~ RAL 7001	263.26.072	
	stone grey	~ RAL 7030	263.24.599	

Floor and Aisle Marking Paint

Floor marking and Repair



- For Outdoor use
- Fast drying with excellent covering properties
- Wear resistant and durable
- Highly abrasion resistant
- Easy to use – no mixing of components



PROline-paint Outdoor Industrial Floor Coating






PROline-paint Outdoor Industrial Floor Coating is a most extremely tough and durable single-component paint, especially suitable for use outdoors.

PROline-paint is suitable for applying to concrete, screed, asphalt and composite stone surfaces.

Easy to apply with either by roller (for large areas), brush or spray, it is fast drying giving excellent coverage and adhesion. It has good resistance against abrasion wear and most oils.

Coverage:
5 litre container will cover about 25m².



Colours			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	white	~ RAL 9016	7	263.22.420	1 / 2 days
	yellow	~ RAL 1023		263.25.624	
	red	~ RAL 3020		263.23.804	
	blue	~ RAL 5017		263.21.512	
	grey	~ RAL 7043		263.25.110	

PROline Floor Signs



PROline Floor Signs are designed to give clear, concise instruction and warnings to your workforce. Good signage in the workplace reduces accidents and provides visual reminders to staff, such as the wearing of Hi-Viz vests, eye protection etc.

Manufactured in a high quality, slip resistant vinyl, **PROline Floor Signs** are extremely durable.

Each sign has a self-adhesive backing, making application a quick and hassle free operation.

Suitable for installation on floors, walls and any sealed surface. Prior to installation ensure the surface is clean and grease free. Peel the backing paper off the back of the sign and place in position, apply pressure from the centre out to the edge to expel any air bubbles.

PROline Floor Signs are suitable for use in warehouses, factories, distribution centres, construction sites, shopping centres etc.


Specification:
430mm diameter

- Under-film printed for greater scuff protection.
- Strong vinyl substrate with aggressive permanent self-adhesive backing.
- Suitable for application to smooth clean surfaces.
- Slip resistant surface.
- Clear safety, warning and instructional messages.
- Quickly and Easily applied.
- Highly visible.



See over for full range.

PROline Floor Markers

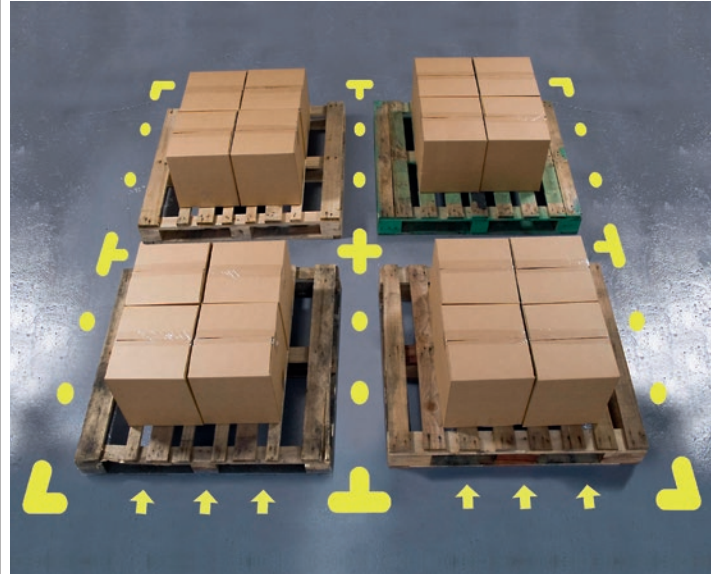

Floor marking and Repair

PROline Floor Markers provide clear and highly visible demarcation for pallet locations in warehouses and distribution centres.

Manufactured in a high quality PVC, **PROline Floor Markers** are extremely durable.

Each marker has a self-adhesive backing, making application a quick and hassle free operation.


Suitable for installation on floors and walls. Prior to installation ensure the surface is clean and grease free. Peel the backing paper off the back of the marker and place in position, apply pressure from the centre out to the edge to expel any air bubbles.

PROline Floor Markers are suitable for use in warehouses, factories, distribution centres, etc.

Specification:

- 'X' - 300mm x 300mm
- 'T' - 300mm x 200mm
- 'L' - 200mm x 200mm
- Disk - 90mm
- Arrow - 90mm

- Semi rigid vinyl film with aggressive permanent self-adhesive backing.
- Highlight forklift routes, pallet positions and walkways for efficient warehouse operation.
- Quickly and Easily applied.
- Suitable for application to smooth clean surfaces.
- Highly visible.
- Supplied in Packs of 10.

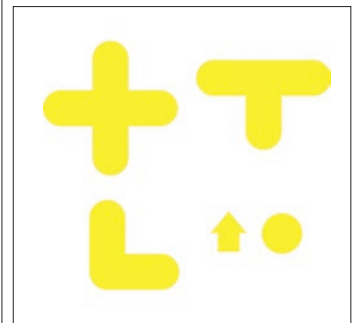

See over for full range.






	Typical despatch time (working days)
PROline Floor Signs	1 / 2 days

	Typical despatch time (working days)
PROline Floor Markers	1 / 2 days

PROline Floor Signs

 549.10.105	 549.10.109	 549.10.113	 549.10.119
 549.10.125	 549.10.129	 549.10.132	 549.10.135
 549.10.138	 549.10.142	 549.10.146	 549.10.149
 549.10.152	 549.10.156	 549.10.158	 549.10.162
 549.10.164	 549.10.167	 549.10.170	 549.10.172
 549.10.175	 549.10.177	 549.10.181	 549.10.185
 549.10.188	 549.10.191	 549.10.196	 265.22.731

PROline Floor Markers

 549.20.104	 549.20.108	 549.20.112	 549.20.116
 549.20.119			



- Quick and easy installation
- Highlight hazardous feature
- Marking according to DIN 4844
- Available in 3 formats to suit most conditions
- Permanent adhesive

H & S Statement:
Health & Safety Regulations state that permanent obstructions or danger zones should be marked yellow and black, and that temporary obstructions should be marked in red and white.

Floor marking and Repair

Hazard Warning Tape Self-adhesive

Accidents often occur when hazards are not clearly marked. Our range of Hazard Warning tapes provides the ideal solution for most common situations. Quick and easy to install our self-adhesive tapes adhere to smooth, dust and grease free surfaces and can be removed without leaving a residue from most surfaces.



Non-reflective Hazard Warning Tape

Quickly and easily applied this low cost self-adhesive hazard warning tape is ideal for highlighting indoor hazards in most daylight and artificial light conditions.



Reflective Hazard Warning Tape

This high quality, UV resistant and long lasting tape provides excellent visual warning both indoors and outdoors of hazards in a wide range of lighting conditions.



Luminescent Hazard Warning Tapes

An extremely high quality Hazard Warning Tape which has a long lasting luminous effect in all light conditions and especially in difficult situations such as darkness and smoke.

Description	Size (mm x m)	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Non reflecting Roll –right-hand direction	60 mm x 66 m	red/white	0,5	420.11.054	1 / 2 days
		black/yellow		420.11.965	
Retro reflecting 2 roll pack (1 right-hand-, 1 left-hand direction)	50 mm x 25 m	red/white	1	420.11.114	5 / 10 days
		black/yellow		420.12.062	
Long lasting Luminous effect 2 roll pack (1 right-hand-, 1 left-hand direction)	50 mm x 16 m	red/lux-white	0,5	420.18.167	
	100 mm x 16 m		1	420.19.444	
	50 mm x 16 m	black/lux-white	0,5	420.13.232	
	100 mm x 16 m		1	420.16.818	
Long lasting Luminous effect 1 roll	25 mm x 25 m	single colour luminous (lux-white)	0,2	420.18.600	
	50 mm x 25 m		0,4	420.15.285	

RESTORE – Surface Repair Kit



RESTORE is a cold process repair kit for three different surface types: Concrete, asphalt and screed.

An extremely durable two-component compound with excellent load strength properties. Fast acting bonding agent guarantees short curing times. Easy to spread for quick repair of cracks, holes, and uneven surfaces in driveways, pavements, car-parks etc. Also suitable for the construction of ramps etc.

Specification:

Colour: Dark grey RAL7021

Coverage: 9kg per m²
(at layer thickness of 6mm)

Pack: 20kg Container
(5kg bonding agent and
15kg quartz sand (activator))

- Easy to handle and apply
- Extremely durable and resistant to wear
- Fast setting – can be driven over within 20-30 minutes (at 20°C)



Pack 20kg Container	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
5kg bonding agent 15kg quartz sand (activator)	20	266.27.978	5 / 10 days

RESTORE – Joint Repair Kit



RESTORE Joint Repair is an extremely strong and durable two-component mixture with fast reactive binders for short curing times.

For fast, permanent repairs to cracks and holes in concrete, asphalt, pavements.

RESTORE remains permanently flexible and is thus particularly suitable for heavy-duty floors, reducing the risk of further cracks due to stress.

Can be driven over after 60 minutes at 20°C.

Specification:

Colour: Dark grey RAL 7021

Coverage: 1kg per m² in joint of
20 x 50 x 1,000mm

Pack: 5kg flexible resin
0.2kg Hardening agent

- For Indoor and Outdoor use
- Self-levelling
- Durable and long lasting
- Mechanically stable
- UV and weather resistant
- Solvent free
- Permanently flexible




Note:

Joint width: at least 5mm



Pack 5.2kg Container	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
5kg flexible resin 0.2kg hardening agent	6	266.20.698	5 / 10 days




- Easily cut to length with a sharp knife
- For Indoor and Outdoor use
- Temperature resistant from -40°C to +90°C
- Fire resistant to UL94

Easily applied to all smooth, clean, dust-free and de-greased surfaces. Manufactured from high quality, UV and age resistant flexible Polyurethane (PU) foam.

Finish:

Length: 5 metres.
Colour: yellow/black EN 4844

9 profiles available – other profiles on request.

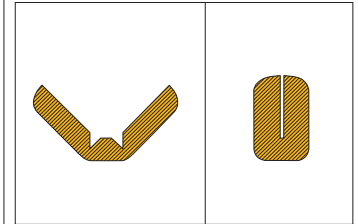

Variable edge protection profile for angles up to 160° (Self adhesive).

TRAFFIC-LINE Impact Protection – 5 metres

TRAFFIC-LINE Impact Protection in 5 metre lengths is ideal for longer installation runs, and provides excellent warning and protection to personnel and property.

Note:


For longer runs we recommend 5 metre rolls, for shorter applications we recommend 1 metre lengths – see pages 70-71.



Profile	Edge Protection Angle 26/14	Surface Protection Semi-Circular 40/32	Surface Protection Rectangle 50/20	Surface Protection Rectangle 40/11	Edge protection Right-Angle 26/26
Fixing:	self adhesive				
Delivery weight (kg/ea.)	2,2	2,5	2,7	2,4	2,2
Reference	422.28.508	422.29.052	422.29.669	422.27.694	422.26.236
Typical despatch time (working days)	1 / 2 days				

Profile	Edge protection Right-Angle 47/47	Edge protection Semi-Circular 40/40	Profile protection Semi-Circular 40/40/8	Profile protection Rectangle 25/30/8
Fixing:	self adhesive		push on	
Delivery weight (kg/ea.)	2,7	2,3	2,4	2,2
Reference	422.22.011	422.24.291	422.23.704	422.29.978
Typical despatch time (working days)	1 / 2 days			

Impact Protection

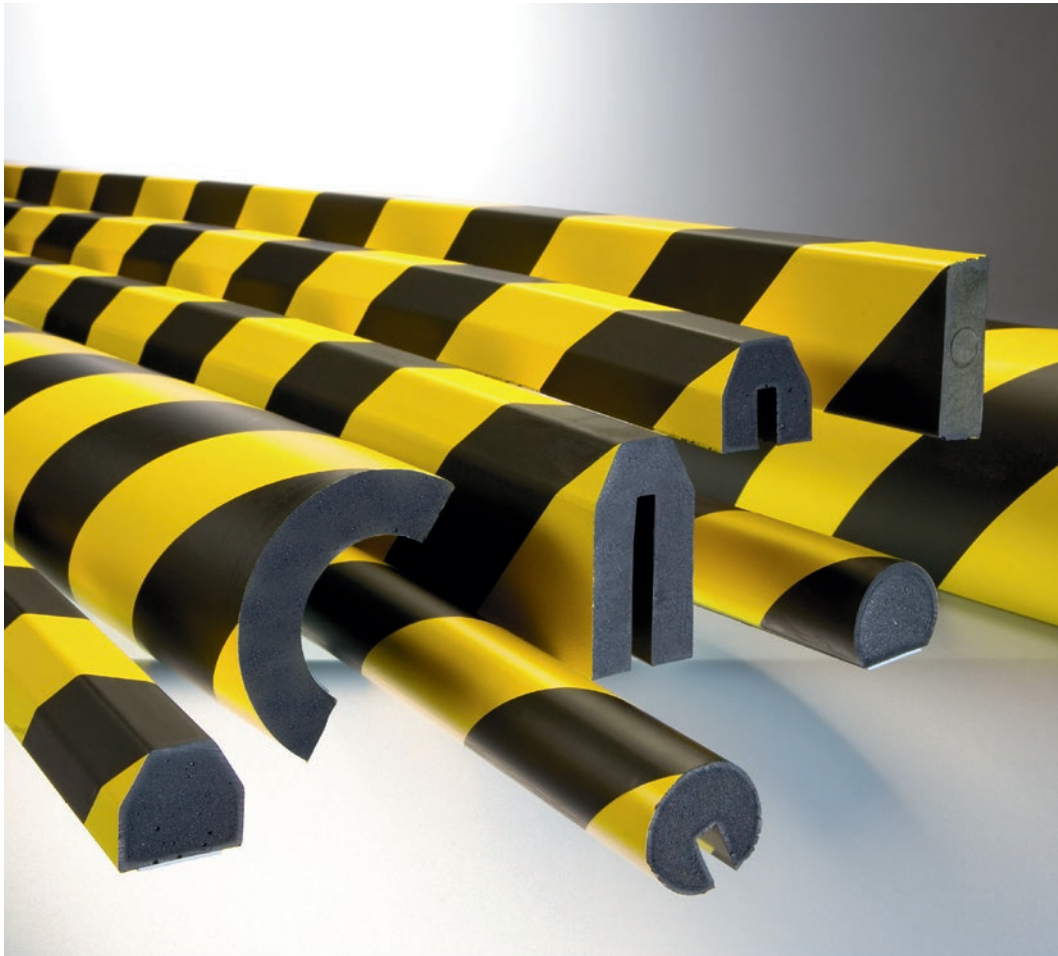

- For Indoor and Outdoor use
- High quality PU foam
- Absorbs impacts while retaining shape
- Resistant to UV light and solvents
- Temperature resistant



Warning and Protection Profiles

TRAFFIC-LINE Impact Protection

TRAFFIC-LINE Impact Protection profiles are most effective in providing both visual warning and safety cushioning of hard and unyielding objects. They are manufactured from Polyurethane (PU) foam which is flexible and age resistant, the self-adhesive backing adheres to dry, smooth, clean dust free and degreased surfaces permanently. In addition to the above qualities Impact Protection features the following advantages:

- Quick and easy installation
- UV and solvent resistant
- CFC and Silicone free
- Temperature resistant from -40°C to +90°C
- Fire resistant to UL 94
- Completely non-porous (uncut)
- Use Indoors and Outdoors
- Easily handled 1,000m lengths
- Easy to cut to length with a sharp knife or fine toothed saw

TRAFFIC-LINE Impact Protection profiles are used in areas of internal and external machinery, racking, conveyors,

vehicles, mobile trolleys, corners, columns, girders, production areas, hospitals, laboratories, etc. and in many other applications where personnel or property requires protection.

Length: 1,000mm

Standard Marking: yellow/black (according to DIN 4844).







Note: Other colours available on request (e.g. Red/white or solid black).






Note: Use 1 metre lengths for small to medium installations, for longer installations use 5 metre lengths (see page 69).












TIP:








For extreme load conditions fixing can be reinforced with standard PU adhesive.

Surface Protection	Trapeze 40/40	Semi-Circular 40/32	Rectangle 60/20	Rectangle 60/20 3 pre-drilled holes	Rectangle 200/20 4 pre-drilled holes
Fixing:	Self-adhesive fix			Screw fix	
					
Delivery weight (kg/ea.)	0.7	0.7	0.7	0.7	1.2
Reference	422.18.441	422.13.249	422.19.912	422.19.509	422.15.592
Typical despatch time (working days)	1 / 2 days				

Edge Protection	Trapeze 40/40	Right-Angle 30/30	Right-Angle 60/60	Semi-Circular 40/40
Fixing:	Self-adhesive fix			
				
Delivery weight (kg/ea.)	0.7	0.5	0.8	0.7
Reference	422.14.275	422.17.559	422.18.566	422.19.099
Typical despatch time (working days)	1 / 2 days			

Profile Protection	Trapeze 40/40/8	Trapeze 40/80/8	Semi-Circular 40/40/8	Rectangle 25/30/8
Fixing:	Push-fit fix			
				
Delivery weight (kg/ea.)	0.7	0.7	0.7	0.7
Reference	422.13.264	422.15.601	422.17.696	422.26.168
Typical despatch time (working days)	1 / 2 days			

Pipe Protection	Curvature: 40 (for pipes 30-50mm Ø)	Curvature: 60 (for pipes 50-70mm Ø)	Curvature: 85 (for pipes 70-100mm Ø)
Fixing:	Self-adhesive fix		
			
Delivery weight (kg/ea.)	1	2	2.5
Reference	422.16.740	422.17.049	422.17.488
Typical despatch time (working days)	1 / 2 days		

Edge Protection Accessories-Black	TRAPEZE – Edge length 80mm			SEMI-CIRCULAR – Edge length 45mm		
	External tri-corners	External corners	Internal corners	External tri-corners	External corners	Internal corners
Fixing:	self adhesive					
						
Delivery weight (kg/ea.)	0.2	0.2	0.2	0.2	0.2	0.2
Reference	422.18.641	422.16.525	422.18.012	422.19.578	422.18.356	422.17.839
Typical despatch time (working days)	1 / 2 days					

Impact Protection



- For Indoor use
- Yellow/black to DIN 4844
- UV and solvent resistant
- Temperature resistant
- Easily cut to size on site (sharp knife or fine saw blade)

TRAFFIC-LINE Impact Protection - Magnetic

An innovative development of our PU foam Impact Protection profiles, the magnetic strips are an integral part of the profile which are easily attached to steel surfaces. A simple solution for applications that do not require permanent protection or areas that require regular thorough cleaning. Manufactured in a high quality, age

resistant, flexible Polyurethane (PU) foam.

- UV and solvent resistant
- Silicone free
- For Indoor use*
- Temperature resistant from -40°C to +90°C
- Fire resistant to UL94

***OPTION:** For outdoor use the ends are additionally sealed (Additional cost).

Finish:

Length: 1,000mm
Colour: Yellow/black

Most profiles can be supplied with magnetic strips.



Magnetic	Edge protection Trapeze 40/40	Edge protection Right-Angle 30/30	Edge protection Right-Angle 60/60	Edge protection Semi-Circular 40/40	Pipe protection Curvature 40
Delivery weight (kg/ea.)	0,7	0,5	0,8	0,7	1
Reference	422.23.243	422.24.979	422.25.253	422.20.276	422.21.293
Typical despatch time (working days)	1 / 2 days				

Magnetic	Pipe protection Curvature 60	Pipe protection Curvature 85	Surface protection Trapeze 40/40	Surface protection Semi-circular 40/32	Surface protection Rectangle 60/20
Delivery weight (kg/ea.)	2	2,5	0,7	0,7	0,7
Reference	422.22.247	422.20.581	422.26.582	422.27.977	422.20.678
Typical despatch time (working days)	1 / 2 days				



- Indoor and Outdoor use
- White colour
- UV and solvent resistant
- Temperature resistant
- Silicone free
- Easily cut to size on site (sharp knife or fine saw blade)



TRAFFIC-LINE Impact Protection - White

Where discreet protection is required we have developed **TRAFFIC-LINE** Impact Protection in pure white colour. Manufactured in flexible and anti-aging Polyurethane (PU) foam with a non-porous skin **TRAFFIC-LINE** Impact protection is highly suitable for

applications in hospitals, laboratories, food-processing industry, offices, clean rooms etc.

- Non-porous surfaces
- Temperature resistant from -40°C to +90°C

- Fire classification to UL94
- Indoor and Outdoor use

Finish:

Length: 1,000mm
Colour: White

White	Profile protection Semi-Circular 40/40/8	Edge protection Right-Angle 30/30	Edge protection Semi-Circular 40/40	Surface protection Semi-circular 40/32
Fixing:	push on	self adhesive		
Delivery weight (kg/ea.)	0,7	0,5	0,7	0,7
Reference	422.18.250	422.15.712	422.15.039	422.18.541
Typical despatch time (working days)	1 / 2 days			

White	Surface protection Rectangle 60/20	External tri-corners	External corners
Fixing:	self adhesive		
Delivery weight (kg/ea.)	0,7	0,2	0,2
Reference	422.18.163	422.14.008	422.17.487
Typical despatch time (working days)	1 / 2 days		

Available in 7 profiles (5 standard and 2 external corner elements) – other profiles available on request).



Impact Protection



- Indoor use
- Extremely shock and impact resistant
- Mould and cold resistant
- Fire protection class B2
- Resistant to detergents
- Easily installed



TRAFFIC-LINE Wall Buffer



Tough impact resistant Polyethylene profiles designed to protect walls against impacts and glancing blows. Ideally suited for installation in rooms and corridors of public buildings, nursing homes, waiting rooms, hospitals and clinics, industrial buildings, offices etc.

TRAFFIC-LINE Wall Buffers are mould resistant and are temperature resistant down to -30°C , and are easy to maintain and clean. They are manufactured in solid colour throughout the profile, thus reducing the visual effect of any impacts.

The profiles are easily installed with 6mm countersunk screws (not supplied) through pre-drilled countersunk holes, which can be covered with the identical coloured plugs supplied. They are easily cut to length or mitred on site using standard tools.

Fire Protection Class: B2
Length: 2,060mm

Other thicknesses, heights, profiles and colours available on request.

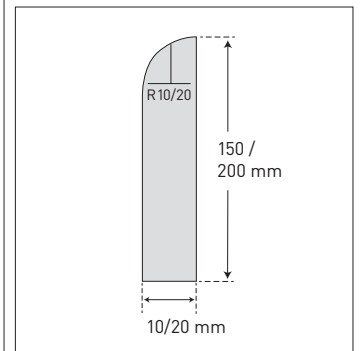

Colour	Height (mm)	Thickness (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
white	150	10	3	423.14.241	5 / 10 days
		20	6	423.17.402	
	200	10	4	423.18.836	
		20	8	423.14.682	
light-granite	150	10	3	423.14.556	
		20	6	423.18.514	
	200	10	4	423.15.743	
		20	8	423.15.499	
black	150	10	3	423.18.669	
		20	6	423.18.122	
	200	10	4	423.19.744	
		20	8	423.15.908	



- Indoor and Outdoor use
- Quick and easy installation
- Three profiles to suit all levels of protection
- Bright eye-catching reflective yellow markings
- HD version can be cut to size
- Pre-drilled fixing holes

TRAFFIC-LINE Impact Protection – Corner Protectors

Easily fixed in position these corner guards provide a high level of protection against damage caused by accidental contact from fork-lift trucks, road vehicles etc.

TRAFFIC-LINE Corner Protectors are manufactured in Natural/SBR rubber with reflective yellow striping incorporated into the standard and bullnose profiles a yellow metal strip is incorporated into the Heavy Duty version. Standard/bullnose profiles are supplied with pre-drilled fixing holes of 3mm Dia. x 10mm D, whilst the Heavy Duty version is drilled 5mm Dia. x 20mm D.


TRAFFIC-LINE Corner Protectors are designed to protect vulnerable corners of commercial properties, warehouses, distribution depots, factories, public buildings etc.



Profile	H x W x L (mm/set)	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Standard	90 x 90 Internal x 800	black/yellow	2.0	423.20.234	1 / 2 days
Bullnose	115 x 115 Internal x 800	black/yellow	3.7	423.24.136	
Heavy Duty	100 x 100 Internal x 2,500	black/yellow metal inserts	25	423.27.380	5 / 10 days

Impact Protection

TRAFFIC-LINE Impact Protection – for Columns

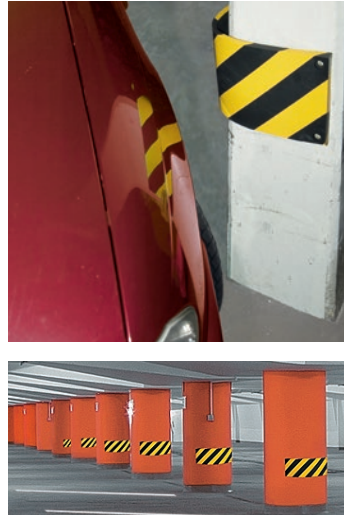

Warning and Protection Profiles

Specifically developed for the protection of internal/external round and rectangular columns, is suitable for most installations but especially applicable where space is restricted.

The many applications include installations where space is restricted, as well as columns, walls, wall protrusions, passages, beams, indoor and outdoor parking lots, warehouse, manufacturing plants, retail outlets etc.

The profiles have reinforcing steel strips inserted during manufacture in order to provide secure anchorage points.

Tip: For installation on rectangular columns, we recommend installing the profile with some clearance around the corners of the columns, as this will improve the shock absorption effect.


- For Indoor and Outdoor use
- For round and rectangular columns
- UV Resistant
- Temperature resistant
- Quickly and easily installed

are moulded in Polyurethane flexible age resistant foam, and are finished with UV resistant yellow/black hazard warning stripes to DIN 4844/EN 7010


- UV resistant yellow/black markings to DIN 4844
- Temperature resistant from -40°C to +90°C
- Fire resistant to UL 94
- Silicone free
- For indoor and outdoor use

Size: (L x H x D) 500 x 200 x 20mm

Standard Marking: yellow/black (according to DIN 4844/EN 7010).



TRAFFIC-LINE HD Buffers


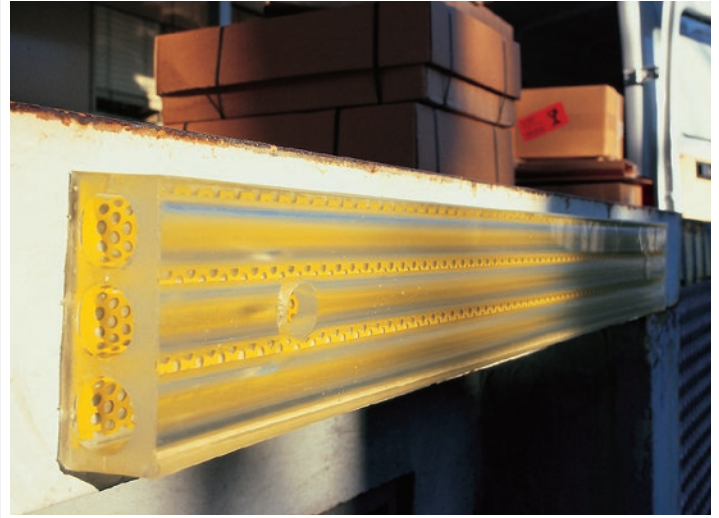


TRAFFIC-LINE HD Buffers provide excellent long lasting shock absorbing properties for use in areas subject to collisions from vehicles such as loading docks or bays, ramps, walls etc.

They are manufactured from age and weather resistant Polyurethane incorporating perforated steel plate for additional stability. The sections are hollowed out to provide maximum shock absorption and have pre-drilled fixing points.

TRAFFIC-LINE HD Buffers are versatile being easily installed in horizontal and vertical positions indoors and outdoors with three cross sections to choose from.

- Quick and easy installation
- Three profiles to suit all levels of protection
- Harder wearing and longer lasting than rubber buffers
- Age and weather resistant
- Ideal for Indoor and Outdoor protection

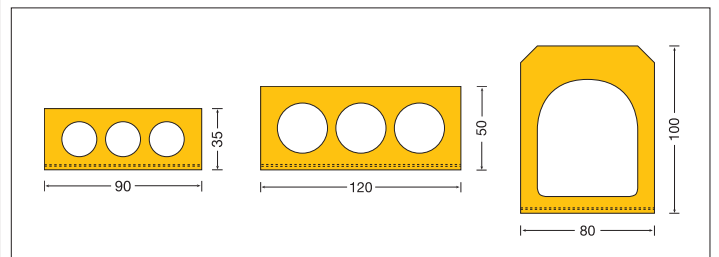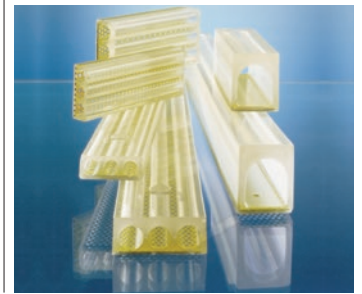

Column Protection	For fixing to Rectangular Columns	For fixing to Round Columns
Delivery weight (kg/ea.)	1,6	1,6
Reference	422.16.620	422.18.949
Typical despatch time (working days)	5 / 10 days	

Description	Length (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Loading bay buffer 35/90	1,000	4	422.15.292	5 / 10 days
Loading bay buffer 50/120	1,000	6	422.16.763	
Loading bay buffer 100/80	1,000	7	422.19.641	



Barrier Chains

The **TRAFFIC-LINE** range of barrier chains are suitable for a wide range of applications and conditions.

They can be used with **TRAFFIC-LINE** Barrier Posts for demarcating and enhancing traffic lanes, pedestrian walkways, car parks etc.

The tensile strength and durability are essential criteria's to consider before purchasing, as depending on where and what they are used for, they could be subject to extremes of stress, weather conditions, vandalism etc.

Most **TRAFFIC-LINE** Barrier Chains are 'stretch tested' horizontally by the metre and the tensile breaking strain, where applicable, is indicated in the product specification table overleaf. In practice the chains will, however, take a greater lateral strain.

M-POLY Visible Barrier Chains

Manufactured from polyethylene these lightweight chains are best employed for indoor use and are extremely economical in price.

M-DEKO Visible Barrier Chains

Manufactured in high quality nylon, these lightweight chains possess the same characteristics as **MNK NYLON** chains, but have not been subjected to tensile strength testing. Consequently **M-DEKO** chains are best employed where the likelihood of stress can be avoided.

MNK NYLON Quality Barrier Chains

Produced in high quality UV and weather resistant nylon, resistant to seawater and most chemicals these highly stress resistant chains have proved their capability over many decades and as such offer a long service life. The links are non-conductive to electricity or heat, are anti-magnetic, and can withstand temperatures ranging from -40°C to $+80^{\circ}\text{C}$.

MNK-NYLON – 3 year manufacturers guarantee.

M-FERRO SIGNAL Barrier Chains

Produced in galvanised steel and coated with weather resistant polyester, these chains offer excellent strength as well as enhanced corrosion protection. They are best suited to applications where strength, durability and signalling effect are required.










SM STEEL Barrier Chains

Produced in galvanised steel, these strong high quality chains offer long service life and corrosion resistance, yet are economical in price. They are particularly ideal for use in areas where maximum resilience stress is required.

STAINLESS STEEL Barrier Chains

Manufactured in stainless steel, these high quality chains are strong and corrosion resistant for a long service life. They particularly complement our range of **CHICHESTER** Stainless Steel Town Bollards, but are equally ideal where this standard of finish is required.

Barrier Chains

	Model	Link gauge Ø (mm)	Material/finish	Link Size (Internal) (mm)	Tensile strength (daN)	Tensile breaking* (daN)
	MNK Quality 6	6	Nylon	42 x 12	200	340
	MNK Quality 8	8	Nylon	51 x 15	340	530
	M-DEKO Visible 6	6	Nylon	53 x 13	-	250
	M-POLY Visible 6	6	Polyethylene	46 x 11		-
	M-POLY Visible 8	8		52 x 11		-
	SM Steel 6	6	Steel/galvanised	41 x 12	250	1.250
	SM Steel 8	8	Steel/galvanised	52 x 15	440	2.200
	M-FERRO Signal	6	Steel/galvanised + plastic coated	41 x 12	250	1.250
	SS 6	6	Stainless steel 14'401	42 x 12	-	1.250

Barrier Chains

TRAFFIC-LINE

Barrier Chain Accessories

A comprehensive range of accessories essential for attaching barrier chains to posts etc. either permanently or temporarily.

Available in packs of 10 (except Stainless Steel connecting links) in a range of colours and finishes to suit most chain colour combinations.



Chain post attachment hook



Chain post attachment hook – Steel



Connecting link – Nylon



Connecting link – Steel



Connecting link with screw

*1 daN = 10 Newton \approx 1 kg

Delivery weight. g/per metre	Colour change (No. of links)	Length (m)	Standard colours	Reference	Typical despatch time (working days)
300	11	50	red/white	210.12.037	1 / 2 days
			yellow/black	210.10.833	
			red	210.10.822	
			white	210.11.697	
			black	210.11.993	
			yellow	210.10.976	
400	9	25	red/white	210.11.278	
			yellow/black	210.10.234	
			red	210.12.774	
			white	210.10.033	
			black	210.11.281	
			yellow	210.10.607	
200	9	50	red/white	211.12.699	
150	13	10	red/white	212.14.592	
			yellow/black	212.15.705	
		50	red/white	212.10.805	
			yellow/black	212.13.380	
200	16	25	red/white	212.19.390	
			yellow/black	212.13.210	
700	–	30	zinc grey	214.12.451	
1.400	–	10	zinc grey	214.10.709	
800	18	15	red/white	213.12.984	
			yellow/black	213.11.240	
800	–	10	natural	217.17.890	5 / 10 days

Description	Qty/ pk.	Material/finish	For use with chain types	Standard Colours	Delivery weight kg/ea.)	Reference	Typical despatch time (working days)
Connecting link	10	Steel/galvanised + plastic coating	MNK Quality M-Ferro-Signal	red	0,8	216.10.614	1 / 2 days
				black		216.12.503	
		Steel/galvanised	SM-Steel	zinc grey	0,5	214.12.849	
				Nylon		M-Visible	
black	216.11.828						
Chain- post attachment hook	10	Steel/galvanised + plastic coating	MNK Quality M-Ferro-Signal	red	0,8	216.12.687	
				black		216.10.012	
		Steel/galvanised	SM-Steel	zinc grey	0,5	214.10.329	
				Nylon		M-Visible	
black	216.10.490						
Connecting link with screw thread 6mm	10	Steel/galvanised	SM-Steel	zinc grey	0,8	214.18.596	
		Steel/galvanised + plastic coating	MNK Quality M-Ferro-Signal	red		216.14.713	
	1	Stainless steel		SS	natural	0,2	216.13.271
Connecting link with screw thread 8mm	1	Stainless steel	SS	natural	0,2	216.18.191	
						216.17.181	

Chain Posts



- Quickly & easily deployed
- Corrosion proof plastic construction
- Low centre of gravity for stability
- Highly visible post colours – red/white or black/yellow



GUARDA Chain Posts

GUARDA Chain posts are the ideal low cost solution for quickly and easily cordoning off areas both indoors and short term outdoors in areas such as warehouses, production areas, retail areas etc.

Posts include chain attachment eyes with 4 positions and are supplied with a choice of one of three base styles.

Also available in useful sets of 6 posts and bases, 10 metres of chain, pack of 10 connecting links and a pack of 10 'S' hooks.

Note: We recommend a maximum 2 metres of plastic chain between each post.



Base type	Colour	Height/Post Ø (mm)	Base (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Plastic, concrete filled (three sided)	red/white	870/40	300 SL	3,4	175.13.895	1 / 2 days
	black/yellow				175.14.011	
Plastic hollow (round)	red/white		300 Ø	2	175.16.320	
	black/yellow				175.18.711	
Hard rubber (four sided)	red/white		265 x 265	2,3	175.19.222	
	black/yellow				175.16.601	
Set: Consisting of 6 chain posts, 10m M-POLY chain, 10 connecting links and 10 hooks						
Plastic, concrete filled (three sided)	red/white	870/40	300 SL	20	175.16.146	1 / 2 days
	black/yellow				175.13.735	
Plastic hollow (round)	red/white		300 Ø	9,5	175.15.850	
	black/yellow				175.17.247	
Hard rubber (four sided)	red/white		265 x 265	12,5	175.19.176	
	black/yellow				175.17.668	



- For Indoor and Outdoor use
- Quickly & easily deployed
- Aluminium posts in 2 colours
- Moulded base for temporary or permanent fixing
- Patented head design
- Secure four point fixing for permanent installations (fixing bolts available at extra cost)

TRAFFIC-LINE Hi-Vis Chain/Posts

An extremely flexible system that provides either temporary or permanent solutions to the segregation of pedestrians from vehicular traffic, which has many applications in parking facilities, industry, warehouses, public spaces and buildings etc.

The Patented rotating head design ensures that the installation and removal of chains is quick and simple. Additionally the head can be secured to prevent the unauthorised removal of chains/ropes. The head is manufactured in UV-resistant ABS plastic.

Specification:



Moulded plastic base: 330mm Ø
Aluminium Post: 60mm Ø

The posts are Powder coated Aluminium whilst the base is moulded and can be either bolted down (4 fixing points) or filled with either sand or water, and is fitted with round reflective panels.

Accessories:

Wall mounted hooks, see page 89.



Surface finish and colours	Dimensions height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
 yellow powder coated	975	2.9 (empty)	179.16.360	5 / 10 days
 red powder coated			179.16.972	

Chain Posts

GUARDA-Flex Chain Posts



GUARDA-Flex chain posts are manufactured in strong plastic featuring integral chain eye hooks and the folding base enables this post to be deployed quickly and effectively. This feature also enables compact storage and less risk of searching for mislaid bases etc. It is ideal for cordoning off pedestrian and vehicular vehicle areas, guidance, quarantine areas, emergency spills etc.

Specification:

Plastic Post: 50mm Ø
Integral base: 280 x 280mm



- For Indoor and Outdoor use
- All plastic construction
- Folds down
- Space saving
- Speedily and easily deployed

Also available as a handy kit of 4 posts plus 10 metres of M-POLY Chain.



Colour	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red/white	900	4.5	175.15.959	1 / 2 days
black/yellow			175.18.435	
Set of 4 GUARDA-Flex Chain Stands with 10m of M-POLY Chain				
red/white	900	18	175.16.132	1 / 2 days
black/yellow			175.18.626	

EXTERN Chain and Warning post – with chain eye



An extremely adaptable and effective chain and warning system consisting of polypropylene post with chain eye and heavy duty base moulded from recycled PVC. The post is finished with a highly reflective red/white finish for excellent visibility.

The **EXTERN** Chain and Warning system offer a flexible and cost effective solution for cordoning off small, medium and large areas, and is suitable for both permanent and temporary applications. The chain eye rotates guiding the chain to any angle required. Simply thread the chain through the chain eye and secure to the end posts with either chain links or hooks from our chain accessory range.

O/All height: 1,000mm
Diameter: 100mm
Base Dimensions: 70mm High x 570mm Ø

Max. recommended distance between posts: 2.5m

- Post moulded in polypropylene
- Base from recycled PVC
- Features rotating chain eye
- Quickly and easily deployed
- Eye catching red/white reflective panels
- Highly stable



Colour	Height/Ø (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Red/white	1,050/100	2.7	290.22.907	1 / 2 days
Recycled base – black (sold separately)		8.5	291.26.009	

EXTERN Heavy Duty Chain Posts – Metal bases



The **EXTERN** is especially suitable for creating temporary or semi-permanent barriers. The base can be filled with sand, gravel, concrete etc. on site. The posts are Hot Dip Galvanised and finished in striking red/white powder coating, complete with 2 chain eyes. The base is manufactured from 2mm wall steel and is treated with a rust resistant finish.

Base dimensions: 300 x 300 x 100mm

Note: The post can be firmly clamped into the base socket. If the **EXTERN** is to be re-positioned then it may be moved by grasping the post only.

- Extremely robust and stable
- Easily and quickly deployed
- Post and base can be clamped together for ease of moving
- Hot Dip Galvanised posts – anti rust coated bases



EXTERN Heavy Duty Chain Posts – Recycled Base



Has all the features of the **EXTERN** with the metal base, except that the base is manufactured in recycled material and that the post features a chain eye cap which allows 6mm chain to be pulled through. This feature allows the posts to be positioned regardless of chain length. Our M-DEKO chain is ideal for use with this barrier system.

Base dimension: 450mm Ø

- Posts easily inserted and removed from base
- Only requires two additional connecting links or chain hooks
- Base has recessed grip feature



Description	Post height/Ø (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Base – without handles	red/white	7,3	170.10.853	1 / 2 days
	black/yellow		170.22.822	15 / 20 days
Base – with handles	red/white	8,3	170.10.985	1 / 2 days
	black/yellow		170.88.001	15 / 20 days

Description	Height/Ø (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Recycled base – with recessed grip	red/white	17.5	170.18.374	5 / 10 days
	black/yellow		170.88.030	15 / 20 days

Red reflective band 200mm (we recommend 2 per post)	1 / 2 days
---	------------

Belt Posts




- For Indoor use
- Quickly and easily deployed
- Flexible queue options
- High quality Stainless Steel
- Damped belt action for smooth retraction

TRAFFIC-LINE Belt Posts Stainless Steel

TRAFFIC-LINE Stainless Steel Belt Barriers are a stylish method of queue management suitable for a wide range of applications. Easily adaptable to changing circumstances and requirements. Featuring a self-tensioning belt with smooth retraction the TRAFFIC-LINE Stainless Steel Belt Barrier offers a luxury finish at affordable cost.

The base is manufactured from heavy steel plate with a stainless steel cover, which gives the Post a high degree of stability due to a low centre of gravity.

Two versions:
With slot in base for space saving nesting.
With round base without recess.

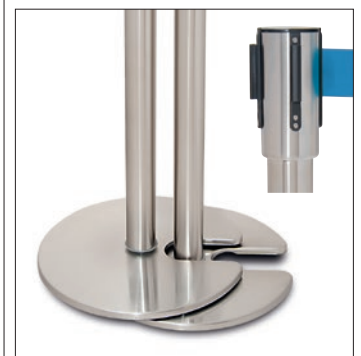

Description	Belt colour/ length	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Standard base 350mm Ø Post top 63mm Ø	blue 2.5m	915	10.5	179.26.979	1 / 2 days
	black 2.5m			179.26.798	
Base with slot 350mm Ø Post top 51/63mm Ø	blue 2.5m	890	9.5	179.24.947	5 / 10 days
	black 2.5m			179.22.136	
Wall clip			0.2	179.23.874	1 / 2 days



- For Indoor and Outdoor use
- Self-tensioning bi-colour 3m and 4m belts
- Aluminium posts in 2 colours
- Moulded base for temporary or permanent fixing
- Secure 4 point fixing if required
- Damped belt action for smooth retraction
- Extremely stable – low centre of gravity

TRAFFIC-LINE Hi-Vis Belt Posts

A supremely flexible system that provides either permanent or temporary demarcation of pedestrian areas from vehicular routes.

Ideal for use in industry, warehouses, car parks, open spaces, public buildings etc.

The self-tensioning belt is easy to pull out and engage with the next post, and retraction is a controlled and smooth action.

Specifications:

Moulded plastic base: 330mm Ø

Aluminium Post: 60mm Ø

The posts are Powder coated Aluminium whilst the base is moulded and can be either bolted down (4 fixing points) or filled with sand or water, and is fitted with round reflective panels.



Accessories:

Wall mounted clips.

Belt link.

See page 89.



Surface finish and colours	Belt length and colours (3.0m)		Dimensions height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
 yellow powder coated	black/yellow striped	3.000	985	2,9	179.14.759	5 / 10 days
		4.000			179.22.511	
	yellow	3.000			179.17.353	
		4.000			179.26.335	
 red powder coated	red/white striped	3.000			179.19.970	
		4.000			179.28.338	
	red	3.000			179.15.362	
		4.000			179.24.575	

Permanent Belt Barriers



- For Indoor use
- Self-tensioning bi-colour 3m belts
- Aluminium posts in 4 colours
- Permanent bases moulded in GRP
- Secure 3 point fixing
- Damped belt action for smooth retraction

TRAFFIC-LINE Belt Posts

The **TRAFFIC-LINE** Belt Posts are an effective method of providing barriers and guidance. They provide the ideal solution for the clear demarcation of pedestrian areas from vehicular traffic in warehouses, industry, public buildings, open spaces etc.


The self-tensioning belt is easy to pull out and engage with the next post, and retraction is a controlled and smooth action.





Specifications:

Aluminium Post dia.: 60mm
 GRP Base plate dia.: 155mm
 (3 fixing points)
 Belt length: 3m

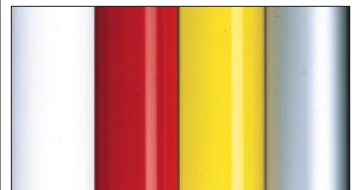Accessories:

Wall mounted clips.



Surface finish and colours	Belt colours	Dimensions height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
 white powder coated	black/silver/black	895	2,3	179.19.753	5 / 10 days
 silver anodised				179.19.416	
 red powder coated	red/white striped			179.88.066	
 yellow powder coated	yellow/black striped			179.88.039	

TRAFFIC-LINE ECONOMY Belt Barrier



The **TRAFFIC-LINE ECONOMY Belt Barrier** is ideal for use as a barrier or guidance system, and is easily and quickly deployed for use as footpath marking or where traffic areas require to be cordoned off.

Designed for use in scenarios as diverse as queue guidance, industrial sites, warehouses, parking facilities, events, public spaces etc.

The self-tensioning belt easily and smoothly deploys from the cassette and attaches to the next post. In-built spring mechanism damps the belt during retraction after use. The unit is usable in both indoor and outdoor environments. The posts are easily detached from the bases for ease of transport and storage.

The dual coloured posts are manufactured in plastic, and the unit's base can be filled on site with sand or gravel for extra stability.



Specification:

Post height 950mm
Post Ø 50mm

- For Indoor and Outdoor use
- Strong plastic build
- Lightweight construction
- Excellent stability
- Low cost

Post colours red/white
black/yellow
Base 360mm Ø
Base colour Black
Belt length 3m
Belt colours red/white diagonal
black/yellow diagonal



Description	Belt colour	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	red/white	950	1,8	179.21.658	5 / 10 days
	black/yellow			179.28.568	

TRAFFIC-LINE Wall Mounted Belt Cartridge *Stainless Steel*



The **TRAFFIC-LINE** Stainless Steel Wall Mounted Belt Cartridges are the ideal solution for where a fixed point barrier is required. The Stainless Steel case houses a 2.5m long belt and is particularly suited where a higher quality appearance is required. The belt is self-tensioning and can be secured to a wall clip or to a **TRAFFIC-LINE** Stainless Steel Belt post (see page 84).

Retraction of the belt is controlled by a centrifugal brake ensuring a smooth action.

Specification:

Cartridge height: 150mm
Cartridge depth: 80mm
Wall bracket: Metal – painted black
Belt length: 2.5m
Belt colour: Blue, Black
Features: Wall clip and wall fixings included

- For Indoor use
- Easily installed
- High quality Stainless Steel
- Damped belt action for smooth retraction
- 2.5 metre belt Blue or Black



Belt colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
blue	1.5	179.20.441	1 / 2 days
black		179.27.140	

Wall Mounted Belt Cartridges & Accessories



- For Indoor and Outdoor use
- Quickly & easily deployed
- Strong warning effect
- Belts in 3m & 4m lengths
- Two mounting methods



TRAFFIC-LINE Wall Mounted Belt Cartridge

TRAFFIC-LINE Wall Mounted Belt Cartridge – Magnetic

The ideal solution for controlling access at fixed or temporary locations.

Two mounting methods:

- For screw fixing to walls, pillars etc.
- Magnetic for steel surfaces such as racking, steel cabinets etc.

The self-tensioning belts are quickly and easily deployed, the free end being simply located in the wall clip supplied or to an adjacent wall cartridge. A smooth and controlled retraction is ensured due to the centrifugal braking system.

A useful accessory is our belt link for joining two belts for gaps up to 8m.

See accessories on page 89.






Specifications:

Cartridge height: 130mm
Cartridge depth: 110mm
Belt width: 50mm

Accessories:

Belt joining clip.
Additional wall clip.



		Screw fixing			Magnetic fixing				
Colours	Belt length (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)		
 black/yellow striped	3.000	1,4	179.18.124	1 / 2 days	1,5	179.27.462	1 / 2 days		
	4.000	1,5	179.23.024		1,6	179.23.187			
 red/white striped	3.000	1,4	179.13.738		1,5	179.27.835			
	4.000	1,5	179.23.085		1,6	179.21.407			
 black/yellow/black	3.000	1,4	179.19.708		5 / 10 days	1,5		179.20.545	5 / 10 days
	4.000	1,5	179.29.337			1,6		179.29.326	
 black/red/black	3.000	1,4	179.16.023	1,5		179.25.944			
	4.000	1,5	179.26.981	1,6		179.23.919			
 black/silver/black	3.000	1,4	179.18.931	1,5		179.21.084			
	4.000	1,5	179.29.945	1,6		179.27.176			

Wall clip



For the Magnetic Cartridge on page 88.


Belt link



For joining two belts, on pages 84, 87 & 88.

Description	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Wall clip	0.2	179.16.000	1 / 2 days
Belt link		179.17.430	

Chain



For chain posts on page 81.

Wall hook



For the Chain posts on page 81.

Chain M-Poly-Visible 6	Length (m)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red/white	10	1	212.14.592	1 / 2 days
black/yellow			212.15.705	

Description	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Wall hook	0,2	179.13.851	1 / 2 days

SKIPPER Cone Mounted Barrier Tape



The **SKIPPER Cone Mounted Barrier Tape** is manufactured in high quality materials for a long and productive life cycle. Easily installed onto Traffic Cones either temporarily or permanently to form an instant barrier, the **SKIPPER** is available with either highly visible red/white or black/yellow diagonally striped tape in 9m lengths. The tapes are kept taut by means of a self-tensioning ratchet which ensure the tapes do not sag when deployed.

Also available is a dummy unit with no tape which offers a lower cost alternative for a two unit installation.

Ideal for use in airports, railways, ports, distribution centres, facilities management, retail shops etc.

- 9m high visibility tape
- Fits all Moravia supplied cones
- Easily & Quickly deployed
- Robust & Durable construction
- Interconnects with other Skipper units

Specification:

Body material: HI Polypropylene
 Colour: Orange
 Belt: Water resistant fabric
 Dimension: 240mm x 145mm
 Belt length: 9m
 Belt width: 50mm
 Colour: Red/white or black/yellow

Description/ Belt colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Skipper unit/red-white	1,2	355.15.309	1 / 2 days
Skipper unit/black-yellow		355.15.109	
Skipper unit/Dummy	0,7	350.88.028	

Barrier Posts



- For Indoor and Outdoor use
- Strong steel post
- Simple screw fixing into base
- Quickly and easily deployed



TRAFFIC-LINE Removable Barrier Post – Surface fix



The **TRAFFIC-LINE** Removable Barrier Post is quick and easy to install and remove. It provides a highly visible deterrent effect at a reasonable cost. The supplied base is fixed by three 80mm depth bolts making this post ideal for use in car parks etc. for blocking off reserved spaces, access ways.

Manufactured from steel tube with an aluminium cap, with sturdy screw thread which screws into the white aluminium base.

Base: Drive over height 30mm.

Finish:
Hot Dip Galvanised and painted red/white.

Please Note: This post simply screws into the base, it does not lock into place. Do not use this product for security purposes.

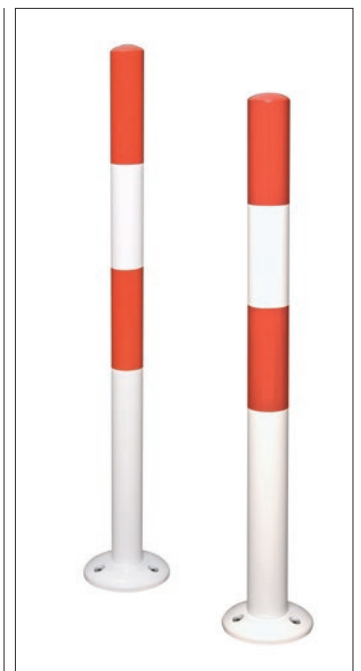

Description	Ø x Wall x Height (mm)	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Base 170mm Ø x 30mm H	60 x 2,0 x 1.030	red/white	5,5	105.24.175	5 / 10 days
	76 x 2,5 x 1.030		6,5	105.21.124	
Reflective rings for 60mm Ø post (recommended 2 per post)					
Reflective rings for 76mm Ø post (recommended 2 per post)					



- Strong steel construction
- Round or square tube options
- Choice of finishes
- Available in four diameters



TRAFFIC-LINE Barrier Posts

TRAFFIC-LINE Barrier Posts are a highly effective and adaptable method of boundary demarcation and are suitable for the restriction of access by vehicles, demarcation of walkways, traffic lanes, industrial sites, car parks, boundary posts etc.

TRAFFIC-LINE Barrier Posts can be used with **CONTROLLER** Drop Down Posts, **MINDER** Removable Barrier Posts and **TRAFFIC-LINE** Railing Systems to create complete traffic control systems. In addition to the normal fixing methods **TRAFFIC-LINE** Barrier Posts can also be

fitted into non-locking Ground sockets.

All **TRAFFIC-LINE** Posts can be supplied with one or two chain eyes.

Sub-surface fixing:




Steel posts with aluminium caps
1,330mm long, 330mm sub-surface
complete with ground anchor.

Surface fixing:

Steel posts with aluminium caps
1,000mm long complete with base with
4 pre-drilled holes. Base dimensions
160 x 140 x 10mm. (Pre-drilled 4 holes)

Removable style:

Steel posts with aluminium caps
1,330mm long, 330mm sub-surface
inserted into ground socket.

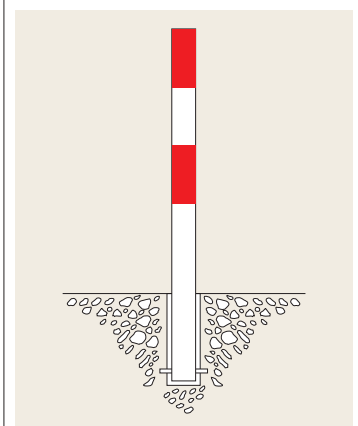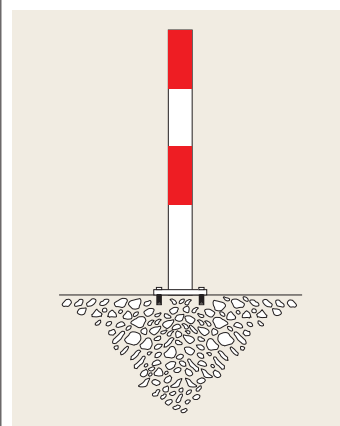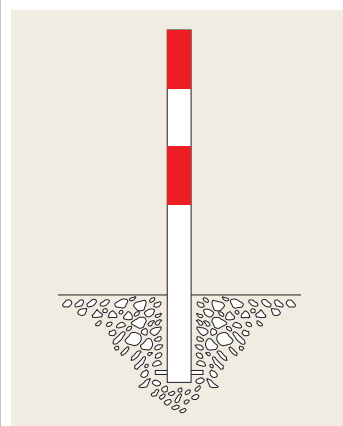

Barrier Posts

60mm Ø TRAFFIC-LINE Barrier Posts – Wall thickness 2mm								
Finish	Colour	Chain eyes	Sub-surface fixing O/all height 1,330mm (330mm sub-surface)			Surface fixing Height 1,000mm		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot dip galvanised and painted	red/white	0	5.5	100.10.016	5 / 10 days	7	100.12.839	5 / 10 days
		1		100.13.027			100.10.083	
		2		100.12.191			100.12.554	
	black/yellow	0		100.11.947	15 / 20 days		100.11.028	
		1		100.13.144			100.11.376	
		2		100.10.784			100.11.853	
Hot dip galvanised and red reflective bands	zinc grey – red	0	100.10.491	5 / 10 days	100.13.031			
		1	100.10.064		100.11.177			
		2	100.11.008		100.12.130			
Hot dip galvanised	zinc grey	0	100.11.255	5 / 10 days	100.12.048			
		1	100.12.523		100.12.996			
		2	100.10.353		100.10.239			
Powder coated	red/white	0	100.10.043	5 / 10 days	100.11.659			
		1	100.12.009		100.11.309			
		2	100.12.507		100.11.595			

76mm Ø TRAFFIC-LINE Barrier Posts – Wall thickness 2.5mm								
Finish	Colour	Chain eyes	Sub-surface fixing O/all height 1,330mm (330mm sub-surface)			Surface fixing Height 1,000mm		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot dip galvanised and painted	red/white	0	7.5	101.13.035	5 / 10 days	8.5	101.10.225	5 / 10 days
		1		101.12.498			101.11.164	
		2		101.11.727			101.12.118	
	black/yellow	0		101.10.007	15 / 20 days		101.11.989	
		1		101.10.074			101.12.943	
		2		101.11.018			101.10.764	
Hot dip galvanised and red reflective bands	zinc grey – red	0	101.13.126	5 / 10 days	101.11.328			
		1	101.10.362		101.12.282			
		2	101.11.299		101.10.101			
Hot dip galvanised	zinc grey	0	101.11.405	5 / 10 days	101.10.006			
		1	101.12.184		101.10.949			
		2	101.13.133		101.11.894			
Powder coated	red/white	0	101.10.036	5 / 10 days	101.10.313			
		1	101.12.776		101.11.258			
		2	101.10.609		101.12.870			

Accessories						
Description	TRAFFIC-LINE Barrier Posts 60mm Ø			TRAFFIC-LINE Barrier Posts 76mm Ø		
	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Non-lockable surface socket	0.6	100.10.773	5 / 10 days	0.8	101.12.484	5 / 10 days
Surface fixing bolts 10/100 (4 per surface fixing post)	0.2	109.17.393		0.2	109.17.393	
Cover cap for sub-surface socket		100.12.773		101.12.156		
Chain eye for wall fixing		109.17.947		109.17.947		
Red reflector ring – recommended 2 per post						

70 x 70mm TRAFFIC-LINE Barrier Posts – Wall thickness 2.0mm										
Finish	Colour	Chain eyes	Sub-surface fixing O/all height 1,330mm (330mm sub-surface)			Surface fixing Height 1,000mm				
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)		
Hot dip galvanised and painted	red/white	0	7.5	102.12.561	5 / 10 days	8.5	102.12.682	5 / 10 days		
		1		102.12.841			102.10.420			
		2		102.12.358			102.10.515			
	black/yellow	0		102.11.765	15 / 20 days		102.11.448	15 / 20 days		
		1		102.12.721			102.11.354			
		2		102.10.550			102.12.310			
Hot dip galvanised and red reflective bands	zinc grey – red	0		102.10.639	5 / 10 days		102.10.702	5 / 10 days		
		1		102.13.005			102.11.632			
		2		102.10.825			102.12.588			
Hot dip galvanised	zinc grey	0		102.12.425			5 / 10 days		102.11.263	5 / 10 days
		1		102.11.392					102.12.213	
		2		102.12.346					102.10.035	
Powder coated	red/white	0		102.10.508			5 / 10 days		102.10.977	5 / 10 days
		1		102.10.165					102.11.920	
		2		102.11.110					102.12.970	

90mm Ø TRAFFIC-LINE Barrier Posts – Wall thickness 2.5mm										
Finish	Colour	Chain eyes	Sub-surface fixing O/all height 1,330mm (330mm sub-surface)			Surface fixing Height 1,000mm				
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)		
Hot dip galvanised and painted	red/white	0	9.5	103.10.646	5 / 10 days	10	103.10.703	5 / 10 days		
		1		103.11.576			103.10.157			
		2		103.10.382			103.11.100			
	black/yellow	0		103.11.316	15 / 20 days		103.12.047	15 / 20 days		
		1		103.12.272			103.12.995			
		2		103.10.091			103.10.814			
Hot dip galvanised and red reflective bands	zinc grey – red	0		103.12.617	5 / 10 days		103.10.446	5 / 10 days		
		1		103.11.594			103.11.381			
		2		103.12.553			103.12.335			
Hot dip galvanised	zinc grey	0		103.13.134			5 / 10 days		103.11.288	5 / 10 days
		1		103.10.600					103.12.242	
		2		103.11.530					103.10.063	
Powder coated	red/white	0		103.12.492			5 / 10 days		103.11.007	5 / 10 days
		1		103.10.310					103.11.946	
		2		103.11.254					103.12.900	

Accessories						
Description	TRAFFIC-LINE Barrier Posts 70 x 70mm			TRAFFIC-LINE Barrier Posts 90mm Ø		
	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Non-lockable surface socket	0.8	102.10.906	5 / 10 days	1.0	103.10.698	5 / 10 days
Surface fixing bolts 10/100 (4 per surface fixing post)	0.2	109.17.393		0.2	109.17.393	
Cover cap for sub-surface socket		102.13.107			103.11.933	
Chain eye for wall fixing		109.17.947			109.17.947	
Red reflector ring – recommended 2 per post						

Barrier Posts



- For Indoor and Outdoor use
- All steel construction
- Self-righting
- Minimizes damage



TRAFFIC-LINE Self-righting Barrier Post

The **TRAFFIC-LINE** Self-righting Barrier Post is ideal for restricted manoeuvring areas where a high risk of damage to property is likely. The post can be deflected up to a maximum of 30° off centre in any direction and will automatically return to its original vertical position. The restriction of 30° reduces the ability of vandals to damage vehicles and nearby property, as can be the case with ordinary self-righting steel posts.

Specification:


Post: 76mm
Wall thickness: 2.9mm
Base plate: 200 x 200 x 10mm

Finish:

Hot Dip Galvanised and Powder Coated.

Versions:

Surface mounting or Sub-surface fix.

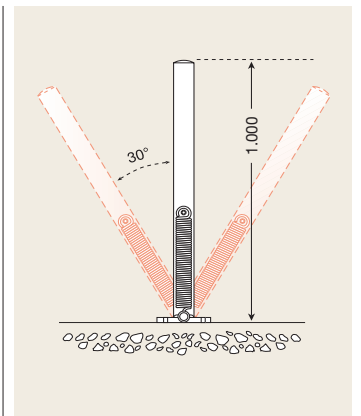

Colour	Surface fix Height 1,000mm			Sub-surface Fix O/all height 1,330mm, 330mm Sub-surface		
	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red/white	8.5	104.15.052	5 / 10 days	9.5	104.16.832	5 / 10 days
black/yellow		104.17.486			104.14.916	
Surface fixing bolts 10/100 (4 required per post – surface fixing type)				0.2	109.17.393	1 / 2 days



- High quality steel
- Profile cylinder lock with 3 keys
- Hot Dip Galvanised
- Automatic locking action



MINDER A Removable Barrier Posts

The **MINDER A** Barrier Post is an ideal choice for use where areas are required to be closed on a temporary or semi-permanent basis, such as paths, access roads, squares, market places etc.

The **MINDER A** is manufactured in strong high quality steel tube and is equipped with a keyed alike profile cylinder lock which self-latches into the ground socket. Three keys are supplied with each post.

Option:
We can offer alternative locking methods or we can install customer issued profile cylinder locks (master key systems).

Finish:
Hot Dip Galvanised and painted red/white.

Installation:
Ground socket concreted into ground.

Accessory:
Cap for ground socket with quick release lock.

Description	Ø x Wall thickness (mm)	Chain eyes	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
With profile cylinder lock + 3 keys, Keyed alike. O/all height 1,330mm (330mm depth sub-surface)	60 x 2.0	0	9	135.17.983	5 / 10 days
		1 L		135.17.321	
		1 R		135.19.561	
		2		135.17.753	
	76 x 2.5	0	9.5	135.13.963	
		1 L		135.15.652	
		1 R		135.18.630	
		2		135.18.529	
	70 x 70 x 2.0	0	9.5	135.16.104	
		1 L		135.18.794	
		1 R		135.15.678	
		2		135.16.662	
Cover cap for ground socket. (Self-locking).	60 Ø		0.5	135.17.900	
	70 x 70			135.17.280	
	76 Ø			135.15.510	

Barrier Posts



- High quality steel
- Easily installed and removed
- Simple, effective locking system
- Hot Dip Galvanised for long service life
- Sub-surface or Surface fixing



Barrier Chains

MINDER B *Removable Barrier Posts*

The **MINDER B** Barrier Post is an ideal choice for use where areas are required to be closed on a temporary or semi-permanent basis, such as paths, access roads, squares, market places etc. For fully integrated Traffic Control they can be used in conjunction with **TRAFFIC-LINE** Railing Systems and Barrier Posts, incorporating **TRAFFIC-LINE** Chains if required.

The **MINDER B** is manufactured in strong high quality steel tube and is equipped with a lock which is operated by a triangular key.

Finish:

Hot Dip Galvanised and painted red/white.

Installation:

Sub-surface (330mm) socket with locking plate.

Surface mounted locking plate (250 x 100 x 45mm).

Key

Triangular key (sold separately to DIN 3223)



60mm Ø		MINDER B – Wall thickness 2mm							
Finish	Colour	Chain eyes	Sub-Surface Fix 0/all height 1,330mm (330mm Sub-surface)			Surface Fix with special locking plate, height 1,000mm			
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	
Hot dip galvanised	zinc grey	0	8	130.12.406	5 / 10 days	8	130.12.177	5 / 10 days	
		1		130.11.447			130.12.405		
		2		130.10.224			130.11.163		
Hot dip galvanised and painted	red/white	0		130.10.465	15 / 20 days		8	130.10.107	15 / 20 days
		1		130.10.469				130.12.123	
		2		130.10.674				130.13.073	
	black/yellow	0		130.12.117				130.13.067	
		1		130.10.884				130.11.823	
		2		130.12.775				130.10.608	

76mm Ø		MINDER B – Wall thickness 2.5mm							
Finish	Colour	Chain eyes	Sub-Surface Fix 0/all height 1,330mm (330mm Sub-surface)			Surface Fix with special locking plate, height 1,000mm			
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	
Hot dip galvanised	zinc grey	0	9.5	131.10.765	5 / 10 days	9.5	131.10.590	5 / 10 days	
		1		131.10.026			131.11.519		
		2		131.12.483			131.10.301		
Hot dip galvanised and painted	red/white	0		131.11.804	15 / 20 days		9.5	131.11.899	15 / 20 days
		1		131.11.699				131.11.829	
		2		131.12.397				131.12.845	
	black/yellow	0		131.11.243				131.12.194	
		1		131.13.143				131.10.654	
		2		131.11.584				131.12.543	

70 x 70mm		MINDER B – Wall thickness 2mm							
Finish	Colour	Chain eyes	Sub-Surface Fix 0/all height 1,330mm (330mm Sub-surface)			Surface Fix with special locking plate, height 1,000mm			
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	
Hot dip galvanised	zinc grey	0	9.5	132.12.656	5 / 10 days	9	132.12.953	5 / 10 days	
		1		132.10.082			132.10.775		
		2		132.10.487			132.11.711		
Hot dip galvanised and painted	red/white	0		132.12.385	15 / 20 days		9	132.12.527	15 / 20 days
		1		132.11.423				132.12.665	
		2		132.12.069				132.10.356	
	black/yellow	0		132.11.027				132.10.498	
		1		132.11.968				132.11.433	
		2		132.12.921				132.12.388	

Accessories		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface fixing bolts 10/100 (4 required per post)		0.2	109.17.393	1 / 2 days
Triangular key (please order separately)			130.12.326	
Keep plate		0.5	130.10.004	5 / 10 days
Cover/dirt cap for ground socket		0.1	130.10.931	
MINDER 60mm Ø. Red reflective bands (2 per post)				
MINDER 76mm Ø. Red reflective bands (2 per post)				
MINDER 70 x 70mm. Red reflective bands (2 per post)				

Parking Posts



- Strong steel construction
- Hot dip galvanised for long life
- Surface or Sub-surface fix options
- Lockable by cylinder key or triangular key.



Barrier Chains

CONTROLLER *Drop-Down Post*

The **CONTROLLER** is an effective deterrent to the unauthorised use of restricted spaces, and is particularly effective in areas such as driveways, car parks, restricted areas in commercial, industrial, private and public buildings.

The **CONTROLLER** post can be supplied with chain eyes (please advise direction of tilt) and red reflective bands.

Specification:

Steel post: 70 x 70mm
 Height-Folded down: 78mm
 Locking plate: 140 x 160 x 10mm

Finish:

Hot Dip Galvanised and painted.

Installation:

Surface fixing and Sub-surface fix.

Versions:

Keyed alike cylinder locking style with two keys – Model A, and Triangular key locking – Model B.

Option:

Individually keyed cylinder locks available to order (no extra cost).

Note:

When ordering with chain eyes, please specify direction of tilt.




70 x 70mm CONTROLLER A – Wall thickness 2mm								
Description	Finish	Colour	Surface Fix O/all height 1,000mm			Sub-Surface Fix O/all height 1,330mm (330mm Sub-surface)		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
With cylinder lock – complete with 2 keys. Keyed alike.	Hot dip galvanised	zinc grey	10	116.12.377	1 / 2 days	10	116.12.751	1 / 2 days
	Hot dip galvanised and painted	red/white		116.10.429			116.12.098	
		black/yellow	116.10.855	15 / 20 days	116.12.961	15 / 20 days		

Accessories				Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface fixing bolts 10/100 (4 per post – surface fixing style)				0,2	109.17.393	1 / 2 days
Additional keys for cylinder lock – keyed alike					110.12.571	
Red reflective bands – 2 per post						
Chain eyes – contact us for prices						15 / 20 days
Individually keyed cylinder locks –no extra cost						

70 x 70 mm CONTROLLER B – Wall thickness 2mm								
Description	Finish	Colour	Surface Fix O/all height 1,000mm			Sub-Surface Fix O/all height 1,330mm (330mm Sub-surface)		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
With triangular key – please order separately	Hot dip galvanised	zinc grey	10	116.13.017	15 / 20 days	10	116.10.390	15 / 20 days
	Hot dip galvanised and painted	red/white		116.12.343	5 / 10 days		116.11.675	5 / 10 days
		black/yellow	116.10.271	15 / 20 days	116.10.783	15 / 20 days		

Accessories				Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface fixing bolts 10/100 (4 per post – surface fixing style)				0,2	109.17.393	1 / 2 days
Triangular key (Please order separately)					130.12.326	
Red reflective bands – 2 per post						15 / 20 days
Chain eyes – contact us for prices						

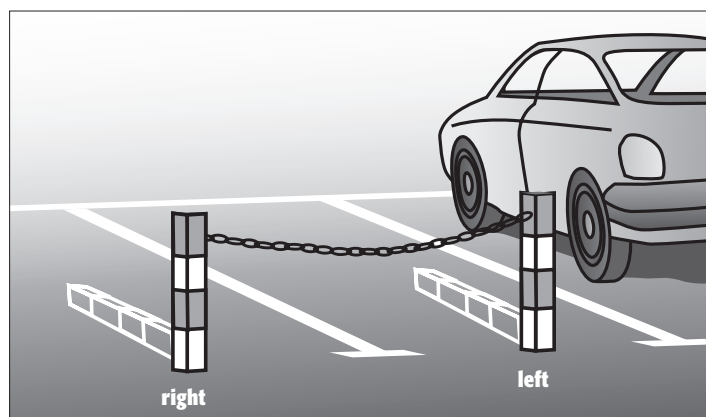

Please advise tilt direction for post with a chain eye.

Parking Posts



- Strong steel construction
- Surface or Sub-surface installation
- Hot Dip Galvanised for long life
- Suitable for most makes of car



COMMANDER Drop Down Frame Post

Prevent the unauthorised use of parking spaces by installing the **COMMANDER Drop Down Frame Post**.

The **COMMANDER Drop Down Post** is a strong and effective car parking post for use in car parks – private and public, multi-story car parks, municipal car parks etc. The construction allows for a low clearance height of 68mm when lowered to suit most makes of cars. The bevelled base helps to protect tyres and hinge mechanism of the post.

Specification:

Steel post: 70 x 50mm
Wall thickness: 3mm
Frame width: 750mm

Frame tube dia.: 33.5mm
Base plate: 220 x 140 x 68mm

Finish:


Hot dip galvanised only or hot dip galvanised with two red reflective bands or additionally painted white.

Installation:

Sub-surface or Surface fix.

Lock:

Cylinder lock complete with two keys, we can supply cylinder locks to match existing keys (at no extra cost), or optionally we can supply with a profile cylinder lock. Please ask for details.

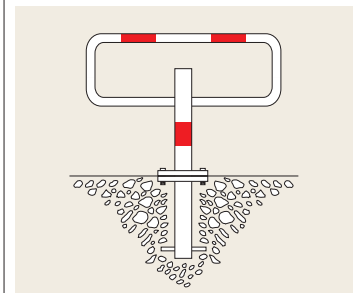

Locking system	Finish	Colour	Surface Fix With base plate. Height 600mm of surface.			Sub-Surface Fix O/all height 900mm (330mm Sub-surface)		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
With mortise cylinder lock 2 keys included	Hot dip galvanised	zinc grey	9.5	112.18.153	1 / 2 days	11	112.13.935	1 / 2 days
	Hot dip galvanised with reflective red bands	zinc grey/red		112.19.889			112.19.774	
	Hot dip galvanised, painted and with red reflective bands	red/white		112.14.827			112.14.005	
Surface fixing bolts 8/100 (4 required per post- surface fix type)						0,2	109.17.393	
Preparation work for Profile cylinder lock - please ask for price								15 / 20 days



- Elegant, modern design
- Semi-automatic operation
- Mortise cylinder locking
- Corrosion resistant



CONTROLLER-PLUS *Semi-Automatic Drop Down Post*

The **CONTROLLER-PLUS** is engineered to blend with and complement modern building styles, but without sacrificing any of the security features of our range of parking posts, making it suitable for installation in private car parks, drives, commercial properties etc.

The **CONTROLLER-PLUS** is very easily operated – to lower simply unlock, give a gentle push, and the post reclines to the ground. To return to the upright position simply press the pedal located in the base, and it will rise and lock automatically.

The post features a very low 75mm in the lowered position making it suitable for use with most cars.

Specification:

Aluminium post: 70 x 50mm

Wall thickness: 3mm

Base plate: 250 x 90mm

Surface treatment:


Anodised aluminium with red reflective strip.

Installation:

Surface mounted.
Fixing bolts supplied.

Locking system:

Mortise cylinder lock with 2 keys supplied. Option of keyed alike or individually keyed.

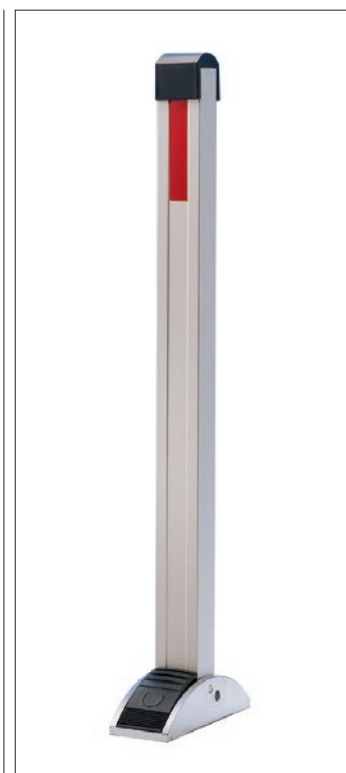


Lock system	Height (mm)	Locking	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
With mortise cylinder lock + 2 keys	950	Keyed alike	5.5	114.19.490	1 / 2 days
		Individually keyed		114.14.132	

Parking Posts



- Strong steel post
- High visual protection
- Flush non trip hazard when lowered
- Recess protected by strong steel plate

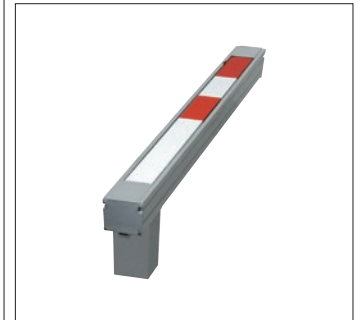

COMMANDER-PLUS

*Flush-Fitting
Drop Down Post*

Installation:

It is important that the excavation is properly drained e.g. gravel layer. We do not recommend installation in areas of standing water (e.g. ground water).

Maintenance:

To ensure on going correct function we recommend that all moving parts are cleaned and lubricated at least twice a year.

The **COMMANDER-PLUS** Drop Down Post combines car park space protection with non-trip benefits to pedestrians and cyclists etc.

The steel post recesses into a strong aluminium trough which is installed by concreting into the ground ensuring the top surface of the trough is flush with the ground surface. When the post is in the upright position the trough opening is automatically protected with a strong steel panel.

Specification:

Steel post: 70 x 70mm
Wall thickness: 2mm
Post height: 900mm

Finish:

Hot dip galvanised only or hot dip galvanised and painted.


Locking systems:

Mortise cylinder lock – keyed alike including two keys (**COMMANDER-PLUS** Model A) or triangular lock (**COMMANDER-PLUS** Model B) to DIN 3223.


Options:

Red reflective bands. Additional colours in epoxy paint.

Suitable for use with all makes of car.

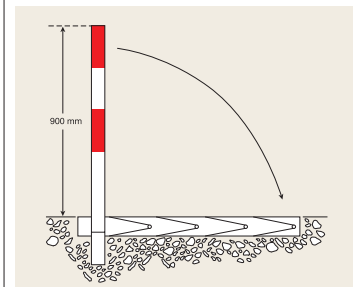

Height (mm)	Finish	Colour	COMMANDER PLUS A With mortise cylinder lock + 2 keys			COMMANDER PLUS B With triangular key lock (Key extra)		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
900	Hot dip galvanised	zinc grey	24	113.11.014	5 / 10 days	24	113.12.225	5 / 10 days
		red/white		113.10.561			113.11.493	
	black/yellow	113.13.584		15 / 20 days	113.16.473		15 / 20 days	
Additional keys for cylinder lock						0.2	110.12.571	1 / 2 days
Triangular key for COMMANDER-PLUS B (Please order separately)							130.12.326	
Red reflective bands								

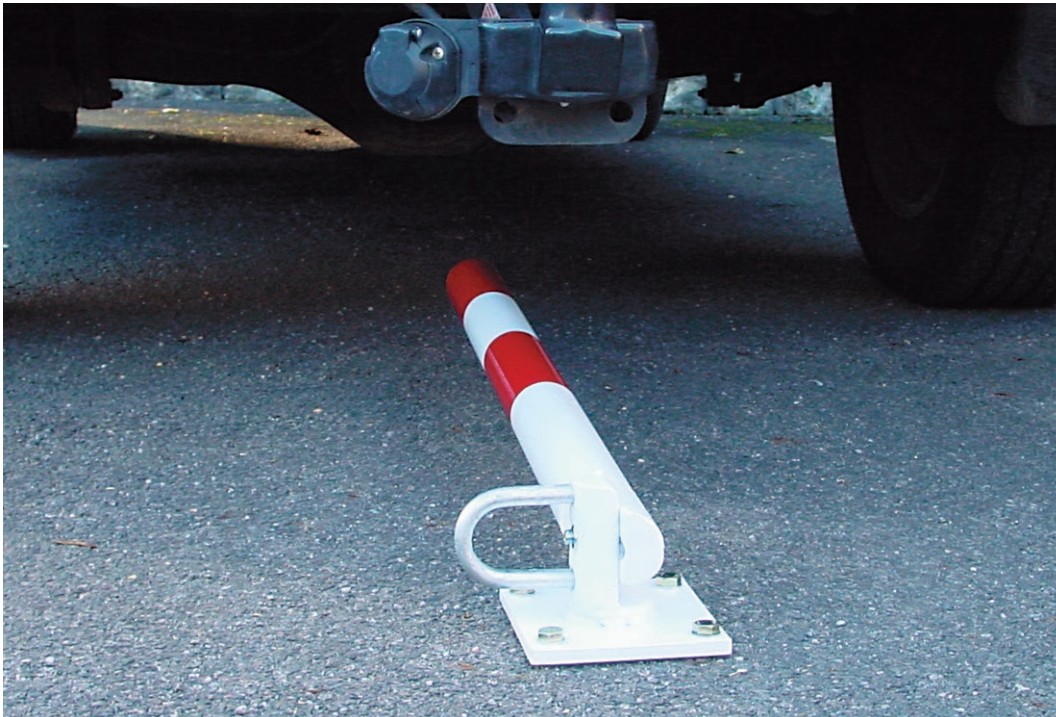

- Effective, strong deterrent
- Easy to install and operate
- Lockable with padlock (not supplied)
- Option of 3 finishes



DEFENDER Drop Down Post

For quality, strength and a highly visible deterrence effect, the **DEFENDER** has it all for use in car parks, access to parking bays, driveways etc.

The **DEFENDER** is securely locked in position by means of a 'U' shaped locking pin, secured by a padlock (not supplied). Please ensure padlock shank does not exceed 5mm Ø.

The **DEFENDER** has a drive over height of 110mm.

Specification:


Steel post: 60mm Ø
Wall thickness: 2mm
Base plate: 160 x 140 x 10mm
(Surface fix)

Finish:

Hot dip galvanised or hot dip galvanised and painted.

Installation:

Sub-surface fix (with ground anchor) or Surface fix.

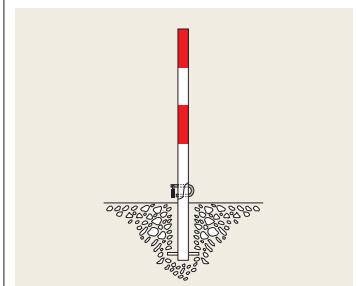

Locking system	Finish	Colour	Sub-Surface Fix			Surface Fix		
			O/all height 1,330mm (330mm Sub-surface)			Height 1,000mm		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
With 'U' locking pin for padlock (padlock not supplied)	Hot dip galvanised	zinc grey	10	120.10.102	97,00	8,5	120.12.311	1 / 2 days
	Hot dip galvanised and painted	red/white		120.11.389	103,00		120.12.749	
		black/yellow		120.11.990			120.12.019	
Surface fixing bolts 8/100 (4 required per post)						0,2	109.17.393	1 / 2 days
Red reflector bands (2 per post) – contact us for prices								
Chain eyes – contact us for prices								15 / 20 days



- Suitable for use on public roads
- Tear resistant cellular sleeves
- Blow moulded top with easy grip feature
- 100% recyclable base



TRAFFIC-LINE Traffic Cones

The **TRAFFIC-LINE** range of Traffic Cones are manufactured to the highest quality and meet all UK regulations for road cones. The TC 1 and TC 2 models are of two part construction with the bases manufactured in recycled material with anti-slip features. The bodies of the cones are fitted with high performance prismatic sleeves for excellent daytime luminance and night time reflectivity. The TC 3 model is of a one piece ballast filled construction with the same high quality sleeve as TC 1 and TC 2.

Standards:
 Conforms to requirements of
 BS EN 13422
 Chapter 8 – The Traffic Signs Manual
 The Red Book 2013
 Traffic Signs & General Directions

Model	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
TC 1 (two piece)	500	3.3	350.15.478	1 / 2 days
	750	6.3	350.16.862	
	1,000	8.6	350.17.100	
TC 2 (two piece)	460	2.4	350.18.349	
TC 3 (one piece ballast filled)	750	5.6	350.13.537	



- Strong durable design
- Easy viewing from three sides
- Easily and quickly deployed
- Stackable

TRAFFIC-LINE *No Waiting Bollard*

The **TRAFFIC-LINE** No Waiting Bollard is perfect for highlighting and marking off parking restrictions. Manufactured from recycled PVC the three sided design enables the restriction sign to be clearly and easily viewed.

Standards:
 Chapter 8 – The Traffic Signs Manual
 The Red Book 2013
 Traffic Signs Regulations & General Directions

Site Management

Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
500	4	350.88.005	1 / 2 days

Site Safety & Maintenance

TRAFFIC-LINE Fluorescent Traffic Cones



TRAFFIC-LINE Fluorescent Traffic Cones are ideal for use on private premises and private roads*. They are quickly and easily deployed to warn of hazards or to form a barrier.

Manufactured in bright red-orange PVC with white fluorescent bands for good day light visibility.

Available in three heights:

350mm with 1 white ring
500mm and 750mm with two white rings.

*Please note that these cones do not conform to UK public roads legislation and should only be used as above.

- PVC one piece construction
- Durable
- Excellent warning effect



Chain attachment kit – for Traffic cones



Simply install by twisting the chain hook into the open top of the cone, the flexible fins will engage securely, and attach chain.

The chain hooks are moulded in white Polyethylene (PE) for flexibility. The chain is our 10 metre M-Poly Visible barrier chain Red/white.


Can also be used with our **TRAFFIC-LINE** Barrier Tape (See page 109)

Kit contents:

5 x Chain Hooks and 10m red/white Chain (M-Poly Visible).
Please select traffic cones required from pages 104, 106.

Additional chain hooks available in packs of 10.

- Ideal for temporary traffic management
- 2-piece kit
- Value for money

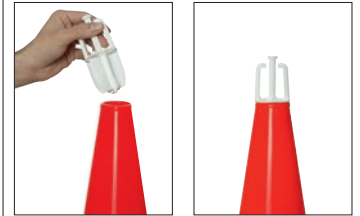

Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
350	1.4	353.15.697	1 / 2 days
500	1.7	353.14.107	
750	4.8	353.19.386	

Description	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Chain hook & chain kit	2.3	353.38.516	1 / 2 days
Chain hook pack 1 pack = 10 pieces	0,8	353.25.477	



- Stable plastic tripod
- Highly reflective sign panels
- Folds down for ease of transportation and storage
- Full range of road signs available
- Supplementary texts available

TRIO
Folding Traffic Signs

The **TRIO** Folding Traffic Sign is quickly and easily deployed to give advance warning of impending hazards such as road works, accident scenes, hazardous zones etc.

Mountable on sturdy plastic folding tripods these signs are produced in strong Vinyl material which ensures a long service life. The sign face meets the requirements of BS EN 12899-1 Class 2 reflectivity and the whole sign meets the requirements of The Red Book 2013.

- Specifications:**
- Stand: Foldable tripod
 - Material: Plastic
 - Signs: Vinyl Class 2 reflective



Site Management

Description of sign	Size (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Men at work	750	5	344.19.625	5 / 10 days
Men at work with "End" Supplementary text		5.25	344.16.313	
Road narrows nearside		5	344.13.504	
Road narrows offside			344.15.782	
Reversible keep left/right		5.5	344.16.373	
Reversible pedestrian arrow	600 x 450	4.5	344.16.548	

Full range of UK folding Traffic Signs is available – POA

Site Safety & Maintenance

TRAFFIC-LINE Trench Covers



TRAFFIC-LINE Trench Covers are available in two grades of material, Blow Moulded HDPE and GRP. The HDPE version is lighter to handle and has a SWL of 400kg, whilst the GRP version is a heavier duty model and features a SWL of up to 700kg. Both types are non-rusting moulded panels enabling access across excavations. **TRAFFIC-LINE** Trench Covers have anti-trip edges and feature non-slip surfaces as standard.

The HDPE version has the added advantages that it has reflective strips, can be easily handled by one operative and is 100% recyclable.

Specifications:

HDPE Style

Material: High Density Polyethylene
 SWL: 400kg
 Colour: Yellow with reflective strips
 Standards: National Grid T/SP/E/42
 The Red Book 2013

- Easy installation – easy management
- Anti-slip features – even when wet
- Reduce theft – no scrap value

GRP Style

Material: Glass Reinforced Plastic
 SWL: 700kg
 Colour: Yellow

HDPE Trench Cover SWL 400kg	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1,200mm L x 800mm x 40 mm H	Yellow	10	279.55.350	1 / 2 days

GRP Trench Cover SWL 700kg	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1,200mm L x 800mm	Yellow	16	279.16.555	1 / 2 days

LADDER-SENTRY Anti-climb Protection



The **LADDER-SENTRY** provides an effective, quick and simple method of preventing unauthorised scaling of ladders.


Easy to fit, the **LADDER-SENTRY** comes complete with securing chain and padlock ready for immediate use to protect ladders on construction sites, fixed access ladders, roof ladders etc.

Manufactured in aluminium for corrosion resistance, the **LADDER-SENTRY** is also available in 325mm width. Keyed alike padlocks are a further option.

- Quick & easy to fit and remove
- Prevents unauthorised scaling of ladders
- Fits most ladders in seconds
- Secured by padlock

Dimensions (mm) W x L	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
250 x 1,500	4	400.10.520	1 / 2 days

TRAFFIC-LINE Barrier Tapes




- Extra strong tear-resistant tape
- Printed both sides
- UV resistant print
- Supplied in handy dispenser packs

TRAFFIC-LINE Barrier Tapes are ideal for quickly and cost effectively highlighting and cordoning off hazardous areas.

These tear-resistant polyethylene barrier tapes are supplied in a useful dispensing carton for quick and controlled deployment in emergency situations.

TRAFFIC-LINE Barrier Tape Stands



- Quick and easy to use
- Forged steel pointed tip

These stands are simply pushed into the ground for the quick and easy deployment of Barrier Tapes.

FLEXI Extendable Trellis Barriers




These exceptionally strong expanding barriers are very quickly and easily deployed to highlight no go areas on garage forecourts, closing off lift access, access ways, exits and entrances, hazardous areas, spills etc.

Available in two versions – As detailed below.

FLEXI-LIGHT Barrier

Light duty model

Height: 1,000mm
 Trellis bars: 25mm x 4mm
 Foot depth: 500mm
 Finish: Red/white dip painted
 Red reflective strips
 Black/yellow dip painted
 Net weight: 12kg



- Strong steel construction
- Chain hooks incorporated
- Quick and easy deployment
- Red reflective warning strips
- Two versions

FLEXI-BARRIER

Heavy duty model

Height: 1,000mm
 Trellis bars: 40mm x 5mm
 Foot depth: 500mm
 Finish: Red/white dip painted
 Red reflective strips
 Net weight: 19kg



Colour	Dimensions	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red/white	80mm W x 500m L	2	330.10.147	1 / 2 days
black/yellow		2.5	330.12.762	

Colour	Dimensions (mm) H x Ø	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red	1,250 x 12	2	339.12.480	1 / 2 days

Model	Max. width mm (when extended)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
FLEXI-LIGHT Barrier red/white	3.600	16	340.11.363	1 / 2 days
FLEXI-LIGHT Barrier black/yellow			340.88.015	
FLEXI-Barrier	4.000	24	340.12.455	



TRAFFIC-LINE Crowd Barriers – HDPE

This innovative Crowd Barrier is manufactured in virgin HDPE with no screws or rivets used in the assembly. It is completely recyclable and will not rust, is remarkably durable and strong ensuring a long productive life-cycle. Lighter than traditional metal barriers it is easily handled and deployed on flat or uneven ground. Easily stacked for storage due to 360° swivel feet

Suitable for crowd control, festivals, events, queue control etc.

Specification:

Material: High Density Polyethylene (HDPE)

Colour: Grey

Feet: Black HDPE

- No sharp edges
- Feet swivel for compact storage
- Strong durable construction
- Easily and quickly deployed
- Deployable on uneven ground
- Recyclable



Dimensions (mm) W x H x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
2,000 x 1,100 x 50	9.9	230.31.607	1 / 2 days



- Quickly and easily deployed
- Three models
- All models interlock

TRAFFIC-LINE
Crowd Barriers – Steel

TRAFFIC-LINE Crowd Barriers are supplied in three versions that meet most requirements, comprising of fixed leg (2 widths) and Low Profile Stands (LPS type), the latter barrier featuring virtually flat support feet to reduce the risk of tripping. All barriers interlink irrespective of style to form a connected barrier.

TRAFFIC-LINE
Fixed Leg 23 Crowd Barrier

Frame: 38.1mm Ø
 Infill bars: 15
 Infill bars dimension: 12.75mm Ø
 Finish: Galvanised
 Style: Fixed leg

TRAFFIC-LINE Crowd Barriers are flexible in use and are used in crowd control situations, demarcation of pedestrians from vehicle routes, public gatherings, events, queue control etc.

TRAFFIC-LINE
Fixed Leg 25 Crowd Barrier

Frame: 38.1mm Ø
 Infill bars: 18
 Infill bars dimension: 12.75mm Ø
 Finish: Galvanised
 Style: Fixed leg



TRAFFIC-LINE
LPS Style Crowd Barrier:

Frame: 38.1mm Ø
 Infill bars: 18
 Infill bars dimension: 12.75mm Ø
 Finish: Galvanised
 Style: Flat style removable feet

Model	Dimensions (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Fixed leg 23	2,250 x 1,100	13	230.18.230	3 / 5 days
Fixed leg 25	2,580 x 1,100	15	230.17.740	
LPS Type	2,580 x 1,100	14	230.16.638	
Feet for LPS Type		2.5	230.19.513	

Site Safety & Maintenance

TRAFFIC-LINE Pedestrian Safety Barriers – HDPE



The **TRAFFIC-LINE** Pedestrian Safety Barrier is easily and quickly deployed to warn pedestrians of potentially hazardous situations. Now produced in High Density Polyethylene (HDPE) it features a higher reflective area to meet various legislations. Available in 3 gate or 4 gate versions, the barrier is easily deployed and despite being lighter in weight is remarkably stable when used.

The **TRAFFIC-LINE** Pedestrian Safety Barrier is fully approved by Openreach.

- Quickly and easily deployed
- Highly stable and durable
- Light weight moulding
- Moulded in strong HDPE
- Recyclable

Specification:

Frame: High Density Polyethylene (HDPE)
 Gates: 3 or 4
 Colour: Red with red/white reflective panels

Standards:

Reflectivity requirements of BSEN 12899-1
 Chapter 8 – The Traffic Signs Manual
 Safety at Work & Road Works – a Code of Practice
 Traffic Signs Regulations & General Directions

Dimensions (mm) W x H x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1,000 x 750 x 20	3 Gate 5.4	341.31.288	1 / 2 days
	4 Gate 7.2	341.33.159	

TRAFFIC-LINE Works Barriers – HDPE



TRAFFIC-LINE Works Barriers are manufactured in HDPE material which is UV resistant, and is coloured bright orange with red/white reflective panels which makes them highly visible in day or night conditions. The Barriers can be connected to each other by a 'hook and eye' system, which makes them very adaptable for use on uneven ground. The Barriers are lightweight but stable incorporating non-trip feet that swivel 360° for compact transportation and storage. These barriers are suitable for applications involving road works, construction sites, events etc.

Specifications:

Material: High Density Polyethylene
 Colour: Orange
 Panel: Red/white reflective
 Feet: Black HDPE

Standards:

Conforms to requirements of BS EN 8442
 Reflectivity to BS EN 12899-1
 Chapter 8 – The Traffic Signs Manual
 The Red Book 2013
 Traffic Signs Regulations & General Directions

- Quickly and easily deployed
- All plastic construction
- Non-trip feet swivel 360°
- Moulded in lamp carrier
- Reflective panels for high visibility
- Recyclable



Dimensions (mm) W x H x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
2,000 x 1,000 x 50	14	230.27.647	1 / 2 days



- Improved for fast and easy assembly
- Reflective panels for high visibility in poor light
- Completely recyclable



TRAFFIC-LINE Barrier Board Systems

TRAFFIC-LINE Barrier Board Systems are an effective and versatile system of traffic and pedestrian control, and are ideally suited to cordon off road works, excavation sites, building sites etc.

Now much improved with stronger boards more easily fixed into redesigned upright posts moulded in HD Polyethylene (HDPE). The redesigned bases are manufactured from recycled materials and can be doubled up for greater stability.

The New **TRAFFIC-LINE** Barrier Board System is compatible with existing systems, so no need to scrap your existing system. The system at end of life is completely recyclable.

MIRA Wind Tunnel tests confirm stability of the system as below:

Assembled format	Windspeed (mph)
Recommended Ballast weight (kg)	
2 posts, 2 Planks, 2 Bases	20.6 0
2 posts, 2 Planks, 2 Bases	40.3 10
2 posts, 2 Planks, 2 Bases	59.8 25
4 posts, 8 Planks, 4 Bases (Boxed)	61.6 20

Standard BS 8442:2006 states all temporary traffic barriers must be able to withstand 3 different classes of wind speed with the use of ballast as below:

Class A:	26.3m/s	(58mph)
Class B:	17.6m/s	(39mph)
Class C:	8.7m/s	(19mph)

Standards:

Conforms to BSEN 8442
Reflectivity to BSEN 12899-1
Chapter 8 – The Traffic Signs Manual
The Red Book 2013
Traffic Signs Regulations & General Directions

Specification:

Height: 1,170
Material: HDPE
Colour:
Posts: Orange
Planks: Orange with red/white reflective panels
Feet: Recycled material
Colour: Black

Description	Length (mm)	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
HDPE Plank	1,250	red/white reflective	2.0	361.26.598	1 / 2 days
	2,000		2.75	361.28.283	
Upright	1,170	orange	1.5	361.23.859	
Base	N/A	black	4.5	361.29.439	

Site Safety & Maintenance



- Easily & Quickly deployed
- Sturdy HDPE construction
- Anti-trip features
- Available in red and white
- Just fill with water

TRAFFIC-LINE-Water Filled Barrier/Separator



The **TRAFFIC-LINE** Water Filled Barrier is specially designed for ease of use and handling.

Incorporating an anti over fill feature it's unique design creates a safer environment for pedestrians, and makes a bold eye-catching separator for traffic and pedestrian ways. It is easily connected using our 'S' clips, and can be positioned back to back over exposed manhole covers and holes. Weighing just 5.5kg when empty it is easily positioned prior to filling with water to reach it's 27.5kg operational weight. Reflective red/white panels add to the barriers visibility in most light conditions.

At end of life the barrier is completely recyclable.

Standards:
Reflectivity requirements of
BSEN 12899-1

Colour	Dimensions H x W(mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red	800 x 1,040	5.5	361.34.453	1 / 2 days
white			361.36.154	

TRAFFIC-LINE Traffic Posts Flexible Posts



TRAFFIC-LINE Flexible Posts are a lightweight cylinder used to guide traffic or provide warning of approaching hazards. Manufactured in HDPE material with Retro-reflective sleeves they are used to separate single lines of traffic around or through a temporary obstruction, to form a barrier between contra-flow traffic on motorways and dual carriageways etc.

A special joint in the base ensures that they are self-righting after a collision.

An integral bayonet connector fits into the optional base which can be bolted to the ground or fixed with a commercial adhesive.

Standards:

Conforms to requirements of
BS EN 13422
Chapter 8 – The Traffic Signs Manual
The Red Book 2013
Traffic Signs Regulations & General
Directions

- Use Indoors and Outdoors
- Easily and quickly fixed in 'cats eyes' or optional base
- Highly visible day or night
- Self-righting

Specification:

Diameter: 100mm
Material: High Density Polyethylene (HDPE)
Colour: red/orange
Sleeve: Retro-reflective sleeve-cellular construction
Base:
Material: Recycled plastic
Colour: Black

Model	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
46-BSF	460	1.5	291.18.800	1 / 2 days
76-BSF	760	2	291.18.390	
100-BSF	1,000	2.5	291.13.489	
Recycled base (270mm Ø)		2	291.11.145	

TRAFFIC-LINE Traffic Posts Memory Posts



TRAFFIC-LINE Memory Posts are a lightweight cylinder used to guide traffic or provide warning of approaching hazards. Manufactured in HDPE material with Retro-reflective sleeve they are used to separate single lines of traffic around or through a temporary obstruction, to form a barrier between contra-flow traffic on motorways and dual carriageways etc.

An integral bayonet connector fits into the optional base which can be bolted to the ground or fixed with a commercial adhesive.

Standards:

Conforms to requirements of
BS EN 13422
Chapter 8 – The Traffic Signs Manual
The Red Book 2013
Traffic Signs Regulations & General
Directions

- Use Indoors and Outdoors
- Easily and quickly fixed in 'cats eyes' or optional base
- Highly visible day or night

Specification:

Diameter: 100mm
Material: High Density Polyethylene (HDPE)
Colour: red/orange
Sleeve: Retro-reflective sleeve-cellular construction
Base:
Material: Recycled plastic
Colour: Black

Model	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
46-BSM	460	1.5	290.17.551	1 / 2 days
76-BSM	760	2	290.16.336	
100-BSM	1,000	2.5	290.19.525	
Recycled base (270mm Ø)		2	291.11.145	

Traffic & Pedestrian Management



- Use Indoors and Outdoors
- Easily and quickly fixed into optional base
- Highly visible day or night
- Self-righting



TRAFFIC-LINE Traffic Posts Off-Highway

TRAFFIC-LINE EU-Flexible Posts are a lightweight cylinder used to guide traffic or provide warning of approaching hazards. Manufactured in HDPE material with Retro-reflective sleeves they are used on non-public roads, private property such as distribution depots, warehouses, car-parks etc. A special joint in the base ensures that they are self-righting after a collision.


An integral bayonet connector fits into the optional base which can be bolted to the ground or fixed with a commercial adhesive.

Specification:

Diameter: 100mm
 Material: High Density Polyethylene (HDPE)
 Colour: red/orange
 black/yellow

Sleeve: Retro-reflective sleeve-cellular construction – red/white
 Retro-reflective sleeve-cellular construction - black/yellow

Base:
 Material: Recycled plastic
 Colour: Black

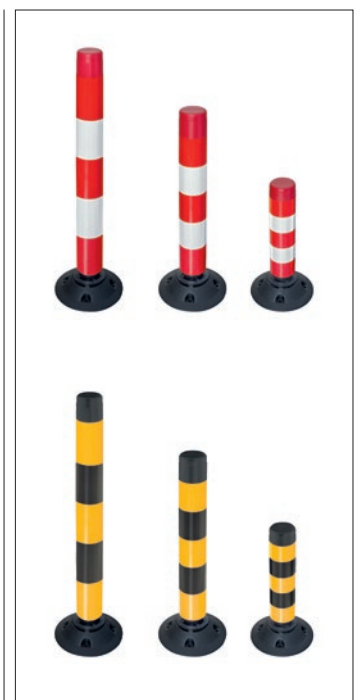

Modell	Height (mm)	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
46-TL	460	red-white	1,5	291.10.114	1 / 2 days
		black-yellow		291.28.861	
76-TL	760	red-white	2	291.12.496	
		black-yellow		291.25.790	
100-TL	1.000	red-white	2,5	291.11.558	
		black-yellow		291.27.118	
Recycled base (270mm Ø)	60	black	2	291.11.145	

FLEXBack Traffic Post



The **FLEXBack** Traffic Post is a single piece guide post with an integrated base which anchors onto a suitable surface.

Manufactured in a special thermo-plastic polyurethane (TPU), **FLEXBack** posts can be driven over without causing damage, returning to their upright position time and time again.

Moulded in Signal red with reflective white bands for high visibility they are used in areas such as car-parks, distribution centres, forecourts etc.

Specification:

Height: 460mm with two white stripes.
760mm with three white stripes.
1,000mm with four white stripes.
Post: 80mm Ø
Integral base: 200mm Ø

- Easily installed
- Highly visible
- Self-righting
- Long lasting



Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
460	2	290.22.452	1 / 2 days
760	2,5	290.23.682	
1.000	3,0	290.28.332	

TRAFFIC-LINE Flexible Verge Markers



TRAFFIC-LINE Flexible Verge Markers are the safe and effective method of highlighting road edges, bends etc. Manufactured in recyclable polyethylene they will withstand vehicular impact, and built in design features minimise injury to motorists, cyclists and pedestrians. They are widely used on public roads, drives, private roads, motor racing circuits etc.

Easily installed, the design incorporates a ground anchor and is produced in material that has rebound properties.

Specification:

Material: UV stabilised Polyethylene (PE)
Colour: Black/white
Reflectors: Shatterproof Red and white
Class: Class 1 or 2

Standards:

Traffic Signs Manual Chapter 4 2004 (Warning Signs).

- Easily installed
- Corrosion free
- UV stabilised
- Maintenance free
- 100% recyclable material

Model	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
100-VM	1,097 O/all (997mm above ground)	1.1	168.26.477	1 / 2 days

Traffic & Pedestrian Management



- Use Indoors and Outdoors
- With chain eyes
- Easily and quickly fixed into optional base
- Highly visible day or night
- Effective 'Keep Out' warning

TRAFFIC-LINE Traffic Posts – with Chain Eyes

Cordon areas off economically and effectively with this innovative product. Based on the standard Off-Highway Traffic Post, the addition of chain eyes makes this post an affective barrier system. Simply thread the chain through each eyelet and secure start and end posts with links or hooks.

This system provides a highly visible barrier in day or night conditions and is used in car-parks, logistics depots, warehouses, public spaces, private road etc. on both temporary and permanent applications.

An integral bayonet connector fits into the optional base which can be bolted to the ground or fixed with a commercial adhesive.

Specification:

Diameter: 100mm
 Material: High Density Polyethylene (HDPE)
 Colour: red/orange
 Sleeve: Retro-reflective sleeve-cellular construction – red/white
 Base:
 Size: 270mm Ø x 60mm H
 Material: Recycled plastic
 Colour: Black

Our recommended chain for this system is our **M-POLY Visible 6**.

Maximum spacing between posts: 2m.

Note:

These posts **do not** conform to British Standards. **Not** to be used on Public highways.



Model	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
100-TL	1,050	2.7	290.22.907	1 / 2 days
Recycled base (270mm Ø)		2	291.11.145	



- For Indoor use
- Variable mounting height
- Red/white retro-reflective sleeve
- Highly visible day or night

TRAFFIC-LINE-Guide Posts - Suspended

The **TRAFFIC-LINE** Guide Post is manufactured in Polyethylene material, with red/white retro-reflective panels for high visibility day and night. It is designed to be attached to the floor and the ceiling by means of a cable kit which can be tensioned.

It is primarily intended for use in identifying shafts, air intakes, conduits – in fact any wall projection or hazard in buildings where there is traffic movement e.g. multi-story car-parks, underground garages etc. as well as highlighting traffic ways, entrances and exits.

Specification:

Post: 100mm Ø
 Material: Polyethylene
 Colour: Red/white retro-reflective sleeve
 Steel cable: 2,500mm L (includes clamps and turnbuckle).



Installation	Height (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
red-white	950	2,5	290.28.881	5 / 10 days
black-yellow			290.22.266	

Traffic & Pedestrian Management

TRAFFIC-LINE Kerb Ramps – HDPE



The **TRAFFIC-LINE** Kerb Ramp is manufactured in High Density Polyethylene (HDPE) for strength and durability. It can accommodate kerb heights from 75mm to 125mm and can be fixed permanently if desired via four fixing holes moulded in. The surface is embossed with an anti-trip pattern making it safe in use.

Easily transported for use by delivery drivers and ideal for use in hospitals, warehouses, airports, storage depots etc.

Specification:

Material: High Density Polyethylene (HDPE)
 Colour: Yellow
 SWL: 250 kg

- Easy to transport – lightweight
- HDPE – no corrosion worries
- Handles incorporated for easy lifting
- Effective anti-slip surface
- Recyclable

Standards:

Conforms to National Grid T/SP/E/42
 A Code of Practice 2013



Dimensions (mm) W x D x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
985 x 1,200 x 90	8	279.32.506	1 / 2 days

TRAFFIC-LINE Kerb Ramps – GRP




TRAFFIC-LINE GRP Kerb Ramps are a useful aid in moving loads from one level to another. They are an effective alternative to other materials used as ramps such as plywood, steel, tarmac, concrete etc. plus they have no scrap value, reducing the risk of theft. Highly suitable for use in areas such as hospitals, delivery drivers, warehouses, airports, storage depots etc.

Available in two versions – standard with SWL 350kg and Heavy duty with SWL 750kg making the latter capacity suitable for motorised wheelchairs.

TRAFFIC-LINE GRP Kerb Ramps are manufactured in bright yellow material with a textured non-slip surface with reflective strips for additional visibility and bolt down points in all four corners.

Compliant with UK & European legislation.

- Easy to transport – lightweight construction
- GRP material – no corrosion worries
- Anti-slip surface
- Non slip rubber feet
- Reflective strips



SWL (kg)	Dimensions (mm) W x D x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
350	690 x 1,250 x 50	9	279.18.230	1 / 2 days
750		12	279.12.680	

TRAFFIC-LINE Hose/Cable Ramps



The **TRAFFIC-LINE** Hose/Cable Ramp is a quick and easy method of protecting cables and hoses from passing traffic up to HGV weight (40 tonnes).

Ideal for temporary or semi-permanent situations they can be used individually or joined together. Used by many fire brigades these versatile ramps are also used by contractors, building sites, pumping operations etc.

Specification:

Size (mm): 855 L x 300 W x 85 H


Material: Rubber

Colour: Black with yellow reflective strips

Capacity: 2 x 75mm Ø Hoses/Cables

Other sizes available – please ask for details.

- Easily and quickly deployed
- Extremely resilient
- Yellow reflective strips for day/night visibility
- Reduces traffic speed

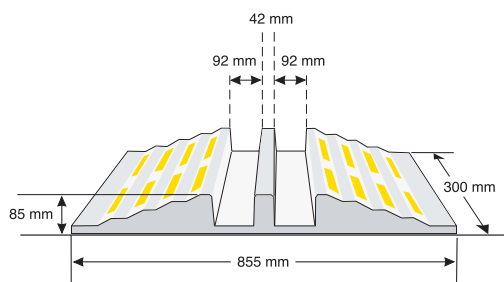

Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
855 x 300 x 85	8.5	279.14.327	1 / 2 days

TRAFFIC-LINE Kerb Ramps – Rubber





TRAFFIC-LINE Kerb Ramps are an effective and convenient way to allow vehicles, trolleys and wheelchairs to mount kerbs easily. Readily transportable they can be used in various locations such as warehouses, industrial plant, and by private motorists, delivery drivers, etc.

Available in two sizes to meet most applications. The ramps which include highly visible yellow reflective panels also feature channels in the base which allow for the passage of rainwater or can be used to channel cables through etc.

These ramps can also be permanently fixed through pre-formed bolt holes.

Load capacity: 40 tonnes.

- Hard rubber construction
- Suitable for trucks
- Textured surface to aid grip
- Two sizes

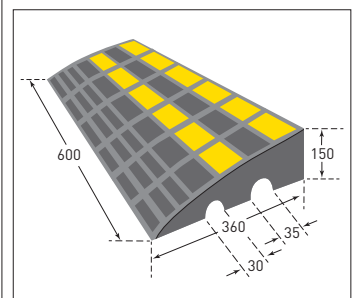

Dimensions (mm) L x D x H	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
600 x 300 x 100	black with yellow reflective panels	11	279.23.929	1 / 2 days
600 x 360 x 150		20	279.20.108	

Traffic & Pedestrian Management

TRAFFIC-LINE Hose/Cable Ramps – Reel form



Effectively manage and protect cables and hoses from drive-over damage with this product. Easily deployed – roll out – cut to length and press cable or hose into the recess – done.

Manufactured in a flexible high strength rubber mixture, it's low 30mm height affords safe and comfortable drive over. The **TRAFFIC-LINE** hose and cable protector provides a low-cost solution for the protection of hoses and cables over long distances.


Extremely strong and durable – can withstand the weight of HGV's and lift trucks.

Maximum recommended drive over speed 5 to 10mph.

- Manufactured from rubber
- Easily cut to length
- Ideal for roads and construction sites
- Cost effective

Capacity: Hoses and cables up to 20mm Ø

Dimensions: 100mm W x 10,000mm L x 30mm H



Dimensions (mm) W x L x H	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
100 x 10,000 x 30	black	21	279.26.118	1 / 2 days

TRAFFIC-LINE Cable/Hose Ramps – Small



For fast easy deployment use

TRAFFIC-LINE Cable/Hose Protection Ramps. Manufactured in recycled rubber for long service life, they are designed to protect cables/hoses from light traffic up to HGV trucks. The profiled upper surface has a ribbed anti-slip feature, whilst the bottom surface features anti-slip ribbing.

They are used in areas such as emergency services, construction sites, road works etc.

Drive over height is 65mm – recommended speed 3 – 6 mph.

Specification:


Size (mm): 1,200 L x 210 W x 65 H

Material: Recycled rubber

Colours: Black, Yellow

- Easy and quick to deploy
- Tough flexible materials
- High visibility with alternating Black/Yellow sections
- Protect cables/hoses up to 40mm Ø

Channels: 3 Channels – 1 x 45mm
2 x 20mm

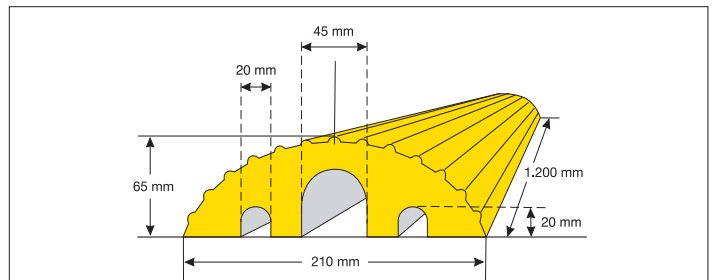

Dimensions (mm) L x W x H	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
210 x 1,200 x 65	yellow	12.8	279.28.720	1 / 2 days
	black		279.21.784	

TRAFFIC-LINE Cable/Hose Protection Ramps – 2 Channel



The **TRAFFIC-LINE Cable/Hose Protection Ramp** provides protection to cables and hoses from damage by vehicles and pedestrians. Providing provision for two cable/hoses up to 32mm Diam. this product is not suitable for use with high point load traffic, but will withstand maximum load per axle of 12 tonnes.

Manufactured in hard rubber, complete with yellow high quality polypropylene lid featuring an anti-slip surface, enabling easy top loading of cable/hoses. Each element is easily attached to its neighbour by means of interlocking tabs. This product is designed for temporary installation, not for permanent fitting. Ideal for use in road works, emergency works, construction sites etc.


Specification:

Size:
Centre section: 1,000mm L x 250mm B x 50mm H
Channels: 2 each 32mm W x 34mm H
Material – Body: Hard rubber
Material – Cover: Polypropylene
Colour: Body-Black
Lid-Yellow

- Easily & Quickly deployed
- 2 top loading channels
- Interlocking design
- Protective yellow lid
- Suitable for traffic up to HGV's

Note: Length shown is overall and includes fixing lugs. Net length is 970mm.

We recommend that appropriate warning signs are used with this product. Recommended speed 5mph.

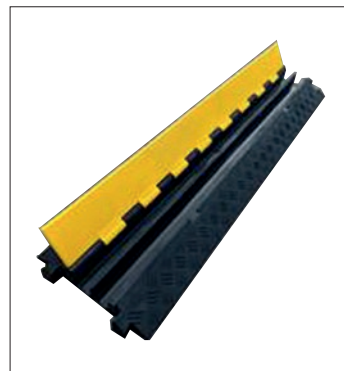

Dimension (mm) L x B x H	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
970 x 250 x 50	black/yellow	4	279.88.410	1 / 2 days

TRAFFIC-LINE Cable/Hose Protection Ramps – 5 Channel



The **TRAFFIC-LINE Cable/Hose Protection Ramp** provides protection to cables and hoses from damage by vehicles and pedestrians. Designed to withstand passenger and HGV traffic, but not suitable for high point load traffic. Withstands a maximum axle load of 8 tonnes.

Manufactured from a special vulcanised rubber compound, complete with a yellow high quality polypropylene hinged lid featuring an anti-slip surface, enabling easy top loading of cables/hoses. Each element has interlocking tabs, and can be permanently fixed via moulded in anchor bolt recesses. (Anchor bolts supplied separately).

Ideal for use in construction sites, distribution depots, emergency works, road works etc.

Specification:


Size:
Centre section: 930mm L x 500mm B x 50mm H
Channels: 5 each 38mm W x 35mm H
Material – Body: Hard rubber
Material – Cover: Polypropylene

- Easily and quickly deployed
- 5 top loading channels for cables/hoses
- Interlocking design feature
- With protective lid and carrying handle
- Suitable for traffic up to HGV's (Max. axle load 8t)

Colour: Body-Black
Cover-Yellow

Note: Length shown is overall and includes fixing lugs. Net length is 900mm.

We recommend that appropriate warning signs are used with this product. Recommended speed 5mph.


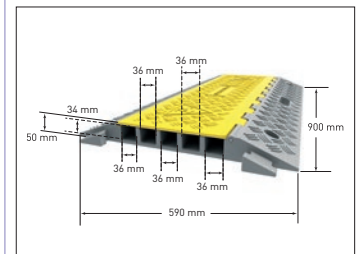


Description	Dimension (mm) L x B x H	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Centre section	590x930x50	black/yellow	18	279.29.623	1 / 2 days
45° angle (left)	590x570/ 135x50	black/yellow	9	279.23.599	
45° angle (right)				279.24.283	
End section (male)	590x190x50	black	4,5	279.28.531	
End section (female)				279.21.828	

Traffic & Pedestrian Management



- Quickly and easily deployed
- Interlocking design feature
- Strong robust construction
- Anti-slip hinged top cover

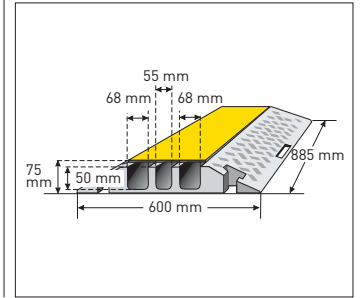

TRAFFIC-LINE Cable/Hose Protection Ramps – 3 Channel

Drive over cables, hoses and pipes without causing them harm. The **TRAFFIC-LINE** Cable/Hose Ramp is produced in a hard wearing combination of rubber and polyethylene (PE). It has non-slip surface features and includes 3 cable/hose channels. The PE lid is hinged so that the cables/hoses can be easily laid into the body of the ramp, whilst the lid, moulded in bright yellow PE, has a highly effective signalling effect.

They are widely used on construction sites, distribution depots, emergency works, road works etc.

The ramp is suitable for HGV use having been tested to take 10 tonne axle weight.





Drive over height is 75mm – recommended speed 3 – 5 mph.

We recommend that appropriate warning signs are used with this product.

Specification:

Size (mm):
Centre section: 600 L x 960 W* x 75 H
*Net width 885mm
45° angle: 600 L x
500/200 W x 75 H
End section: 283 L x 600 W x 75 H
Channels: 3 See drawing for sizes.

Material:
Body: Hard rubber
Cover: Polyethylene (PE)

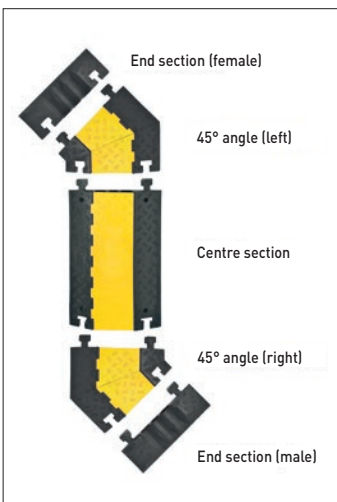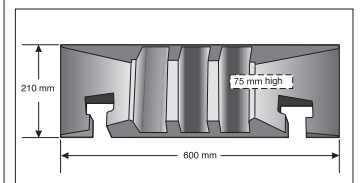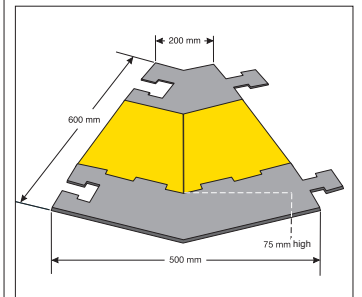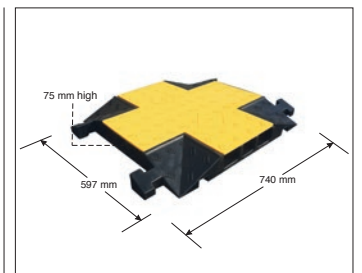

Description	Dimension (mm) L x W x H	Colour	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Centre section	600 x 960 x 75	black/yellow	26,5	279.23.799	1 / 2 days
Cross-over section NEW!	597 x 740 x 75	black/yellow	17	279.24.311	
45° angle (left)	600 x 500/200 x 75	black/yellow	12	279.29.848	
45° angle (right)				279.26.562	
End section (female)	600 x 230 x 75	black	3	279.22.899	
End section (male)	600 x 210 x 75			279.20.233	

TRAFFIC-LINE Wheelchair ramps for cable/hose ramps



Sturdy wheelchair ramps moulded in recycled rubber, for easy and quick installation on **TRAFFIC-LINE** 2-channel, 3-channel and 5-channel cable/hose ramps (see pages 123 & 124). Enables wheelchair users to cross cable bridges comfortably and safely. The anti-slip surface and profile of the wheelchair ramp guarantees reliable grip. Cables and hoses are fully protected.

The ramps also make cable/hose ramps easily crossable for wheeled walkers, prams, carts, etc. Load capacity 200 kg.

An essential accessory for organisers of festivals, events or any other situations where hoses/cables are protected by hose/cable ramps,

- No fixings required: simply place the elements along the long edges of the cable bridge.
- The cable/hose ramp cover can still be opened.
- 880 mm wide for extra safety and comfort.



Each kit includes 2 ramps.

- Simply install anywhere along the cable/hose ramp run
- Easily installed and uninstalled
- Anti-slip surface
- Carrying handles incorporated

Specification:

Dimensions (1 ramp): 744 x 440 x 75mm
 Colour: Blue
 Material: Recycled plastic
 Weight: 8kg

The wheelchair ramps are **not** designed to carry motor vehicles.



Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
744 x 880 x 75	17	279.25.942	5 / 10 days

TRAFFIC-LINE Parking Aids



Parking Bay Markers

An invaluable method of highlighting parking spaces, they are ideal for use in business or public car-parks, underground car-parks, indicating restricted areas etc.

Manufactured from recycled rubber they are supplied in either black or red/brown options, both with white retro-reflective panels.

Fixing bolts for concrete or asphalt are included. Optionally they can be secured with a commercial adhesive.

- Easily installed with bolts supplied
- Defines parking bays
- Reflective strips incorporated
- Made from recycled rubber
- Reduces joy-riding activity



Colour	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red/brown	1,200 x 150 x 45	8.5	287.27.076	5 / 10 days
black			287.22.556	

Traffic & Pedestrian Management

Wheel Stops




Reduces the risk of damage from vehicle overruns, they protect glass fronted buildings and are used in car-parks surface and multi-story, showrooms etc.

Manufactured from recycled rubber they are supplied in either black or red/brown options, both with white retro-reflective panels.

Fixing bolts for concrete or asphalt are included. Optionally they can be secured with a commercial adhesive.

- Protects buildings.
- Easily installed with bolts supplied.
- Defines end of parking bay.
- Made from recycled rubber.



TRAFFIC-LINE Heavy Duty Wheel Stops



The **TRAFFIC-LINE** Heavy duty wheel stops are essential for controlling the parking of HGV's, trucks, coaches etc. They assist in the protection from damage to buildings, vehicles etc. Manufactured from recycled rubber they are tough and durable, and are designed to withstand many years of use.


Easily fixed in location with five bolts (supplied) they come with drainage holes and cable channel (up to 20mmØ) moulded in. A bright yellow band across the top ridge allows for good visibility.

Ideal for use in warehouse and distribution locations, ferry ports, coach parks etc.

All fixtures supplied for fixing into concrete or tarmac.

- Moulded from recycled rubber
- Easily installed
- For HGV's etc.
- Drainage & Cable channels
- Hi-vis yellow markings

Can be glued down (please ask for details).

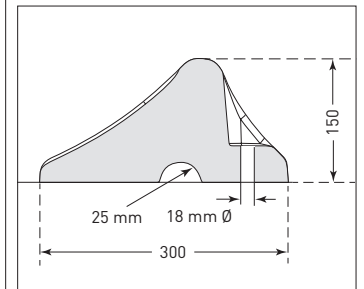

Colour	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red/brown	750 x 120 x 90	6.5	287.26.302	5 / 10 days
black			287.20.816	

Colour	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
black	1,000 x 300 x 150	26.5	284.29.405	5 / 10 days

Park-It Wheel Stop



The **Park-It** Wheel Stop is an effective method of preventing parking overruns. Manufactured from highly compressed recycled rubber they are extremely durable. With reflective markings on all sides they are highly visible from all angles, additionally **Park-It** Wheel Stops are oil, temperature and UV resistant.

These wheel stops are adaptable to meet many requirements, among them being car-parks, glass fronted buildings, showrooms, they can also be used to separate traffic routes e.g. bicycle and pedestrian paths, vehicular traffic and pedestrian routes etc.


Colour:

Black with yellow or white reflective panels.
Brick-red or blue with white reflective panels.

- Easily and quickly installed
- Highly visible reflective markings
- Oil, heat and UV resistant
- Fixings for concrete included

Fixing:

For fixing onto concrete, tarmac, asphalt – fixing bolts included.
For fixing onto concrete upper floors of multi-story car-parks we can supply a special bonding agent that requires no drilling of the floor (see opposite).



Colour	Dimensions (mm) L x D x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
black/yellow	550 x 150 x 100	4,5	284.25.388	1 / 2 days
black/white	900 x 150 x 100	7,7	284.22.610	1 / 2 days
black/yellow			284.26.220	
blue/white			284.20.740	5 / 10 days
black/white	1,200 x 150 x 100	10,5	284.26.766	1 / 2 days
black/yellow			284.21.568	
blue/white			284.23.032	5 / 10 days
black/white	1,800 x 150 x 100	15,5	284.27.586	1 / 2 days
black/yellow			284.26.285	
blue/white			284.27.231	5 / 10 days

Park-It Wheel Stop Adhesive®



This special adhesive for bonding **Park-It** Wheel Stops onto concrete, asphalt, bitumen and epoxy coated surfaces instead of mechanical anchors. It is ideal for installing **Park-It** wheel stops in multi-story car-parks where drilling into the floor is not permissible.

Specification:

Pack: 20kg
5kg Binder
15kg Quartz sand (activator)
Colour: Dark grey RAL 7021

Coverage:

4.5kg per m² (at 3mm thick coverage)

- 2 component adhesive
- Fast curing
- Durable

TIP:

We suggest that extremely smooth polished surfaces are tested for adhesion (spread at 3mm thickness).

Pack	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
20kg Container			
5kg bonding agent 15kg quartz sand (activator)	21	284.25.975	5 / 10 days

Traffic & Pedestrian Management



- Quick and easy installation
- Permanent or temporary use
- Moulded in recycled rubber
- High visibility yellow reflective tape and 'cat eyes'
- Fixing bolts included



Easy Rider® Speed Reduction Ramp

The **Easy-Rider®** Speed Reduction Ramp is an effective and easily installed method of substantially reducing traffic speed. This is achieved over two heights 55 and 75mm respectively and a short drive over dimension of 300mm.




Easy-Rider® is manufactured from recycled rubber and has yellow reflective tape and 'cats eyes' making it highly visible. The flexible nature of the product enables it to conform to most road surfaces and it has two channels 30mm each which facilitate drainage and can accommodate cables/hoses if required.

Available in two heights:

Easy-Rider® 55
Height 55mm for speeds up to 6mph.

Easy-Rider® 75
Height 75mm for speeds up to 3mph.

We recommend that appropriate warning signs are used with this product.

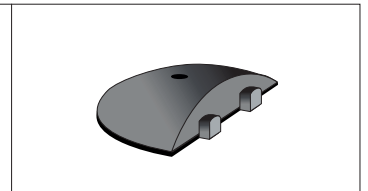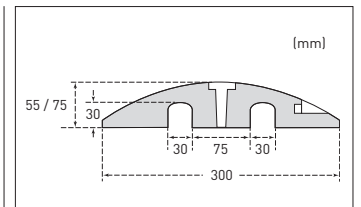

Sections	Colour	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Centre section	black/yellow	300 x 1,800 x 55	35	284.21.993	5 / 10 days
		300 x 1,800 x 75	38	284.25.570	
End caps	black	300 x 225 x 55	3	284.21.702	
		300 x 225 x 75	4	284.23.739	
Surface fixing bolts (4 per centre section, 1 per end cap) Included.		10/150	0.2	284.24.099	



- Effective, comfortable speed reduction
- Easily installed and adaptable
- Recycled rubber
- Yellow reflective panels for visibility day or night
- Textured surface for grip – even when wet
- Suitable for HGV's



SafeRide Speed Reduction Ramp

Due to the enhanced dimensions of the **SafeRide** a more comfortable crossing is achieved without sacrificing the speed reduction benefits. This is achieved with a wider drive over section that reduces the ramp angle when compared to conventional "speed ramps".

Manufactured in recycled rubber with reflective yellow markings the **SafeRide** calms traffic on business premises, airports, container ports, loading docks, entrances and exits etc.

Available in two heights:


SafeRide 50

Height 50mm for speeds up to 15 mph

SafeRide 75

Height 75mm for speeds up to 10 mph

We recommend that appropriate warning signs are used with this product

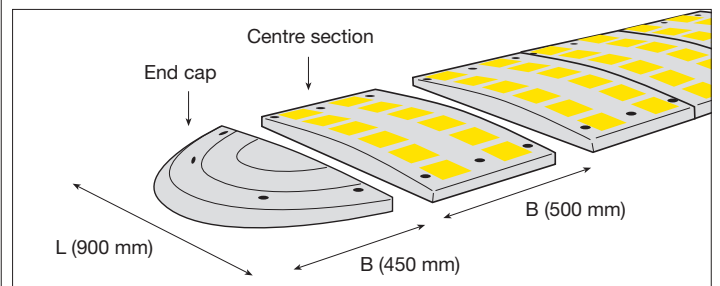

Sections	Colour	Dimensions (mm) L x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Centre sections	black/yellow	900 x 500 x 50	17	284.20.824	5 / 10 days
		900 x 500 x 75	20	284.26.552	
End cap – Male	black	900 x 450 x 50	14	284.26.082	
		900 x 450 x 75	16	284.28.854	
End cap – Female		900 x 450 x 50	14	284.25.564	
		900 x 450 x 75	16	284.22.604	
Surface fixing bolts – (6 per Centre section and 4 per End section) Included		10/100	0.2	109.22.755	



TOPSTOP-ECO *Speed Reduction Ramps*

TOPSTOP-ECO Speed Reduction Ramps are the cost effective method of reducing traffic speeds. They are supplied in three versions to reduce speeds to 5mph, 10mph and 15mph respectively and are extensively used in potentially hazardous situations such as exit and entrance ways, bends, loading bays, weigh bridges, schools, manufacturing and office sites etc.

Manufactured from recycled plastics the **TOPSTOP-ECO** is supplied in alternating yellow and black sections with 'cats eyes' incorporated into the 5RE and 10RE sections for night time visibility.

Available in three heights:

TOPSTOP-ECO 5RE
Height 70mm for speeds up to 5 mph

TOPSTOP-ECO 10RE
Height 50mm for speeds up to 10 mph


TOPSTOP-ECO 15RE
Height 30mm for speeds up to 15 mph

We recommend that appropriate warning signs are used with these products.



We recommend the use of **TOPSTOP-ECO 10RE** and **15RE** for use on public roads.

Where strong shear loads are likely, we recommend that in addition to bolting down an adhesive is used to secure each section to the road surface.

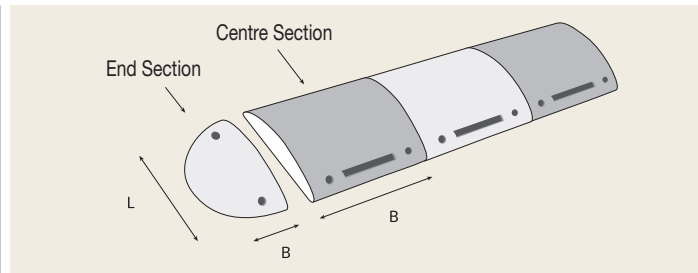

- Easily and quickly installed
- Recycled plastic
- Contrasting colours for daylight visibility
- Cost effective solution
- Sectional construction to suit site conditions

Description	Section	Colour	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
TOPSTOP-ECO 5RE	Ramp section	black	500 x 500 x 70	17	281.14.155	1 / 2 days
		yellow			281.18.436	
	End section – male	yellow	500 x 250 x 70	5.5	281.18.224	
					281.15.317	
TOPSTOP-ECO 10RE	Ramp section	black	400 x 500 x 50	9.5	281.16.415	1 / 2 days
		yellow			281.18.692	
	End section – male	yellow	400 x 200 x 50	4	281.19.480	
					281.15.466	
TOPSTOP-ECO 15RE	Ramp section	black	500 x 500 x 30	8.5	281.15.289	5 / 10 days
		yellow			281.16.941	
	End section	yellow	500 x 250 x 30	3	281.17.266	
Fixing bolts (4 per centre section – 2 per end section) Included			10/100	0.2	109.17.393	
2-Component adhesive – for attaching to surface if high shear loads are expected.			Approx. kg/sqm ²	13.4	282.18.654	5 / 10 days
				6.7	282.17.343	



TOPSTOPer Speed Reduction Bump

An extension of our Speed Ramp range which consists of two **TOPSTOP-ECO 5RE** end caps joined end to end to form a circle. They are ideal for effective speed reduction, traffic guidance, separation of traffic and non-traffic areas etc.

Manufactured from recycled plastic, and painted yellow for high visibility they are easy and quick to install.



Dimensions Ø x H (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
500 x 70	11	281.27.458	1/2 days
Fixing bolts (4 per piece) Included	0.2	109.17.393	

Traffic & Pedestrian Management



- Easily installed
- Effective speed reduction
- Surface tread ensures grip – even when wet
- Easily adjusts to site conditions
- Suitable for HGV's



TOPSTOP Speed Reduction Ramps

TOPSTOP Speed Reduction Ramps are a proven system of speed reduction in sensitive areas such as weighbridges, bends, entrances and exits to depots, road junctions, loading bays, schools, car-parks, sporting venues etc.

Manufactured from synthetic rubber in yellow and black sections with recessed 'cats eyes', **TOPSTOP** is highly visible day or night. They are easily installed using the bolts supplied. Where there is the likelihood of heavy traffic use or regular HGV use we recommend reinforcing the ramp with steel tube, which also helps in aligning the ramp.

Available in two heights:


TOPSTOP-5

Height 70mm for speeds up to 5 mph

TOPSTOP-10

Height 50mm for speeds up to 10 mph

We recommend that appropriate warning signs are used with these products.

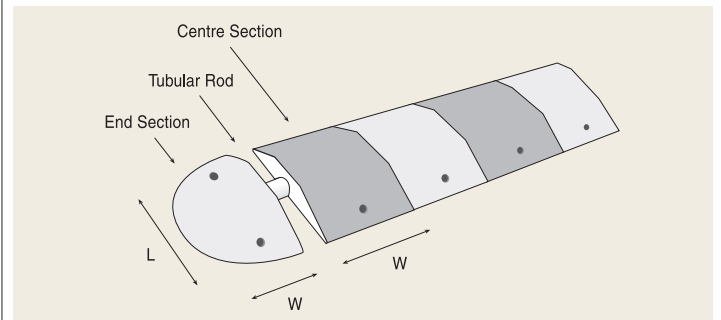

Description	Section	Colour	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
TOPSTOP-5	Ramp section	black	405 x 250 x 70	6.5	280.10.797	5 / 10 days
		yellow			280.12.597	
	End section	yellow	405 x 210 x 70	5.5	280.10.127	
Fixing bolts (2 per section) Included			10/100	0.2	109.17.393	
Reinforcing tube (Ø)			40 Ø/2 wall	4	280.10.230	
TOPSTOP-10	Ramp section	black	340 x 250 x 50	5	280.11.430	
		yellow			280.12.126	
	End section	yellow	340 x 175 x 50	3	280.12.308	
Fixing bolts (2 per section) Included			10/100	0.2	109.17.393	
Reinforcing tube (Ø)			27 Ø/2.7 wall	2	280.10.955	



- Solar powered operation
- Highly visible boom arm with red reflective bands
- All aluminium construction



COMPACT Electronic Boom Barrier

The **COMPACT** Electronic Boom Barrier provides a reliable and effective barrier for small to medium sized entrance/exit ways. The barrier is powered by a combination of internal battery and solar power. Installation is extremely simple as the unit comes pre-assembled, just bolt down in selected position and fit boom arm to the pivot post assembly. No external electrical supply is required.

The **COMPACT** Electronic Boom Barrier is the ideal barrier for private estate entrances, car-parks, building entrances and exits.

The pivot post is manufactured in aluminium finished in red and the boom arm is produced in 60mm diameter aluminium with red reflective bands for day or night visibility.



Specification:

Pivot post: 150 x 150 x 920mm H
 Base plate: 200 x 200 x 5mm
 Alu-boom arm: 60mm Ø

Operational cycles:
 Battery 6v: Up to 2,500 cycles/day (approx.)

Solar module: Additional 50 cycles/day (approx.)
 Remote control: 12m range

Manual override provided in case of emergency.

Description	Overall width (mm)	Max. drive trough width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface mount inclusive of remote control and 6 v battery	1,350	1,200	29.5	223.26.830	5 / 10 days
	1,650	1,500	30	223.21.698	
	2,150	2,000	30.5	223.24.144	
	2,650	2,500	31	223.29.795	
Accessories				Reference	
Additional remote control units				223.20.969	15 / 20 days
Additional 6v Battery				223.23.724	
Charger				223.26.644	



COMPACT *System Boom Barriers*






The **COMPACT** System Boom Barrier is designed for ease of use and built to last. The boom arm is manufactured from rectangular Aluminium section and is raised and lowered by means of gas assisted strut for smooth operation. All steel parts are Hot Dip Galvanised and powder coated red for long service life, whilst the boom arm is white with red reflective strips for high visibility day or night, and includes an 'Anti-sit' feature along the top edge.

The **COMPACT** Boom Barrier has many applications including entrances and exits to car-parks, industrial/commercial estates, offices, public buildings etc.

Versions:

With fixed support post or integrated support arm.




The pivot post is surface fixed as standard (sub-surface fix is an option on request). The locking pin of the **COMPACT** Boom Barrier automatically engages with the boom arm in both open and closed positions, and is equipped as standard with a cylinder lock including 2 keys.


Additional locking options are:
 Triangular key locking.
 Keyed alike cylinder locks.
 Customer supplied profile locks.

Dimensions:

- Pivot Post: 220 x 100 x 100mm
- Base plate: 295 x 295 x 10mm (Drilled 6 holes 13mm Ø)
- Support arm: 50 x 50 x 1,000mm H
- Base plate: 200 x 200 x 10mm (Drilled 4 holes 13mm Ø)
- Alu-Boom Arm: 90 x 60mm



- Easily installed
- Unique gas-strut assisted operation
- Strong construction
- Lockable
- Compact design



COMPACT System Boom Barrier – with Gas-Strut			With integrated support arm			With fixed support post		
Description	Overall width (mm)	Max.drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)	Delivery weight (kg/ea.)	Reference	Typical delivery time (working days)
Surface fix with Cylinder lock and 2 keys	3,320	2,900	60	222.24.949	20 days	75	222.29.410	20 days
	3,820	3,400	70	222.25.156		85	222.28.372	
	4,320	3,900	80	222.22.549		95	222.25.184	
	4,820	4,400	90	222.27.060		105	222.23.852	
	5,320	4,900	100	222.22.516		115	222.27.798	
	5,820	5,400	110	222.26.548		125	222.20.858	
	6,320	5,900	120	222.24.380		135	222.29.758	

Accessories	Reference	
Replacement triangular key	130.19.874	20 days
Pivot post for sub-surface fix (for use with pendulum support)		
Pivot and support post for sub-surface fix (for use with separate post)		
Triangular key operated lock		
Cylinder lock - Keyed alike		



COMPACT *Counterweight Boom Barrier*






The **COMPACT** Counterweight Boom Barrier is designed for ease of use and built to last. All steel parts are Hot Dip Galvanised and powder coated red for long service life, whilst the aluminium boom arm is white with red reflective strips for high visibility day or night, and includes an 'Anti-sit' feature along the top edge.

The **COMPACT** Boom Barrier has many applications including entrances and exits to car-parks, industrial/commercial estates, offices, public buildings etc.

Versions:

With fixed support post or integrated support arm.

The pivot post is surface fixed as standard (sub-surface fix is an option on



request). The locking pin of the **COMPACT** Boom Barrier automatically engages with the boom arm in both open and closed positions, and is equipped as standard with a cylinder lock including 2 keys.

Additional locking options are:

Triangular key locking.

Keyed alike cylinder locks.

Customer supplied profile locks.

Dimensions:


Pivot Post: 220 x 100 x 100mm

Base plate: 295 x 295 x 10mm
(Drilled 6 holes 13mm Ø)


Support arm: 50 x 50 x 1,000mm H

Base plate: 200 x 200 x 10mm
(Drilled 4 holes 13mm Ø)

Alu-Boom Arm: 90 x 60mm



- Easily installed
- Smooth counterweight action
- Strong construction
- Lockable
- Clean modern design

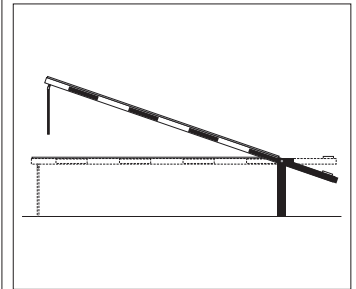

	Overall width (mm)	With integrated support arm			Typical delivery time (working days)	With fixed support post			Typical delivery time (working days)
		Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference		Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	
Surface fix with Cylinder lock and keys	3,000	1,895	75	226.24.283	20 days	-	-	-	20 days
	3,500	2,395	85	226.23.453		-	-	-	
	4,000	2,895	95	226.20.211		2,895	110	226.29.274	
	4,500	3,395	105	226.23.358		3,395	125	226.25.650	
	5,000	3,895	115	226.26.559		3,895	135	226.29.856	
	5,500	4,395	125	226.20.445		4,395	145	226.27.529	
	6,000	4,895	135	226.26.388		4,895	155	226.25.934	
	6,500	5,395	145	226.28.093		5,395	165	226.24.133	
	7,000	5,895	155	226.23.827	5,895	175	226.28.401		

Accessories	Reference	
Replacement triangular key	130.19.874	20 days
Pivot post for sub-surface fix (for use with pendulum support)		
Pivot and support post for sub-surface fix (for use with separate post)		
Triangular key operated lock		
Cylinder lock - Keyed alike		

Access Control



- Highly visible – day or night
- All steel work galvanised and powder coated
- Lockable – open or closed
- Gas damper for smooth operation
- Surface or sub-surface options





COMPACT Junior Boom Barrier – Gas-damper action

The **COMPACT** Boom Barrier is especially suitable for narrow to medium width entrances. Thanks to the use of a rectangular section aluminium boom arm this barrier makes a strong statement. The operating action is especially smooth due to the incorporated gas damper.

Applications include narrow to medium width entrances and exits to car-parks, underground garages, buildings, sites etc.

Strongly manufactured in Hot Dip Galvanised steel and powder coated red the **COMPACT** Boom Barrier offers a long service life. The boom arm is aluminium section finished in white with red retro reflective panels and incorporates an 'Anti-sit' feature. The standard pivot post is for surface fixing (sub-surface fix is available – please ask for details). Locking in either open or closed position

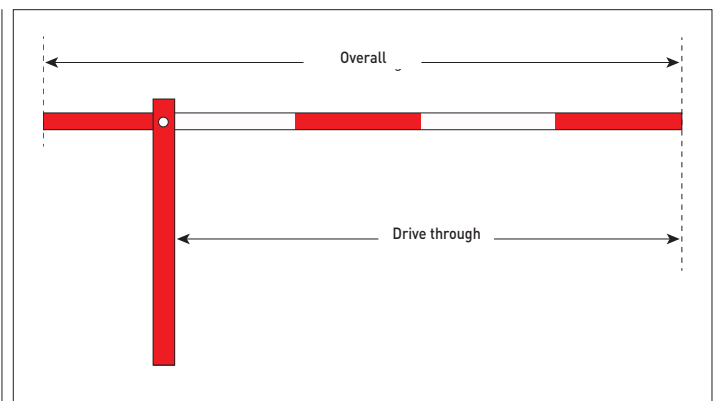

is achieved via a profile cylinder lock as standard with 2 keys.

- Optional locking methods:
- Triangular key lock.
 - Profile cylinder lock keyed differently.
 - Customer supplied profile cylinder lock.

Specification:

- Pivot post: 100 x 100 x 1,000mm H
- Base plate: 200 x 200 x 10mm (Drilled 4 holes 13mm Ø)
- Alu-boom arm: 90 x 60mm
- Maximum length: 4,500mm (from 3,500mm with pendulum support)

Description	Overall width (mm)	Max. drive trough width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface Fix Profile cylinder lock with 2 keys	2.500	1.720	45	224.29.696	20 days
	3.000	2.220	50	224.22.401	
	3.500	2.720	55	224.20.095	
	4.000	3.220	60	224.28.826	
	4.500	3.720	65	224.29.890	

Accessories			
Replacement triangular key		130.19.874	20 days
Pivot post for sub-surface option			
Triangular key lock option replacing cylinder locks			
Cylinder lock - Keyed alike			



- Highly visible barrier arm
- All steel parts Galvanised & Powder coated
- New improved locking options
- KD construction for ease of transport



COMPACT Swing Barrier

The **COMPACT** Swing Barrier represents the new generation of swing barriers with greater functionality plus possessing both modern and visually appealing looks, which will add a greater presence to the entrances of public and commercial buildings, car-parks, sites etc.

Manufactured in steel and aluminium it is supplied complete with 2 support posts for secure location in open or closed positions. All steel parts are Hot Dip Galvanised and powder coated red, the aluminium barrier arm is rectangular in section finished in white with red reflective strips with an 'Anti-sit' feature incorporated.


The pivot post on the standard model is for surface mounting (sub-surface version available on request – please ask for details).

The standard model comes equipped with a cylinder lock with two keys and the barrier locks every 90° of rotation.


Additional locking options are:
 Triangular key locking.
 Keyed alike cylinder locks.
 Customer supplied profile locks.

Specification:

Pivot post: 100 x 100 x 1,000mm H
 Base plate: 200 x 200 x 10mm
 (Drilled 4 holes
 13mm Ø)
 Support posts: 50 x 50 x 1,000mm H
 Base plate: 200 x 200 x 10mm
 Alu-Barrier arm: 90 x 60mm
 Alu-strut: 60 x 30mm



Installation schematic



Pivot post

Description	Overall width (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
For Surface fix With two support posts; Cylinder lock with 2 keys	2,500	2,205	55	225.24.432	20 days
	3,000	2,705	60	225.24.693	
	3,500	3,205	65	225.29.755	
	4,000	3,705	70	225.29.724	
	4,500	4,205	75	225.28.929	

Accessories	Reference	Typical despatch time (working days)
Replacement triangular key	130.19.874	20 days
Pivot post for sub-surface option (per set)		
Triangular key locking operation replacing cylinder locks		
Cylinder lock - Keyed alike		

Access Control



- Highly visible barrier arms
- All steel parts Galvanised & Powder coated
- New improved locking options
- KD construction for ease of transport



COMPACT Barrier Gate

The **COMPACT** Barrier Gate represents a new generation of barriers with greater functionality plus possessing both modern and visually appealing looks, which will add a greater presence to the entrances of estates, footpaths, access ways, public areas etc. It is ideal for situations in which pedestrian or cyclist access is permissible, but where general vehicle access is not allowed.

All steel parts are Hot Dip Galvanised and powder coated red, the aluminium barrier arms are rectangular in section and finished in white with red reflective strips with an 'Anti-sit' feature incorporated.




The pivot posts on the standard models are for surface mounting (sub-surface versions available on request – please ask for details).

The standard model comes equipped with cylinder locks and two keys per post and the barrier arms lock every 90° of rotation.

Additional locking options are:
 Triangular key locking.
 Keyed alike cylinder locks.
 Customer supplied profile locks.

Specification:

- Pivot posts: 100 x 100 x 1,000mm H
- Base plates: 200 x 200 x 10mm (Drilled 4 holes 13mm Ø)
- Alu-Barrier arms: 90 x 60mm
- Alu-struts: 60 x 30mm



Description	Overall width (mm)	Max. drive trough width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
For Surface fix Barrier = 2 gates Cylinder lock with 2 keys	1,250	1,050	75	221.29.973	20 days
	1,750	1,550	90	221.22.813	
	2,250	2,050	105	221.27.418	
	2,750	2,550	120	221.21.467	
	3,250	3,050	135	221.25.404	

Accessories			
Replacement triangular key		130.19.874	20 days
Pivot post for sub-surface option (per set)			
Triangular key locking operation replacing cylinder locks			
Cylinder lock - Keyed alike (per arm)			



- 1 barrier = two gate wings
- Easy to operate
- Can be locked open or closed
- Compact design



TRAFFIC-LINE Gate Barrier

These all steel constructed gates are ideal for situations in which pedestrian or cycle access is permitted, but where general vehicle access is prohibited, such as schools, universities, bridges, footpaths, public parks etc.

Manufactured in high quality steel, they can be opened like a normal gate, allowing access to authorised vehicles. The gates open through 90° and can be locked in either open or closed positions. Locking bars can be secured with padlocks (not supplied) to prevent unauthorised operation. Standard supply is for the support posts to be embedded in concrete to a depth of 500mm. (Surface mounted option complete with fixing bolts available on request).



All steel parts are Hot Dip Galvanised and painted red, with the gate wings Hot Dip Galvanised and painted red and white.

Specification:

Pivot post: 100mm Ø
O/al height: 1,500mm
(1,000mm above surface
500mm sub-surface).

Gate wings: 60 x 30mm

(Widths over 3m have additional telescopic support).



Description	Each Gate dim. (mm)	Max. drive through width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Barrier gates One set = 2 Gates	1,380	1,250	75	221.27.337	20 days
	1,880	1,750	90	221.27.647	
	2,380	2,250	105	221.21.054	
	2,880	2,750	120	221.28.968	
	3,380	3,250	135	221.22.500	
	3,880	3,750	150	221.27.058	

Accessories		
Pivot post for surface mounting (per gate)		20 days
Red reflective strips (priced per metre)		
Galvanised finish only (on application)		20 / 25 days



COMPACT Access Height Restrictor – Fixed



Strong steel and aluminium construction ideal for restricting access to vans, commercial vehicles, caravans, motorhomes etc. to car parks, traffic lanes, etc.

Comprising of two steel posts, hot dip galvanised and painted red, and a white aluminium cross bar with red retro-reflective strips for day or night visibility. A chain suspended nudge bar is available to reduce height by a further 400mm.

Dimensions:

Support Posts: 100 x 100 x 3mm


O/all height: 3,010mm

Base plate: 295 x 295 x 10mm

Drilled 6 fixing holes
15mm Ø

Aluminium cross-bar: 105 x 60mm

Max. Headroom: 2,800mm



Widths: 3,230 to 10,230mm (above 6,000mm Cross Bar is supplied in two lengths and joined using steel insert).

Adjustable heights: 2,800mm, 2,650mm, 2,500mm, 2,350mm and 2,200mm. (Heights can be reduced further by up to 400mm with optional chain suspended nudge bar)

- Easily installed
- Restricts access
- Five integral height levels
- Strong construction

Options:

Can be supplied for permanent fixing in concrete.

We recommend that appropriate signage is used with this product.

Description	Overall width (mm)	Max. drive trough width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
For Surface fix	3,230	3,000	70	305.22.250	20 days
	4,230	4,000	75	305.27.291	
	5,230	5,000	80	305.21.734	
	6,230	6,000	90	305.22.355	
	7,230	7,000	95	305.25.927	
	8,230	8,000	100	305.23.437	
	9,230	9,000	105	305.27.712	
	10,230	10,000	110	305.27.911	

Accessories		
Root fixing adapter (2 pieces required)	222.22.548	20 days

COMPACT
Aluminium Nudge Bar

The **COMPACT** Nudge Bar is an optional accessory for the **COMPACT** Access Height Restrictor. It is manufactured in Aluminium section size 60 x 30mm, in white with red reflective strips, and reduces the height of the Access Height Restrictor by up to 400mm. Includes two 6mm galvanised steel chains and connectors.



Description	Dimensions (mm)	For widths (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Aluminium	2,000	3,000 - 5,000	8	305.21.100	20 days
	4,000	5,000 - 8,000	10	305.23.888	
	6,000	8,000 - 10,000	12	305.21.949	



COMPACT Access Height Restrictor-Pivot action



Strong steel and aluminium construction ideal for restricting access to vans, commercial vehicles, caravans, motor-homes etc. to car-parks, traffic lanes etc.

This barrier can be easily rotated to allow access for authorised over-height vehicles, emergency vehicles etc. It is lockable in open or closed positions with triangular key, optional cylinder lock or locking pin secured by padlock (padlock not supplied)

Dimensions:

Support post: 100 x 100 x 3mm
 O/all height: 2,810mm
 Base plate: 295 x 295 x 10mm
 Drilled 6 fixing holes
 15mm Ø
 Aluminium cross-bar: 105 x 60mm
 Max. Headroom: 2,650mm
 Widths: 3,205 to 5,205mm



Adjustable heights: 2,200mm, 2,350mm, 2,500mm, 2,650mm.
 (Heights can be reduced further by up to 400mm with optional chain suspended nudge bar)

- Easily installed
- Restricts access
- Allows access to authorised vehicles
- Adjustable over 4 heights
- Strong construction

Options:

Can be supplied for permanent fixing in concrete.
 Cylinder lock.
 Locking pin secured by padlock (padlock not supplied).


We recommend that appropriate signage is used with this product.

Description	Overall width (mm)	Max. drive trough width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
For Surface fix with triangular key	3,205	3,000	55	305.27.817	20 days
	3,705	3,500	60	305.22.859	
	4,205	4,000	65	305.23.208	
	4,705	4,500	70	305.22.147	
	5,205	5,000	75	305.22.810	

Accessories			
Root fixing adapter (2 pieces required)		222.22.548	20 days
Replacement triangular key		130.19.874	
Securing locking bolt with cylinder lock in place of triangular key			
Securing locking bolt with padlock in place of triangular key (padlock not supplied)			

COMPACT Aluminium Nudge Bar

The **COMPACT** Nudge Bar is an optional accessory for the **COMPACT** Access Height Restrictor. It is manufactured in Aluminium section size 60 x 30mm, in white with red reflective strips, and reduces the height of the Access Height Restrictor by up to 400mm. Includes two 6mm galvanised steel chains and connectors.



Description	Dimensions (mm)	For widths (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Aluminium	2,000	3,000 - 5,000	8	305.21.100	20 days

Access Control

TRAFFIC-LINE Height Restrictor Bar – Aluminium



The **TRAFFIC-LINE** Aluminium Height Restrictor effectively warns vehicle drivers of height restrictions such as those encountered in underpasses, multi-story car-parks, underground garages, buildings or facilities with limited height access.

Manufactured from aluminium profile with end caps, clad with retro-reflective foil (Class 1) and supplied complete with suspension chains, this product is made to last.

OPTIONS:

Retro-reflective film can be applied both sides and special sizes available on request.

- Aluminium construction
- Easily and quickly installed
- Reflective panels for high visibility day or night
- 2m L suspension chains included

Specifications:

Size: 150mm H x 20mm D
 Material: Aluminium profile
 Colour: Red/white or Black/yellow
 Type: Retro-reflective to class 1 (red/white)
 Suspension: 2m L Galvanised chain x 2



Colour	Length (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red/white	2,000	6	302.15.082	5 / 10 days
	2,500	7	302.16.975	
	3,000	11	302.18.457	
	4,000	13	302.13.245	
	5,000	15	302.15.125	
black/yellow	2,000	6	302.16.017	
	2,500	7	302.16.495	
	3,000	11	302.17.584	
	4,000	13	302.13.360	
	5,000	15	302.19.951	

TRAFFIC-LINE Height Restrictor Bar – Plastic



The **TRAFFIC-LINE** Plastic Height Restrictor Bar safely and effectively warns drivers of restricted height conditions ahead without damaging vehicles. They can be utilised for both temporary and permanent installations quickly and easily.

They are ideal for installations in buildings or facilities with restricted height clearance such as car-parks, warehouses, construction sites etc.


Specifications:

Posts: 950mm L x 100mm Ø
 Material: Polyethylene (PE)
 Colour: Red/white, black/yellow
 Type: Retro-reflective
 Suspension: 2m L Galvanised chains x 2

- Easily installed
- No sharp edges
- Retro-reflective for day or night visibility
- 2m suspension chains

Options:

Can be suspended side by side (Dependant on clearance room).

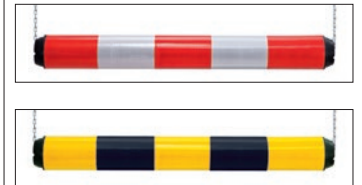

Colour	Dimensions (mm) W x Ø	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
red/white	950 x 100	2,7	302.24.997	1 / 2 days
black/yellow			302.22.967	



- Stylish practical design
- Steel core for added stability
- 100 recycled rubber
- Two head styles

THE BERKELEY Recycled Bollard

THE BERKELEY Recycled Rubber Bollard is a strong yet yielding bollard reducing the risk of damage to vehicles etc. making it ideal for use in car parks, schools, play areas etc.

Manufactured from recycled rubber the **BERKELEY** bollard is produced in two head styles – pyramid shape and 45° slope. They are reinforced with a steel core and are supplied with reflective strips for night visibility. They can, on request, be equipped with circular signs with standard symbols or to your design.

Installation method	Model/ Colour	O/all Height (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Sub-Surface Fix – Permanent 700mm Above surface 300mm Below surface	Pyramid black	1,000	22	162.21.675	1 / 2 days
	Mitre black			162.27.092	
Sub-Surface Fix – Permanent 1,000mm Above surface 300mm Below surface	Pyramid black	1,300	23	162.28.524	
	Mitre black			162.26.571	
Circular signs on request					10 / 15 days

Street Furniture



- Easily installed
- Four fixing options
- Choice of four diameters
- Stylish brushed finish
- Polished cap



CHICHESTER Stainless Steel Bollards

The **CHICHESTER** range of Stainless Steel Bollards are manufactured from brushed stainless steel with polished top caps, ensuring a high quality finish for many years, and are to be found in use around public & commercial buildings, retail parks, business parks, schools, public spaces, supermarkets etc.

Produced in seamless 304 quality stainless steel for durability they can be supplied with chain eyes (our Stainless Steel Chain is ideal for use with the **CHICHESTER** – see page 78). Please advise if installation is on a coastal site so that the appropriate grade can be supplied.

Optional extras:
For that finishing touch matching stainless steel collars are available for 60 and 76mm Ø models.



Installation method and height	Ø x Wall thickness (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Sub-Surface Fix - Permanent 900mm Above surface 300mm Below surface	60 x 2	7	167.18.689	15 / 20 days
	76 x 2	9	167.17.883	
	101 x 2	10	167.50.816	5 / 10 days
	114 x 2	12	167.50.320	
Surface Fix 900 Above surface	60 x 2	6	167.18.490	15 / 20 days
	76 x 2	8	167.16.483	
	101 x 2	10	167.50.262	5 / 10 days
	114 x 2	12	167.50.390	
Removable – with Triangular key (complete with ground socket) 900mm Above surface 300mm Below surface	60 x 2	7.5	167.18.736	15 / 20 days
	76 x 2	9	167.18.723	
	108 x 2	10.5	167.13.750	
Removable – with Cylinder lock (complete with ground socket) 900mm Above surface 300mm Below surface	76 x 2	9	167.14.189	15 / 20 days
	108 x 2	10.5	167.15.768	
Removable – with Padlock (not supplied) Complete with ground socket (galvanised) 900mm Above surface 300mm Below surface	101 x 2	12	167.50.450	5 / 10 days
	114 x 2	14	167.50.162	
Removable – with Padlock (not supplied) Complete with ground socket (Stainless Steel) 900mm Above surface 300mm Below surface	101 x 2	12	167.50.711	5 / 10 days
	114 x 2	14	167.50.695	
Ground Collars – Stainless Steel	60	0.3	167.14.049	15 / 20 days
	76	0.4	167.18.323	
Triangular key – please order separately		0.2	130.12.326	1 / 2 days
Surface fixing bolts 8/100 (3 required per post-surface fix type)		0.2	109.17.393	15 / 20 days
Chain eyes – please ask for details				15 / 20 days



- Easily installed
- Choice of two diameters
- Three fixing options
- Stylish brushed finish
- Polished 45° cap



CHICHESTER 45 Stainless Steel Bollards

The **CHICHESTER 45** range of Stainless Steel Bollards are manufactured from seamless brushed 304 quality stainless steel with an attractive 45° polished cap for that extra styling touch. As with the **CHICHESTER** range please advise if the

installation is on a coastal location so that we can select the correct grade of stainless steel.

Produced in two diameters and three fixing methods to suit a wide range of requirements.

Installation method and height	Ø x Wall thickness (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Sub-Surface Fix - Permanent 900mm Above surface 300mm Below surface	101 x 2	10	167.50.731	15 / 20 days
	114 x 2	12	167.50.195	
Surface Fix 900 Above surface	101 x 2	10	167.50.236	
	114 x 2	12	167.50.575	
Removable – with Padlock (not supplied) Complete with ground socket (Galvanised) 900mm Above surface 300mm Below surface	101 x 2	10	167.50.125	
	114 x 2	12	167.50.391	
Removable – with Padlock (not supplied) Complete with ground socket (Stainless Steel) 900mm Above surface 300mm Below surface	101 x 2	10	167.50.432	
	114 x 2	12	167.50.551	
Surface fixing bolts 8/100 (3 required per post-surface fix type)		0.2	109.17.393	1 / 2 days

Stainless Steel

Railing Systems



- Strong steel posts and rails
- Hot dip galvanised for durability
- Easily installed
- Three options Surface fix, Subsurface fix and Removable
- Two designs – URBAN and CLASSIC



TRAFFIC-LINE Railing Systems



A versatile modular railing system that is highly adaptable and extremely easy to install. Due to the modular design this system is particularly suited for uneven terrain.

Use **TRAFFIC-LINE** Railing Systems to form protected pedestrian pathways, segregate traffic lanes, barriers, queue lines etc.

Two Designs:
URBAN and CLASSIC

Components:
Steel posts include either URBAN or CLASSIC caps and lateral rails include non-conductive reinforced plastic brackets with stainless steel clamping screws. All posts are 1,000mm above ground to comply with Workplace Directives.

Brackets are adjustable horizontally to any angle above 90° and vertically (gradient) up to 45°.

Finish:
Hot Dip Galvanised or Hot Dip Galvanised and Painted.




Installation:
Sub-surface fix.
Surface fix with base plate.
Removable – Non-locking ground socket.

For less visual impact 48mm Ø lateral rails are available.


Included in the price are the post caps and brackets.

Options:
Special heights, lengths, colours – on request.


For marine and coastal locations special treatment is recommended. Please ask for details.

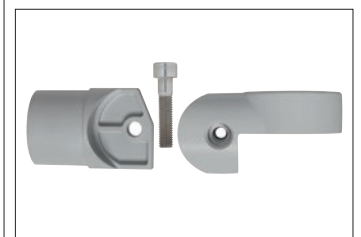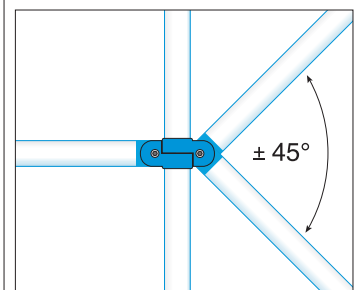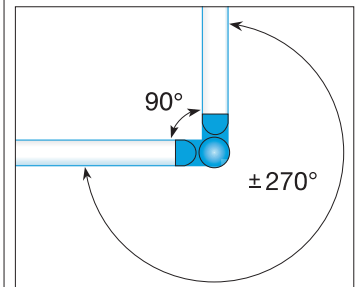

TRAFFIC-LINE Railing System – URBAN Steel Post with Cap – 2.0mm Wall thickness

	Finish	Colour	Sub-Surface Fix 60 x 1,330mm, 330mm Sub-surface or removable using ground socket			Surface Fix 60 x 1,000mm with base plate 140 x 160 x 10mm		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	Hot dip galvanised	zinc/grey	5,5	191.10.257	15 / 20 days	6,5	191.11.788	15 / 20 days
	Hot dip galvanised and painted	red/white		191.12.087			191.10.373	
		black/yellow		191.11.064			191.11.070	
Non-lockable sub-surface socket						3,0	100.10.773	15 / 20 days
Cast iron sub-surface socket with clamping bolt						5,5	150.18.049	

TRAFFIC-LINE Railing System – CLASSIC Steel Post with Cap – 2.0mm Wall thickness

	Finish	Colour	Sub-Surface Fix 60 x 1,330mm, 330mm Sub-surface or removable using ground socket			Surface Fix 60 x 1,000mm with base plate 140 x 160 x 10mm		
			Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	Hot dip galvanised	zinc/grey	5,5	191.10.603	15 / 20 days	6,5	191.10.815	15 / 20 days
	Hot dip galvanised and painted	red/white		191.11.532			191.11.756	
		black/yellow		191.12.494			191.12.711	
Non-lockable sub-surface socket						3,0	100.10.773	15 / 20 days
Cast iron sub-surface socket with clamping bolt						5,5	150.18.049	

Lateral Railing 60mm Ø with Brackets – 2.0mm Wall thickness

Finish	Colour	1,000 mm; Actual 1,170 +/- 5 mm			1,500 mm; Actual 1,670 +/- 5 mm			2,000 mm; Actual 2,170 +/- 5 mm		
		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot dip galvanised	zinc/grey	5,5	191.11.348	15 / 20 days	7	191.11.891	8,5	191.13.077	15 / 20 days	
Hot dip galvanised and painted	red/white		191.12.964			191.11.746		191.11.603		
	black/yellow		191.10.311			191.11.722		191.10.789		

Lateral Railing 48mm Ø with Brackets – 2.0mm Wall thickness

Finish	Colour	1,000mm; Actual 1,170 +/- 5 mm			1,500mm; Actual 1,670 +/- 5 mm			2,000mm; Actual 2,170 +/- 5 mm		
		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot dip galvanised	zinc/grey	4,5	191.17.798	15 / 20 days	6	191.14.415	7,5	191.16.639	15 / 20 days	
Hot dip galvanised and painted	red/white		191.17.857			191.16.468		191.19.773		
	black/yellow		191.14.802			191.19.929		191.13.934		

Railing Systems



- Stainless Steel Posts and Rails
- Easily installed
- Two options – Surface fix and Sub-surface fix
- Two designs – URBAN and CLASSIC
- Flexible modular design

TRAFFIC-LINE Stainless Steel Railing Systems

Manufactured in Stainless Steel these railings feature all of the attributes of **TRAFFIC-LINE** Railing System, but with the added visual appeal of Stainless Steel.

TRAFFIC-LINE Stainless Steel Railings are installed where visual appeal or difficult conditions are paramount e.g. areas of pollution, chemical works, public buildings, traffic areas, safety rails for paths, stations, airports etc.

Two Designs:
URBAN and CLASSIC.

Components:
Stainless Steel posts include either URBAN or CLASSIC caps and lateral rails include Aluminium brackets with stainless steel clamping screws. All posts are 1,000mm above ground to comply with Workplace Directives.

Brackets are adjustable horizontally to any angle above 90° and vertically (gradient) up to 45°.

Finish:
Posts and Rails: 304 Stainless Steel
Caps and Brackets: Aluminium
Blue RAL 5017

Installation:
Sub-surface fix.
Surface fix with base plate


Included in the price are the post caps and brackets.


Options:
Special heights, lengths, colours for post caps and brackets – on request.

For marine and coastal locations 316 Grade is recommended and special treatment for post caps and brackets. Please ask for details.



Stainless
Steel

TRAFFIC-LINE Stainless Steel Railing System – URBAN Steel Post with Cap – 2.0mm Wall thickness							
	Cap Colour	Sub-Surface Fix 60/1,330mm (330mm Sub-surface)			Surface Fix 60/1,000mm; With base plate 140 x 160 x 10mm		
		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	Blue (RAL 5017)	5.5	193.14.227	15 / 20 days	5.5	193.15.715	15 / 20 days

TRAFFIC-LINE Stainless Steel Railing System – CLASSIC Steel Post with Cap – 2.0mm Wall thickness							
	Cap Colour	Sub-Surface Fix 60/1,330mm (330mm Sub-surface)			Surface Fix 60/1,000mm; With base plate 140 x 160 x 10mm		
		Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
	Blue (RAL 5017)	5.5	193.13.650	15 / 20 days	5.5	193.17.232	15 / 20 days

Lateral Stainless Steel Railing 60mm Ø with Brackets – 2.0mm Wall thickness									
Connector colour	2,000mm; Actual 2,170 +/- 5mm			1,500mm; Actual 1,670 +/- 5mm			1,000mm; Actual 1,170 +/- 5mm		
	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Blue (RAL 5017)	8.5	193.18.593	15 / 20 days	7	193.13.684	15 / 20 days	5.5	193.16.166	15 / 20 days

Scooter Parking

Scooter-Parker for 2 scooters



Elegant yet strong and practical scooter parking stand for 2 scooters, manufactured in high grade steel. Ideal for parking places in front of public buildings, institutions and companies. Enhances the street scene.

Plastic-coated holding clamps prevent scratching of handlebars. Holding clamps adjustable in height from 150 - 690mm to suit various scooter models.

Scooters can be secured to stand with chain or cable lock. (not provided) Alternatively with padlock with up to 18mm hasp. (not provided).

Specification:

- Post: 800 x 80 x 80mm
- Base plate: 200 x 200 x 10mm (Surface fix only)
- Wall thickness: 3mm
- Ø of holding clamps (closed): internal: 60mm external: 120mm
- Clamp colour: black


- Elegant, modern design
- Holding clamps adjustable in height
- With slots for chain or cable lock
- For (electric) scooters

Finish:

- Hot Dip Galvanised and Powder coated in anthracite iron mica coating (DB 703)

Installation:

- Surface fix (4 bolts per post)
- Sub-surface fix

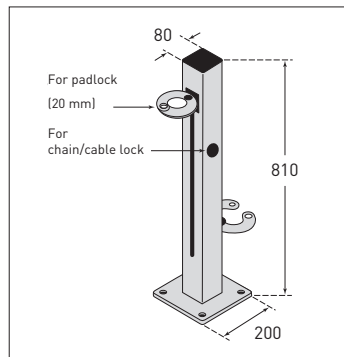

Installation	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Surface fix	810 x 80 x 80	12	171.23.074	5/10 days
Sub-surface fix	200 x 200 x 10 330 mm long	5	171.24.858	

Scooter parking stand for 5 scooters



Elegant yet sturdy parking stand for 5 scooters, made from formed flat steel. For parking at both sides Unobtrusive, elegant design. Enhances the streetscape.

Scooters can be secured to stand with chain or cable lock.

Specification:

- Height: 400 mm
- Material: flat steel, 70 x 10 mm
- Ø of holding clamps (closed): inside 60 mm outside 120 mm


Surface finish:

- Hot Dip Galvanised and Powder coated in anthracite iron mica coating (DB703)

Installation:

- Surface fix

- Made from formed flat steel
- Contemporary design
- For parking on both sides
- For (electric) scooters

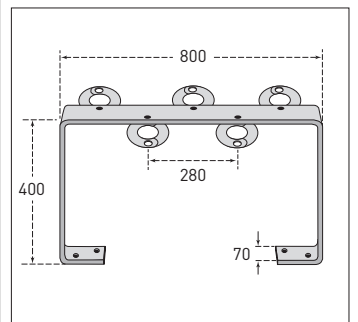

Finish	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot dip galvanised	400 x 800 x 70	12	171.20.144	5/10 days
Hot dip galvanised + DB703			171.29.011	



- Formed from flat steel section
- Contemporary design
- Suitable for bicycles and scooters
- Enables parking on both sides



CITY GILA Bicycle Stand

Well-designed, sturdy bicycle stand manufactured from formed flat steel. Also available with cross bar (see version 2).

The clean modernistic lines are both practical and enhance the street scene.

Specification:

Height: 800 mm
Material: flat steel section
Dimensions: 70 x 10mm

Version 3: With special plastic-coated holding clamps for 5 scooters located on cross bar

Scooters can be secured to stand with chain or cable lock. (not provided)
Suitable for both non-electric and electric scooters.

Alternatively with padlock with up to 18mm hasp. (not provided)

Specification:


As version 2
Ø of holding clamps (closed):
internal: 60mm
external: 120mm
Clamp colour: black

Finish:

- Hot Dip Galvanised
- Hot-Dip Galvanised and Powder coated in anthracite iron mica (DB 703)

Installation:

- Surface fix (four bolts per stand)

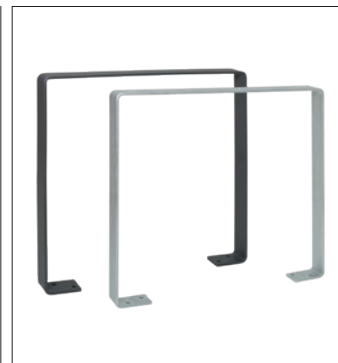


Version 1



Version 2



Version 3

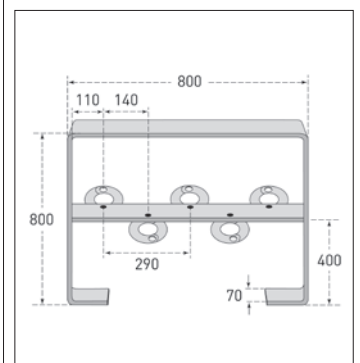

Version	Finish	Dimensions (mm) L x W x H	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Version 1	Hot dip galvanised	800 x 800 x 70	16	171.21.659	5/10 days
	Hot dip galvanised + DB703			171.23.908	
Version 2	Hot dip galvanised		21	171.29.548	
	Hot dip galvanised + DB703			171.23.534	
Set of Clamps (for 5 Scooters) black, for version 3	black		2	171.20.463	

Bicycle Parking

CITY COPPA Bicycle Stand



The **CITY COPPA** Bicycle stand is of a contemporary design which will complement it's surrounding environment, yet at the same time provides a functional method of bicycle parking and securing. The **CITY COPPA** is available in two finishes and can be surface fixed or sub-surface fixed.

Strongly constructed from rectangular steel tube 60 x 40mm for long-lasting service life.

Specification:

Height: 800mm
 Surface fix: 800mm
 Sub-surface fix: 1,150mm (O/all)
 Width: 700mm


Finish:

- Hot-dip Galvanised only
- Hot-dip Galvanised and Powder coated in anthracite iron mica (DB 703)

- All steel construction
- Contemporary design
- Robust and durable
- Quickly and easily installed

Installation:

- Surface fix
- Base plate size: 300 x 140 x 10mm
- Sub-surface fix



800mm Above surface 700mm width				
Finish	Installation	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot Dip Galvanised	Sub-surface fix	11,5	171.26.688	5/10 days
	Surface fix		171.21.382	
Hot Dip Galvanised + DB703	Sub-surface fix		171.22.675	
	Surface fix		171.25.337	

CITY VUELTO Bicycle Stand



The **CITY VUELTO** Bicycle stand is of a contemporary design which will complement it's surrounding environment, yet at the same time provides a functional method of bicycle parking and securing. The **CITY VUELTO** is available in two finishes and can be surface fixed or sub-surface fixed.

Strongly constructed from 48mm round steel tube for long-lasting service life.

Specification:

Height: 800mm
 Surface fix: 800mm
 Sub-surface fix: 1,130mm (O/all)
 Width: 700mm


Finish:

- Hot-dip Galvanised only
- Hot-dip Galvanised and Powder coated in anthracite iron mica (DB 703)

- All steel construction
- Contemporary design
- Robust and durable
- Quickly and easily installed

Installation:

- Surface fix
- Base plate size: 300 x 140 x 10mm
- Sub-surface fix

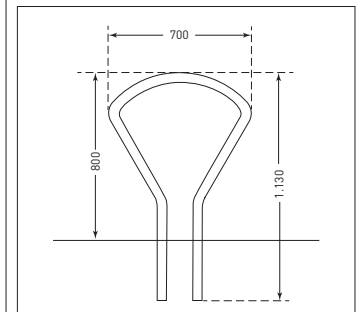

800mm Above surface 700mm width				
Finish	Installation	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot Dip Galvanised	Sub-surface fix	12,5	171.29.695	5/10 days
	Surface fix		171.22.178	
Hot Dip Galvanised + DB703	Sub-surface fix		171.29.869	
	Surface fix		171.27.913	

CITY GIRO Bicycle Stand



The **CITY GIRO** Bicycle stand is designed to blend in with its surroundings, yet provides a functional method of securing bicycles. Available in two finishes and can be sub-surface fixed or surface fixed.

Sturdily constructed in 42mmØ and 70 x 70mmØ steel tube this product will provide outstanding service.

Finish:

Hot Dip Galvanised and Powder coated in Anthracite iron mica DB 703.


Hot Dip Galvanised only

Installation:

Sub-surface fix

Surface fix

- All steel construction
- Functional design
- Robust and durable
- Easily installed



800mm Above surface x 650mm OD				
Finish	Installation	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot Dip Galvanised	Sub-surface fix	11,5	171.26.374	5/10 days
	Surface fix		171.22.579	
Hot Dip Galvanised + DB703	Sub-surface fix		171.27.900	
	Surface fix		171.22.144	

CITY TOUR Bicycle Stand



The **CITY TOUR** Bicycle stand is designed to blend in with its surroundings, yet provides a functional method of securing bicycles. Available in two finishes and can be sub-surface fixed or surface fixed.

Sturdily constructed in 48mmØ and 70 x 70mmØ steel tube this product will provide outstanding service.

Finish:

Hot Dip Galvanised and Powder coated in Anthracite iron mica DB 703.


Hot Dip Galvanised only

Installation:

Sub-surface fix

Surface fix

- All steel construction
- Functional design
- Robust and durable
- Easily installed

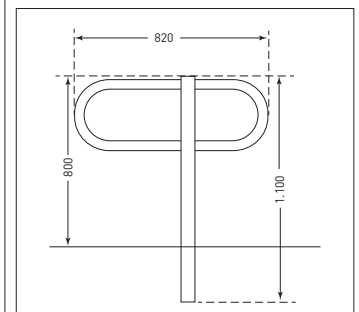

800 mm Above surface x 820mm Width				
Finish	Installation	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot Dip Galvanised	Sub-surface fix	12,5	171.21.197	5/10 days
	Surface fix		171.24.673	
Hot Dip Galvanised + DB703	Sub-surface fix		171.25.361	
	Surface fix		171.22.397	

Bicycle Parking



- All steel construction
- Two fixing options
- Easily installed
- Hot dip galvanised for long life

TRAFFIC-LINE 'Sheffield' style Bicycle Racks For 1 Bicycle

This ever popular style provides an economic, durable and effective solution to bicycle parking. Manufactured from 48mm Ø tube and hot dip galvanised to ensure a long service life. Accessible from both sides this rack is available in two options – Surface fix or Sub-surface fix.

Applications can be found in domestic storage, company cycle parks, public spaces, schools, public and commercial buildings etc.

Surface Fix – 4 Surface fixing bolts per post				
Finish	Dimensions (mm) W x H x Ø	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Hot dip galvanised	710 x 800 x 48	7	169.88.041	1 / 2 days
Sub-Surface Fix – Ragged ends				
Hot dip galvanised	710 x 1,060 x 48 (260mm Sub-surface)	6.5	169.88.045	1 / 2 days
Accessories				
Surface fixing bolts 8/100 – 4 required per Surface fix style		7	109.17.933	1 / 2 days

TRAFFIC-LINE Compact Bicycle Rack for 3, 4 or 5 bicycles



The **TRAFFIC-LINE** Compact Bicycle Rack is a medium duty bicycle rack which is supplied fully assembled. Constructed in zinc plated steel for durability with wheel locators made from 16mm Ø tube, it is suitable for mountain bike tyres up to 50mm wide. Supplied complete with fixings this bicycle rack represents great value for money.

Highly suitable for schools, domestic storage, company cycle parks, small housing estates etc.

- Zinc plated steel construction
- Accessible from both sides
- Suitable for cycle tyre widths up to 50mm
- Fully assembled
- Supplied with fixings



Dimensions 255mm High, 330mm Depth				
Bicycle capacity	Overall width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
3	720	5	169.28.632	1 / 2 days
4	1.210	7	169.15.334	
5	1.320	8	169.19.382	

TRAFFIC-LINE Wall Mounted Bicycle Rack



Individual bicycle rack units.

Adjustable through 180 degrees. Wall mounting – easily secured. Compact and flexible design. Zinc plated steel construction. Suitable for bicycles up to tyre width 50mm. Supplied with wall fixings. Fully assembled.

Applications:

Domestic, company bicycle parks, public spaces, public & commercial buildings, schools etc.

Specification:

Frame: Steel
 Size: 335mm H x 285mm D x 90mm W (1)
 16mm Ø tube wheel supports
 Finish: Zinc Plated
 Type: Assembled

- Zinc plated steel construction
- Adjustable through 180°
- Full assembled
- Wall mounting – easily secured
- Well-priced



335mm high, 285mm deep, 90mm wide				
Bicycle capacity	Overall width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
1	90	2.5	169.17.113	1 / 2 days

Bicycle Parking, Street Furniture

TRAFFIC-LINE Hi-Hoop and Lo-Hoop Bicycle Racks for 2 to 6 Bicycles



The **TRAFFIC-LINE** Hi-Hoop and Lo-Hoop Bicycle Racks are the ideal solution for heavier duty cycle storage. Manufactured in 3.5mm gauge steel, hot dip galvanised with 19mm Ø wheel locaters, a long service life is assured. The arches will accommodate 55mm wide mountain bike tyres and wheels equipped with up to 140mm diameter disc brakes.

Two Versions:

Lo-Hoop allows entry from one side only. Hi-Hoop allows entry from either side.

These bicycle racks come flat packed for easy assembly complete with fastenings and instructions.

- Strong steel construction
- Hot dip galvanised for long life
- Tyre widths up to 55mm
- Easy self-assembly



Hi-Hoop – 415mm High, 390mm Depth				
Bicycle capacity	Overall width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
2	700	9	169.13.535	1 / 2 days
3	1,050	12	169.18.628	
4	1,400	16	169.15.104	
5	1,750	20	169.14.981	
6	2,100	24	169.15.566	

Lo-Hoop – 415mm High, 550mm Depth				
Bicycle capacity	Overall width (mm)	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
2	700	11	169.19.379	1 / 2 days
3	1,050	13	169.17.164	
4	1,400	16.5	169.14.842	
5	1,750	21	169.13.432	
6	2,100	25	169.13.416	

TRAFFIC-LINE Style DS35 Stainless Steel Litter Bins



The **TRAFFIC-LINE** Stainless Steel Litter Bins are stylish and modern in appearance, complementing their surroundings. Equally at home in town or country, these litter bins offer an elegant solution to litter disposal. Manufactured in high quality stainless steel with galvanised liners and fitted with an inbuilt lock. It is ideal for installation in parks, public places, shopping centres, retail parks etc.


Manufactured in high-grade quality stainless steel the design DS35 comprises a hooped outer frame with a fixed dome canopy. The 35 litre inner bin is accessed by unlocking and tilting the outer container. The lock mechanism is operated with a triangular key. Includes drainage facility for liquids.

Installation:

Surface fix: Bolting down through two stainless base plates.

Sub-surface fix: Concreting in two ground anchors attached to base plates (accessory).

- Easily installed
- Elegant modern design
- Strong Stainless Steel construction
- Lockable

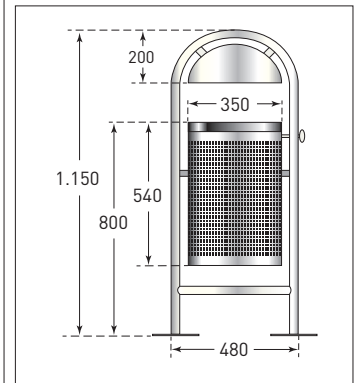

Litter Bin Style DS35	Dimensions (mm) H x W x D	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
With inner bin 35l	1.150 x 580 x 380	14	512.27.575	1 / 2 days


Accessories	Delivery weight (kg/ea.)	Reference	Typical despatch time (working days)
Root fixing adapter (2 per litter bin)	1,5	512.27.861	1 / 2 days

Product Index 2020/21	Description/Specification Page
A	
Access Height Restrictors	142-146
Acrylic Mirrors	8-10, 12-17, 19
Adjustable End Frame Protectors	52-53
Aerosol Spray Paints	60-61
Aluminium Belt Posts	85-86
Aluminium Height Restrictor Bar	146
Anti-ram Raid Bollard - Mild Steel	24
Anti-slip Indoor Floor Paint	63
Anti-slip Tapes	55-56
ANTI-VANDAL Stainless Steel Wall Mounted Mirror	18
Applicators - Line Marking Paint & Tapes	58-61
Asphalt Repair Kit	68
B	
Barrier Board Systems	113
Barriers, Boom	133-138
Barrier Chains & Accessories	77-79
Barriers - Crowd	110-111
Barrier Gates	139-141
Barriers - Extendable	109
Barrier Posts, Drop-down	98-103
Barrier Posts, Fixed	91-94
Barrier Posts, Removable	90-91, 95-97
Barrier Tape Stands & Tapes	109
Barriers - Blow Moulded HDPE	110, 112, 114
Barriers, Swing	139
Belt Barrier Posts	84-87
Belt Barrier Posts - Economy	87
Belt Barrier Posts - Permanent	86
Belt Barrier Post - 4 metre belt	85
Belt Barrier Posts - Stainless Steel	84
Belt Barrier - Cone fixing	89
Bicycle Racks	159-160
Bicycle Stands	155-158
Bins - Litter	160
BLACK BULL Collision Protection Bars Standard	26
BLACK BULL Collision Protection Bars - Raised	27
BLACK BULL Collision Protection Guards	28-29, 33-36
BLACK BULL Column Protectors - Steel	21, 23
BLACK BULL FLEX Heavy Duty Bollards	25
BLACK BULL FLEX Impact Guard Rails	37
BLACK BULL FLEX Impact Protection Railing System	44
BLACK BULL FLEX Impact Protection Railing System-Hybrid	46-47
BLACK BULL FLEX Protection Guard	32
BLACK BULL Impact Guard Rails	38-39
BLACK BULL Impact Protection Bollards	24-25
BLACK BULL MD & HD Impact Protection Railing Systems	40-43
BLACK BULL Pallet Racking Protectors	48-51
BLACK BULL Protection Guards	28-29, 33-36
BLACK BULL Racking End Frame Protectors	52-53
BLACK BULL Railing Gates - Manual & Self-closing	45
BLACK BULL Railing Gate - Hybrid System - Manual & Self-closing	48
BLACK BULL Removable Protection Guards	34
BLACK BULL Sliding Door Protection Guards	51
BLACK BULL Under-run Guards	34, 36
Blow Moulded Barriers - HDPE	110, 112, 114
Bollards-Anti-ram Raid	24
Bollards - Flexible	25
Bollards - No Waiting	105
Bollards - Recycled Rubber	147
Bollards - Heavy Duty	24-25
Bollards - Stainless Steel	148-149
Buffers - Heavy Duty	76
Buffers - Wall	74
C	
C' Profile Guard Rails	38-39
Cable/Hose ramp, 10 mtr.	122
Cable Protection Guards-Wall Mounted	22-23
Cable Protection Ramps	122-125
Car Park Barriers	98 - 103
Car Park Marking	60-61
Cartridge Belt Barrier - Standard & Magnetic Fix	88, 89
Cartridge Belt Barrier Stainless Steel	87
Chain Hook & Chain kit for Cones	106
Chain Posts & Chains	77-83
Chains	78-79
CHICHESTER Stainless Steel Bollards	148-149
CITY COPPA Bicycle stands	156
CITY GILA Scooter/Bicycle stand	155
CITY GIRO Bicycle stands	157
CITY TOUR Bicycle stands	157
CITY VUELTO Bicycle stands	156
CLASSIC Railing Systems	150-151
Coach/Truck Wheel stops	126
Collapsible Posts	82
Collapsible Signs	107
Collision Protection Bars-Straight & Corner - Standard	26
Collision Protection Bars-Straight & Corner - Raised	27
Column protection - PU Foam	76
Column protection - Steel	21, 23
COMPACT Access Height Restrictors	142-145
COMPACT Barrier Gate	140
COMPACT Boom Barriers	133-138
COMPACT Counterweight Boom Barrier	136-137
COMPACT Electronic Boom Barrier	133
COMPACT System Boom Barrier	134-135
COMPACT Swing Barrier	139
COMMANDER Drop Down Posts	100

Product Index 2020/21	Description/Specification Page
COMMANDER-PLUS Drop Down Post	102
Cone mounted barrier tape	89
Cones	104, 106
CONTROLLER Drop Down Posts	98 - 99
CONTROLLER-PLUS Drop Down Posts	101
Convex Mirrors	3-19
Corner Protection	76, 77
Corner Protection Guards	35, 36
Counterweight Boom Barrier	136-137
Crowd Barriers	110-111
Cylinder Posts, Reflective	115, 116, 117
Cylinder Posts, Reflective - with Chain Eyes	118
D	
DEFENDER Drop Down Posts	103
DETECTIVE Convex Mirror Magnetic Fix	12
DETECTIVE Mirrors	12, 14, 17
DETECTIVE-X Mirrors	12
Dome Mirrors	15-18
Drop Down Posts	98-103
DURABEL Stainless Steel Traffic Mirrors	4-7
E	
Easy Rider Speed Reduction Ramp	128
Economy Belt Barriers	87
Edge Protection	69-73
Electronic Boom Barrier	133
End Frame Protectors - Adjustable	52-53
Expanding Barriers	109
EXTERN Chain Stands	83
EXTERN-Plastic chain posts	82
F	
FERRO SIGNAL Chain	78-79
FLEXBack Traffic Post	117
FLEX Guard Rails	37
FLEXI-BARRIER Extendable Trellis Barrier	109
FLEXI-LIGHT BARRIER Extendable Trellis Barrier	109
Flexible Post	115-117
Flexible Post - with Chain Eyes	118
Flexible Verge Markers	117
Floor marking tape	57-59
Floor Marking Tape - HD - PVC & Steel	57
Floor Mounted Steel Hoop Guards	29-30
Floor Paint	60-64
Floor Signs	65-66
Flush Fitting Drop-down Post	102
Folding Traffic Signs	107
Fork Lift Truck Resistant Floor Marking Tapes	57
Fork Lift Truck Mirrors	14
Flourescent Traffic Cones	104, 106
Frame Post	100
G	
Gas Strut Boom Barrier	134-135, 138
Gate Barrier	140-141
Gate - Hybrid System - Self-closing	48
Gate - MD & HD Impact Railing Systems - Manual	45
Gate - MD & HD Impact Railing Systems - Self-closing	45
Ground Marking Systems	60-61, 64
Ground Socket Covers	92 - 93, 95, 97
Guard Rails	38-39
GUARDA Chain Stands	80
GUARDA-Flex Plastic Chain Posts	82
Guide Post - Suspended	119
H	
Hand Held Inspection Mirrors	19
HANDliner Paint Applicator	60-61
Hazard Warning Tape	67
HD Railing System	42-44
HD Wheel stops	126
HDPE Crowd barrier	110
HDPE Kerb ramp	120
HDPE Pedestrian barrier	112, 114
Heavy Duty Buffers	76
Heavy Duty Bollards	24-25
Height Restrictor Bar - Aluminium	146
Height Restrictor - Fixed Frame	142-143
Height Restrictor - Pivot Action	144-145
Height Restrictor Bar - Plastic	146
Hoop Guards - Floor & Vertical Surface Fix	30-31
Hoop guards-light duty	29
Hose & Cable Protection Ramps	121-124
Hump - Speed Reduction	129
Hybrid Railing System	46-47
I	
Ice/Condensation Free Mirror	6
Impact Protection - PU Foam	69-73
Impact Protection Railing System MD & HD	40-44
Impact Protection Railing System - Hybrid	46-47
Impact Protection Railing System - Flexible	44
Impact Protection - 5 metre	69
Industrial Duty Mirrors	9
Industrial Floor Coating	62-64
Inspection Mirrors	19
INSTITUTIONAL Mirrors	18
J	
Joint Repair Kit	68
K	
Kerb Ramps	120-121
L	
LADDER SENTRY Ladder Protection	108
Line Marking Paints & Tapes	58-61
Litter Bins - Stainless Steel	160

Product Index 2020/21	Description/Specification	Page
Loading Dock/Bay Buffers		76
Luminous Hazard Warning Tape		67
M		
Magnetic Fix Convex Mirror		12
Magnetic Fix Wall Belt Cartridge		88
Magnetic Impact Protection		72
Marking Systems		58-61
MD Railing System		40-41
Memory Posts		115
Mild Steel Bollards		24-25, 43,
MINDER Barrier Posts (Removable)		95 - 97
Mirror Accessories		20
Mirrors		3-19
MIRROR-MASTER Internal/Exterior Mirrors		14
M-DEKO Nylon Chain		78-79
M-FERRO SIGNAL Steel Chain		78-79
MNK Nylon Chain		78-79
M-POLY Polyethylene Chain		78-79
N		
Non-reflective Hazard Warning Tape		67
No Waiting Bollards		105
Nylon Chains		78-79
O		
Observation Mirrors		9-12, 14-18
Off-highway cones		106
Off-highway traffic posts		116-117
P		
2 metre Wide Protection Guards		28-29, 32-33
5 metre Length PU Foam Impact Protection		69
Paint - Floor Coating		62-64
Paint - Line Marking		60-61
Pallet Racking Frame Protectors		48-51
Pallet Racking Frame Protectors - Flex		50
Pallet Racking Frame Protectors-with Guide Roller		51
Pallet Rack Protector U profile - 2 Rollers		51
PANORAMIC Mirrors - Acrylic		15-17
PANORAMIC Mirrors - Acrylic - Wall Mounted		16-18
Parking Bay Aids		125-127
Park-It Wheel Stop		127
Park-It Wheel Stop - Adhesive		127
Pedestrian Safety Barriers		112, 114
Pipe protection-PU Foam		70-72
Pipe protection-Wall Mounted		22-23
Plastic Chain Posts		80, 82, 118
Plastic Chains		78-79
Plastic Height Restrictor Bar		146
Portable Barriers		109-114
Post Chains		78-79
Posts		80 - 87, 90 - 103
PROline Anti-slip Tapes		55-56
PROline HD Vinyl Floor Marking Tape		57
PROline Floor Signs		65-66
PROline-paint Anti-slip Indoor Floor Coating		63
PROline-paint Indoor Floor Coatings		62-63
PROline-paint Industrial Floor Coating		62-64
PROline-paint Line Marking Paint		60-61
PROline Marking Systems		58-61
PROline-paint Outdoor Floor Coating		64
PROline-tape Floor Marking Tapes		55-59
PROline-tape Steel Floor Marking Tape		57
Protection Bollards		24-25, 43
Protection-Corner		75
Protection Guards		28-29, 32-36
Protection Guards - 2 metre wide		28-29, 32-33
Protection Guards - Removable		34
Protection Guards XL		33, 36
R		
Racks-Bicycle		159-160
Racking End Frame Protectors - Adjustable		52-53
Racking End Frame Protectors - Adjustable - with Rollers		52-53
Racking Guards		34, 48-51, 52-53
Railing Systems		37-48, 150-152
Ramps - GRP - Light & Heavy Duty		120
Ramps - Hose & Cable Protection		121-124
Ramps - Speed Reduction		129-132
Ramps - Wheelchair - Hose/Cable ramps		125
Recycled Rubber Bollards		147
Recycled Speed Reduction Ramps		128-131
Recycled Speed Reduction Humps		129
Reflective Warning Tapes		67
Removable Barrier Post		90-93, 95 - 97
Removable Protection Guards		34
RESTORE Joint Repair Kit		68
RESTORE Surface Repair Kit		68
Road Works Signs		107
Rubber Speed Reduction Ramps		128-129, 132
S		
Safety Chains		78-79
Safety & Security Mirrors		10-19
SafeRide Speed Reduction Humps		129
S-COMPACT Observation Mirror		11
Scooter Parking stands		154-155
SEKURIT Glass Mirrors		3
Semi-automatic Drop-down Post		101
SHEFFIELD' Bicycle Stand		158
SKIPPER Cone Mounted Barrier Tape		89
Signs - Folding		107
Sliding Door Protection		51
SM STEEL Steel Chain		78-79
Speed Reduction Ramps		128-132
Speed Reduction Ramp - Easy Rider		128
Speed Reduction Humps - SafeRide		129

Product Index 2020/21	Description/Specification	Page
SPION Internal/External Mirror		10
Spring Loaded Post		94
Stacker Truck Mirrors		14
Stainless Steel Belt Posts		84
Stainless Steel Bollards		148-149
Stainless Steel Chain		78-79
Stainless Steel Litter Bins		160
Stainless Steel Mirrors		4-7
Stainless Steel Railings		152-153
Stands-Chain		80-83, 118
Steel Impact Protection		21-45, 49-53
Stencil Sets		60-61
Street Bollards		147-149
Surface Repair Kit		68
Suspended Guide Post		119
Swing Barriers		139
T		
Tapes- Anti-slip		55-56
Tape - Floor Marking		57-59
Tape - Hazard Warning		67
THE BERKELEY Recycled Rubber Bollard		147
Tilting Cylinder Posts		115-116
TOPSTOP Speed Reduction Ramps - Virgin Rubber		132
TOPSTOP-ECO Speed Reduction Ramps - Recycled Material		130-131
Torch for Inspection Mirrors		19
Town Bollards		148-149
Traffic Cones		104, 106
TRAFFIC-LINE Barrier Chains		78-79
TRAFFIC-LINE Barrier Posts		90-97
TRAFFIC-LINE Barrier Board Systems		113
TRAFFIC-LINE Barrier Tapes & Tape Stands		109
TRAFFIC-LINE Belt Posts		84-87
TRAFFIC-LINE Bicycle Racks		159-160
TRAFFIC-LINE Blow Moulded Barriers - HDPE		110, 112-14
TRAFFIC-LINE Cable/Hose Protection Ramps		122-124
TRAFFIC-LINE Corner Protection		75
TRAFFIC-LINE Crowd Barriers		110-111
TRAFFIC-LINE Economy Belt Barriers		87
TRAFFIC-LINE Flexible Verge Markers		117
TRAFFIC-LINE Gate Barrier		140-141
TRAFFIC-LINE Guide Post - Suspended		119
TRAFFIC-LINE HD Buffers		76
TRAFFIC-LINE Height Restrictor Bar - Aluminium		146
TRAFFIC-LINE Height Restrictor Bar - Plastic		146
TRAFFIC-LINE Hi-Vis Belt Posts - 3 & 4 metre belt		85
TRAFFIC-LINE Hi-Vis Chain Posts		81
TRAFFIC-LINE Hoop Guards		29-31
TRAFFIC-LINE Impact Protection PU Foam Impact Protection		69-73
TRAFFIC-LINE Kerb Ramps		120-121
TRAFFIC-LINE No Waiting Bollards		105
TRAFFIC-LINE Parking Aids		125-126, 127
TRAFFIC-LINE Parking Bay Markers		125
TRAFFIC-LINE Pedestrian Safety Barriers		112
TRAFFIC-LINE Posts		90-94
TRAFFIC-LINE Railing Systems		150-153
TRAFFIC-LINE Ramps		120-125
TRAFFIC-LINE Removable Barrier Post		90
TRAFFIC-LINE Spring Loaded Post		94
TRAFFIC-LINE Stainless Steel Belt Posts		84
TRAFFIC-LINE Stainless Steel Litter Bins		160
TRAFFIC-LINE Stainless Steel Railing Systems		152-153
TRAFFIC-LINE Traffic Cones		104, 106
TRAFFIC-LINE Traffic Posts		115-117
TRAFFIC-LINE Traffic Posts - with Chain eyes		118
TRAFFIC-LINE Trench Covers		108
TRAFFIC-LINE Vertical Pipe Protectors		22
TRAFFIC-LINE Wall Buffers		74
TRAFFIC-LINE Wall Mounted Belt Cartridges		87-88
TRAFFIC-LINE Wall Mounted Belt Cartridges - Stainless Steel		87
TRAFFIC-LINE Wheelchair Ramps - for Cable/Hose ramps		125
TRAFFIC-LINE Wheel Stops		126
Traffic Mirrors		3-8
Traffic Post - Flexible		115-116
Traffic Post - Off-Highway		116
Traffic Post - with Chain Eyes		118
Trellis Barriers		109
Trench Covers - GRP & HDPE		108
Triangular Mirror		14
TRIO Tripod Traffic Signs - Folding		107
U		
Under-run Guards		34, 36, 41, 47
V		
Verge Markers		117
Vertical Pipe Protection		22
VIEW-MINDER Industrial Duty Mirrors		9
VIEW-MINDER Traffic Mirrors		8
VIEW-ULTRA Traffic Mirrors		3
VISION Inspection Mirrors		19
W		
Wall Buffers		74
Wall Mounted Belt Cartridge		87-88
Wall Mounted Convex Mirrors		10, 12, 16-18
Wall Mounted Bicycle Racks		159
Wall Mounted Pipe/Cable Guards		22-23
Wall Mounted Steel Hoop Guards		30-31
Water filled Barrier - HDPE		114
Wheelchair ramps - for Cable/Hose ramps		125
Wheel Stops		126-127
Wheel Stop - Adhesive		127

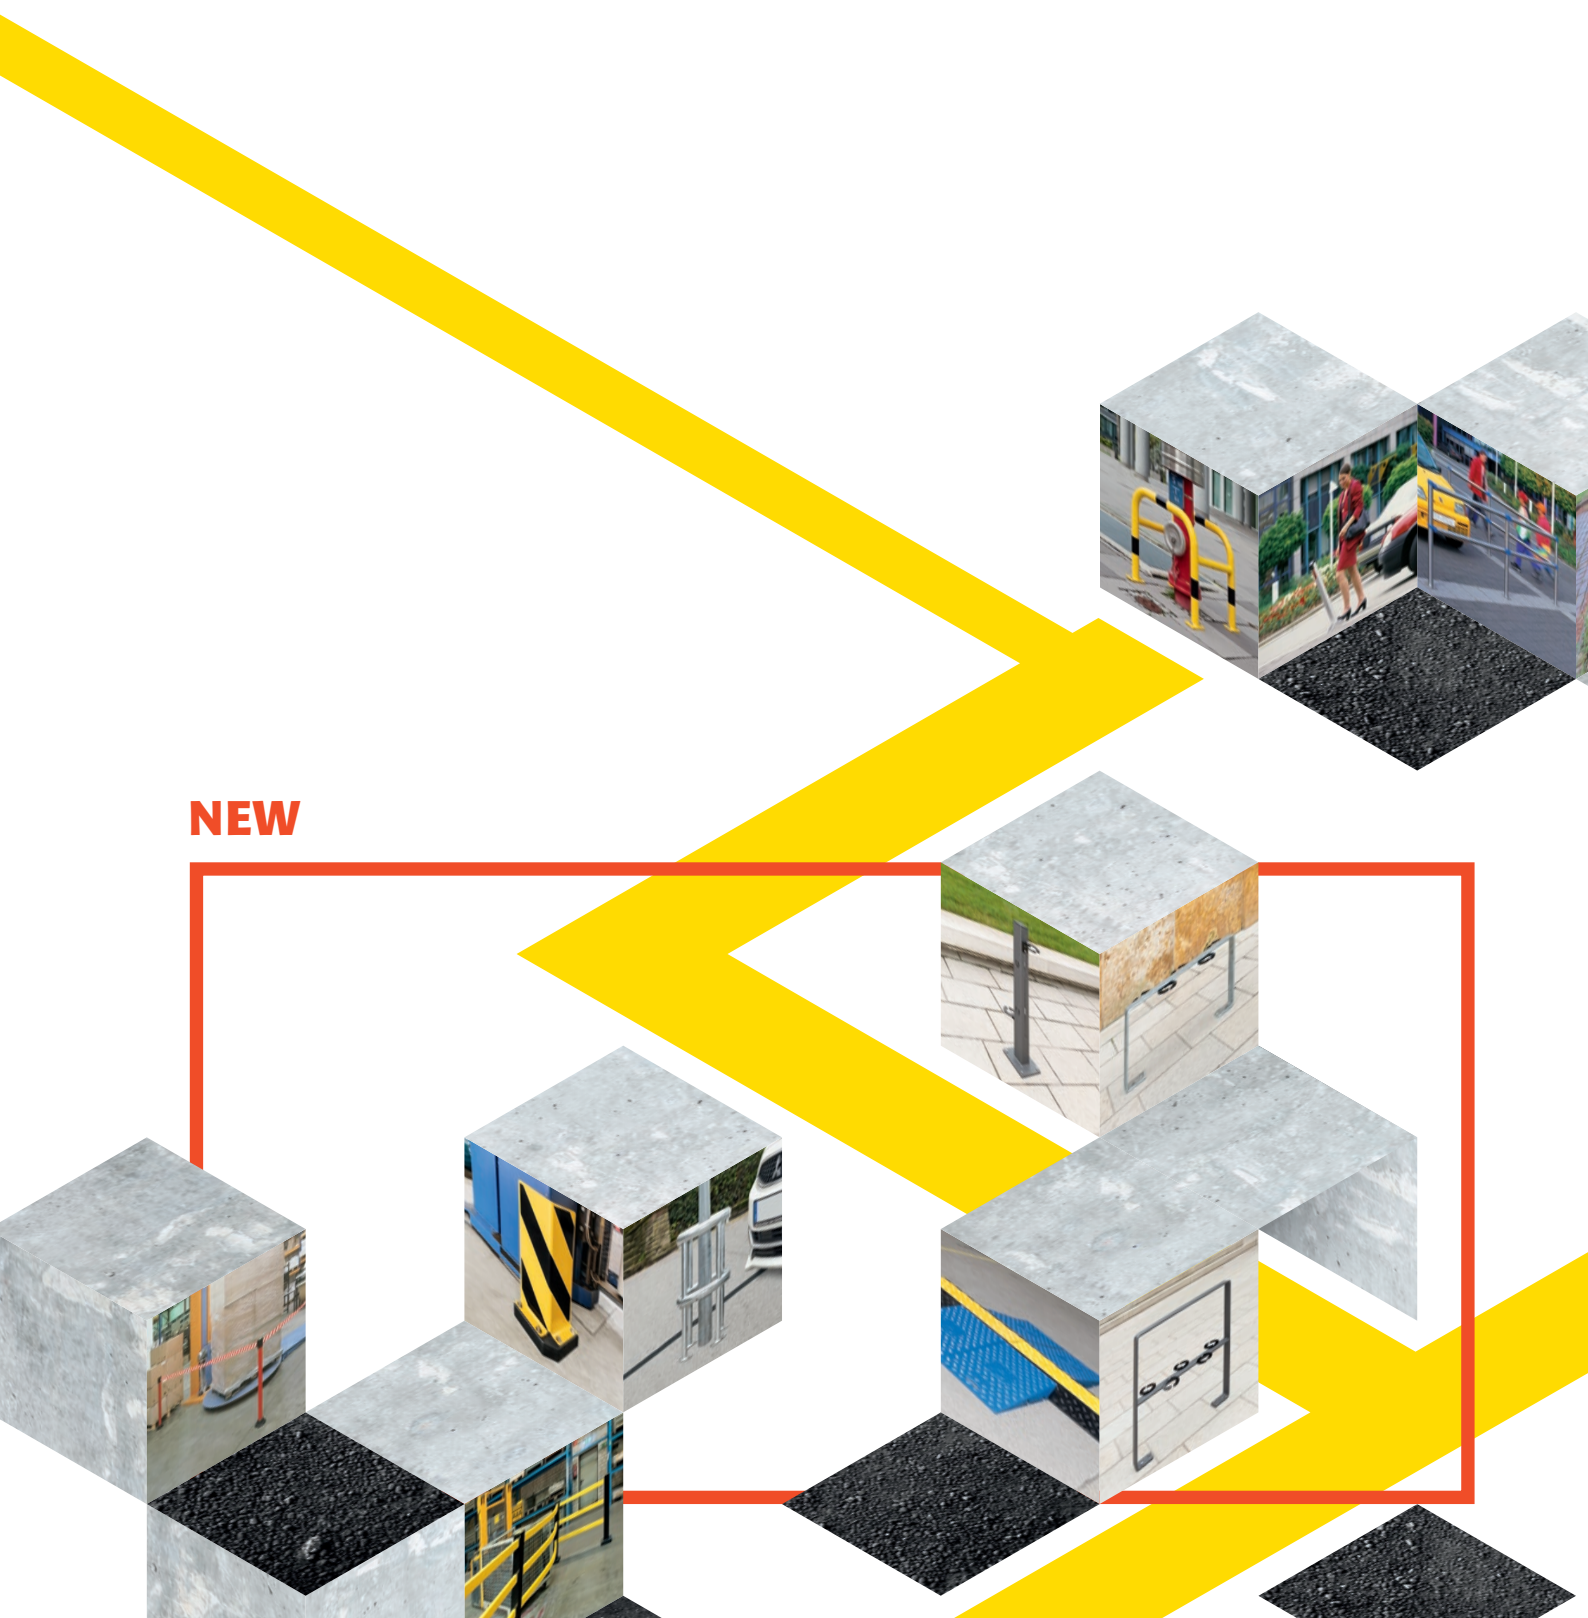

NEW

